



Innovative solutions for sustainable  
power quality since 1969



# LV POWER FACTOR CORRECTION SYSTEMS





## ORTEA SPA

Via dei Chiosi, 21  
20873 Cavenago di Brianza | MB | ITALY  
phone: +39 02 95 917 800  
email: [orteaspa@orteaspa.com](mailto:orteaspa@orteaspa.com)

[WWW.ORTEANEXT.COM](http://WWW.ORTEANEXT.COM)

### OUR BRANDS:



VOLTAGE STABILIZERS  
SAG COMPENSATORS  
LV TRANSFORMERS AND REACTORS



POWER FACTOR CORRECTION SYSTEMS  
ACTIVE HARMONIC FILTERS



ENERGY EFFICIENCY SMART DEVICES



ENERGY SAVING VOLTAGE OPTIMIZERS

[GENERAL  
SALES  
CONDITIONS](#)







# ABOUT US

Innovative solutions for sustainable power quality since 1969

Founded in 1969, Ortea is a leader in the design and manufacture of innovative products and customised solutions for power quality and energy efficiency.

Thanks to a network of offices and dealers on all continents, Ortea products are now installed, maintained and operating in more than 100 countries worldwide.

In line with the strategy of creating a global pole of excellence, the new brand Ortea Next is created in 2019, bringing together the 3 historical product brands - Ortea, Icar and Enersolve - in a single concept of integrated technological offer.

Alongside the standard production, Ortea Next develops and produces equipment that can be customised according to the client's specific requirements with extreme flexibility.

The process of renewal and continuous improvement strengthens Ortea Next's leadership as your ideal partner to meet the challenge of the global energy transition.

## GLOBAL PRESENCE

Ortea Next solutions are already present in a large number of countries with positive, long-lasting results

Thanks to a network of offices and distributors that are strategically distributed, local, fast, and competent assistance is guaranteed.



**ORTEA** <sup>NE</sup><sub>XT</sub>

## MADE IN ITALY

Production quality, attention to details, design, and reliability represent the added value of Made in Italy. All the Ortea Next solutions are devised, designed, produced, and assembled in Italy.

## EXPERIENCE

Founded in 1969, Ortea Next has accumulated experience and expertise that have contributed to continuous growth over time, until becoming an authoritative and innovative company in designing and producing power quality solutions on an international scale.

## RELIABILITY

The certified Company Quality System of Ortea Next guarantees the reliability and longevity of the whole range of products, each of which is strictly controlled and tested.

## CUSTOMIZED SOLUTIONS

In addition to standard production, Ortea Next is able to develop and produce complete and integrated solutions based on the specific needs of each client with extreme flexibility.

Ortea Next is always at your service to evaluate projects and study customised solutions, assisting and supporting the client at each stage of development.

## QUALITY

Ortea Next's certified Company Quality System guarantees that all the production stages are controlled, from the verification of components to the choice of the most suitable packaging depending on the kind of transport.

## RESEARCH & DEVELOPMENT

To ensure innovative solutions, Ortea Next continuously collaborates with universities, institutions, and technological partners in researching and developing new products and reliable technologies.

## EXPERTISE

The experience and expertise of the Ortea Next technicians assist the customer both in the design and service stage, ensuring solidity and reliability in researching the best solution.

## CUSTOMER CENTRIC

Listening to the customer and their requirements allows Ortea Next to continuously improve the service level offered.



## CERTIFIED QUALITY

The conviction that product quality and customer satisfaction must be the main requirements of a modern company has led to the adoption of a certified Company Quality System

After having obtained the first ISO 9001 certification in 1996, today our Company Quality System is certified by Lloyd's Register in compliance with the main standards:

ISO9001 Quality management system

ISO14001 Environmental management system

ISO45001 Occupational health and safety management system

This means that Ortea Next guarantees optimised performance in terms of the internal management of processes, engagement on environmental issues, and attention to occupational health and safety



# POWER QUALITY SOLUTIONS

Paying little attention to the issue of power quality causes problems and damage to equipment and production processes

Ortea Next offers a complete range of integrated products and solutions for power quality and energy efficiency, thanks to the synergy between the Ortea Next brands, Ortea, Icar, Enersolve, and Powersines.

VOLTAGE VARIATION



VOLTAGE STABILIZERS

SAGs / DIPs



SAG COMPENSATORS

UNPROTECTED LOADS



LV TRANSFORMERS AND REACTORS

EXCESSIVE REACTIVE POWER



PFC SYSTEMS

HARMONIC POLLUTION



ACTIVE HARMONIC FILTERS

WASTE OF ENERGY



ENERGY EFFICIENCY  
SMART DEVICES

WASTE OF ENERGY



ENERGY SAVING  
VOLTAGE OPTIMIZERS



# THE 4 REASONS TO HAVE POWER FACTOR CORRECTIONS



Electricity Authorities

The Electricity Authorities, force companies distributing electricity to apply financial penalties to utilities that have a substantial contractual power and low energy cos phi (generally 0,9). The correct power factor of the electric plant allows you to avoid those penalties, which often are not reflected in the bill, and then are paid by the final user without even realizing it.



Economic convenience

Economical benefits due to penalties elimination and current reduction, with consequent optimized dimensioning of the components and increased life expectancy.



Energy efficiency

The power factor correction reduces the "useless" inductive currents required by the loads and that impacts the entire electric network, both in the generation, transmission and distribution stages.

Power factor correction is therefore an important contribution to the energy efficiency of both the user's electrical system and the electricity grid.



Power quality

In many industrial electric plants supplied by MT there is a tension considerably distorted, due often to excessive load of MV/LV transformer.

The correct Power Factor Correction with a consequent load reduction by the transformer allow to bring it back to the operating conditions within the linearity limits, substantially reducing the voltage distortion.

Furthermore the proper Power Factor reduces the presence of harmonic currents.

# SERVICES

It is particularly convenient to install an effective power factor correction system, correctly sized

It is essential to monitor the proper functioning because if you do not keep them in perfect working order, they "lose power", and you are likely to pay penalties.

With proper maintenance you can avoid wasting money and unnecessary power dissipation in the electric plant cables and transformers that undergoes premature aging

It is also important a proper maintenance and use of original spare parts since capacitors, when worn or of poor quality, are likely to burst causing damage to electrical equipment, plant shutdowns due to protection tripping, or even real fire.

We offer a wide range of services to help you in all situations that must be addressed from the choice of the correct power factor correction system, to commissioning, to management, to replacement.

The measurements can be made with an instrument compliant with IEC 61000-4-30 class A, able to check the energy quality according to the indications of the IEC 50160 standard.



Commissioning



Design and production according to User's specification



Design and production for complex plants



Technical training



Check-up of existing systems



Make your own measurement and let us know



Local support



Energy Quality Analysis



Revamping solutions, original spare parts

# GLOSSARY

## Cos phi

Simplifying, in an electrical system is appointed with phi ( $\varphi$ ), the phase shift between the voltage and the electric current at the fundamental frequency of the system (50Hz). The cos phi is therefore a dimensionless number between 0 and 1, and varies from moment to moment.

Typically, an industrial electrical system has an inductive cos phi, which value depends on the characteristics of the user plant.

## Power factor

In an electrical system means, with power factor, the ratio between the active power and the apparent power. Also the power factor is a dimensionless quantity between 0 and 1, which varies from moment to moment. However, the cos phi and the power factor coincide only in systems devoid of sinusoidal harmonic currents. In a system with harmonic, the power factor is always less than the cos phi.

## Monthly average power factor

Electricity bills often show the monthly average power factor, obtained from the ratio between the active power consumed by the user and the apparent power transited the point of delivery. Typically, the average monthly power factor is calculated separately on different time slots.

## Isolation level

For a capacitor that complies with IEC 60831-1, the isolation level is indicative of the voltage pulse that can withstand.

## Insulation voltage

For a power factor correction system that complies with the IEC 61439-1/2, the isolation voltage is indicative of the maximum voltage that can withstand the entire system.

## Nominal voltage of the capacitor $U_n$

It is the rated voltage of the capacitor, at which its output rated power is calculated.

## Maximum operating voltage $U_{max}$

It is the maximum voltage that the capacitor can withstand, for the time indicated by the IEC 60831-1/2.

The following relation applies  $U_{MAX} = 1,1 U_n$

## Rated operational voltage $U_e$

It is the rated voltage of the power factor correction system, which guarantees proper use. A capacitor with a rated voltage can have on board capacitors with voltage  $U_n > U_e$ . It may never happen otherwise.

## Short-circuit current $I_{cc}$

As indicated in the IEC 61439-1, is the prospective short-circuit current that the cabinet can endure for a specified time. It's a value stated by the manufacturer of the cabinet on the basis of laboratory tests. The short-circuit current of the cabinet can be increased, in case of need, by installing fuses. In this case the declared data must be accompanied by the words "fuse conditioning short-circuit current".

## Resonance

In a LV plant, resonance is the amplification phenomenon of harmonic currents generated by one or more non-linear Loads. The LC circuit is responsible for the amplification, consisting of the MV/LV Power Transformer, that feeds that portion of installation, and by the PF improving capacitor bank. To avoid this phenomenon, wherever there is the risk it might happen, the capacitor bank must be equipped with Harmonic Blocking Reactors.

## Steps

They are the physical units (racks) of power factor bank. A rack may be constituted by a single step or more steps. The number of contactors on the front of the rack indicates the number of steps into which that rack is fractionated. The steps can be used individually, or coupled with others: in these cases they are controlled by the same controller contact of the reactive power regulator.

## Electrical steps

It is the internal configurations number which proposes a particular automatic power factor corrector, as a function of the steps (number and power) that has on board. For example, a power factor corrector of 280kvar with steps 40-80-160kvar offers 7 combinations: 40-80-120-160-200-240-280kvar. The greater the number of possible combinations, the better "accuracy" and the flexibility to use the power factor correction bank.

## THD

For a periodic non-sinusoidal wave, the THD is the ratio between the rms of all harmonic components value and the rms value of the fundamental at 50Hz/60Hz.

## THDIc

It is the maximum THD that a capacitor can withstand, with regard to the current passing through it. It is a characteristic value of each capacitor, indicative of its robustness: much higher is the THDIc more robust is the capacitor.

The THDIc is the most significant value to compare different capacitors, together with the maximum temperature of use.

## THDIr

It is the maximum THD bearable by the capacitor relatively to the current that circulates in the plant to be corrected. It is an empirical fact, which is based on the used construction technology and experience of the manufacturer. There is no theoretical link between THDIr and THDIc valid for all plants. The THDIr can also be very different for capacitors with the same THDIc as made by different manufacturers.

## THDVR

It is the maximum voltage THD on the net and also represents the maximum value bearable by a power factor correction bank with harmonic blocking reactors.

## Fd

It is the detuning frequency between inductance and capacitance of a detuned capacitor bank, that is a capacitor bank equipped with harmonic blocking reactors.

The detuning frequency is the most objective parameter for detuned capacitor bank comparison; the lower the detuning frequency is the sounder the capacitor bank is. In particular an 180Hz detuned capacitor bank is sounder and more reliable than another with 189Hz detuning frequency  $f_d$ .

As of Ferranti effect, detuned capacitor bank capacitors are exposed to a voltage that is higher than the rated system voltage; for this reason these capacitors are rated for higher voltage compared to the mains voltage.

The according frequency can also be expressed, indirectly, by indicating the detuning factor p%.



# POWER FACTOR CORRECTION: QUALITY AND SAFETY

We define safety the absence of dangers for people and things while the good is in use or stored in a warehouse. This means to identify stresses, risks and potential damages and the relevant elimination and to keep them under control so that to reduce the risk to a reasonable level

Power capacitors and capacitor banks shall NOT be used:

- for uses other than Power Factor Correction and for AC or DC plants;
- as tuned or detuned filters unless specifically approved in written by Ortea Next.

## General requirement

The capacitors are constructed in accordance with IEC-CEI EN methods, parameters and tests. The low voltage capacitors are assembled with the required protection devices and assembled into banks to give a quality product which will operate safely. They are not considered as the indication that the capacitors and the power factor correction equipments are suitable for a use in the same conditions of the tests. The user has to verify that the capacitor and power factor correction equipment are of the correct voltage and frequency suitable for values of the network on which they are installed. The user has to verify that the installation of the capacitors and/or the power factor correction equipment is in accordance with the catalogue and the instructions of use. Capacitors and power factor correction equipment must not be exposed to damaging action of chemical substance or to attacks of flora and/or fauna. Capacitors and power factor correction equipments must be protected against risks of mechanical damaging to which could be exposed during normal working conditions or during the installation. Capacitors and power factor correction equipments that were mechanically or electrically damaged for any reason during the transport, the storage or the installation must not be used and these that breakdown during use must be immediately removed.

## Additional instructions about power factor correction equipments

### Definition

Power factor correction equipment means:

- one or more groups of capacitors that can be connected and disconnected on the network automatically or manually using suitable operating devices (contactors, circuit breakers, load-break switch...);
- operating devices;

- control, protection and measure systems;
- connections.

The equipment could be open or closed inside a metal enclosure.

### General requirement

Follow instructions in the documentation attached to equipments considering the safe distance, the connection standard criteria, working standards and the instructions for the controls and the maintenance.

### Compatibility

It must be paid attention to the electromagnetic interferences with the near by equipments.

### Contactors

It is advisable to adopt capacitor duty contactors (category AC6-b) because they are equipped with pre charge resistors that substantially reduce the inrush currents while capacitors are switched on.

The early switching on of these resistors in respect to the closing or the contactor contacts, allows:

- to avoid main contacts melting;
- to avoid capacitor damage.

## Recommendations for installation

### Fixing and connection

To fix the power factor correction equipments it is advised to use these types of screws:

- SUPERRiphaso with M10 screw;
- MICROMatic and MICROfix wall-mounted with Fischer 8;
- MINImatic wall-mounted and floor-mounted with M8 screw;
- MULTImatic and MINImatic floor-mounted with M12 screw.

The installation of the power factor correction equipment is for indoor application; for different use call our technical department.

### Protection devices

Operating devices (load-break switch) or operation and protection (circuit-breakers if the cables are longer than 3m) must be dimensioned to withstand capacitive currents (about 1.43 times nominal current), the inrush currents, the number of operations and they must be re-strike free. The capacitors are made of polypropylene that is a flammable material. Even if a fire doesn't begin from capacitors or inside the panel, they could however spread it creating dangerous gasses. If a danger exists from the presence of an explosive or flammable atmosphere, the IEC standard; "Electric equipment with explosion and fire danger", shall be strictly followed. The protection device must never be opened when the panel is in operation with one or more racks inserted.

### Danger for people

When we install power factor correction equipment we must pay attention that the parts which could be exposed to voltage are correctly protected from accidental contacts in accordance with IEC standards.

Before the commissioning verify the tightening of the terminal and of all the bolts is correct.

## Protections

### Overpressure devices

All the capacitors have an overpressure device which when operated, as in the case of breakdown, disconnects the element from use. This device is not a substitution for the fuses or external circuit-breakers that are specified in our power factor correction equipment.

## Limit conditions

The influence of each factor below has not to be considered individually, but in combination and with the influence of other factors.

### Voltage

Capacitor and capacitor bank nominal voltage is intended as the design and testing voltage.

The safe and proper use of power factor correction capacitors and capacitor banks, implies that the working voltage is not higher than the nominal voltage.

In special conditions, excluding the installation phases, higher over voltage are allowed as per below table (ref. IEC 60831).

Overvoltage factor ( $\times U_N$ eff)	Max duration	Observation
1	Continuous	Highest average value during any period of capacitor energization. For period less than 24h, exceptions apply as indicated below
1,10	8h every 24h	System voltage regulation and fluctuation
1,15	30 min every 24h	System voltage regulation and fluctuation
1,20	5 min	Voltage rise due to light loads
1,30	1 min	

*Note: for voltage without harmonics.*

The life expectancy of capacitors and power factor correction equipment is greatly reduced when operating in overload conditions.

The choice of the nominal voltage is determined by the following considerations:

- on some networks working voltage could be very different
- from nominal voltage,
- power factor correction equipment in parallel could cause an increase of the voltage at the connection point;
- the voltage increases with the presence of harmonics on the network and/or  $\cos\phi$  of in advance;
- the voltage at the capacitor terminals increases when capacitors are in series with reactors for harmonic blocking;
- if the power factor correction equipment is connected to a motor and not sized correctly, when we disconnect it from the network we may have a phenomena caused by the inertia that makes the motor to work as a self-excited generator consequently increasing of the voltage level at the terminals of the equipment;
- the remaining voltage caused by the self-excited after that the equipment has been disconnected from the network is dangerous for the generators;
- if the power factor correction equipment is connected to a motor with a star-delta starting device we have to pay attention to not cause the overvoltage when this device is working;

- all the power factor correction equipments exposed to overvoltage caused by atmospheric lightning must be protected in correct way.

If surge arresters are used they should be placed as close as possible to the equipment.

### Working temperature

Working temperature of power factor correction equipment is a fundamental parameter for safe operation.

As a consequence it is very important that heat generated is dissipated correctly and that the ventilation is such that the heat losses in the capacitors do not exceed the ambient temperature limits.

The highest workings temperature in normal service conditions between two capacitors is measured at a point 2/3 of the capacitors height and at a distance of 1cm from them.

The capacitor temperature must not exceed the temperature limits showed in the following table.

Symbol	Ambient temperatures [°C]		
	Maximum	Highest mean over any period of:	
		24h	1 year
A	40	30	20
B	45	35	25
C	50	40	30
D	55	45	35

### Mechanical limits

The user has not to expose the equipment to exaggerated mechanical limits of operation.

The user has to pay attention to the electrical and geometrical dimensioning of the connections to avoid exceeding the mechanical limits which may be reached by temperature variation.

## Other considerations for working safety

### Discharge device

Every capacitor must have a discharge device that can discharge it within 3 minutes.

The discharge time is calculated from the starting peak of voltage equal to  $\sqrt{2}U_N$  until 75V.

Between the capacitor and the discharge system there shall not be a circuit-breaker, fuses or other sectioning devices. This doesn't relief to short-circuit the capacitor terminals and earth every time it is required to handle the capacitor.

### Residual voltage

When the capacitor is placed under tension its residual voltage must not exceed 10% of the rated voltage. This condition is generally satisfied when the power factor correction equipment is calibrated properly, the reactive power controller, reconnection time shall be appropriate to the discharge time.

### Enclosure connection

To keep capacitors enclosure at fix voltage and to discharge fault current toward the case itself, they are grounded by connecting to earth the capacitors supporting frame.

### Altitude

Power factor correction equipment must not be used above an altitude of 2000m. On the contrary please contact technical assistance.

### Particular ambient conditions

Power factor correction equipment are not suitable for the applications in places where there are conditions as follows:

- fast generation of mould;
- caustic and saline atmosphere;
- presence of explosive materials or very flammable;
- vibrations.

For environments with these characteristics: high relative humidity, high concentration of dust and atmospheric pollution, please contact technical assistance.

## Maintenance

After the disconnection of the bank, prior to accessing the terminals of the capacitors wait 5 minutes and then shortcircuit the terminals and earth.

Periodically make these procedures:

Once every 6 months:

- cleanliness by blast of air of the internal part of the power factor correction equipment and of the air filter anytime there is a cooling system;
- visual control;
- control of the ambient temperature.

Once a year:

- control of the surfaces condition: painting or other treatments;
- control of the correct tightening of the screw (this operation must be done before the commissioning);
- checking the contactors status;
- checking the capacitors and chokes (if present) status.

If there are concerns about any environmental conditions an appropriate maintenance program must be established (for example in a dusty environment could be necessary to clean using blasts of air more frequently).

## Storage and handling

The power factor correction equipment handling must be made carefully avoiding the mechanical stresses and shocks.

The equipment in highest cabinet may be hard to handle, because the center of gravity may be very high and decentralized.

Upon receipt of new equipment, make sure that the packaging is not damaged, although mild.

Always make sure that the equipment has not been damaged by transportation: take away the packaging and make a visual inspection with open door. If you discover some damage, write it on the delivery note (carrier copy) the reason for refusal or reserve.

The capacitors and power factor correction awaiting installation storage must be done leaving them in their original packaging, in a covered and dry place.







# INDEX

CHAPTER 1	Pag.
SIZING AND SELECTION CRITERIA	14
CALCULATION OF POWER FACTOR CORRECTION STARTING FROM ENERGY BILL	15
CAPACITORS MODELS AND PERFORMANCES WITHIN POWER CORRECTION SOLUTIONS	17
SOLUTIONS AND COMPONENTS OF AUTOMATIC POWER FACTOR CORRECTION BANKS	18
CHAPTER 2	
POWER FACTOR CORRECTION SOLUTIONS WITH HIGH GRADIENT METALLIZED POLYPROPYLENE CAPACITORS	27
CHAPTER 3	
POWER FACTOR CORRECTION SOLUTIONS WITH HIGH GRADIENT METALLIZED POLYPROPYLENE PLUS CAPACITORS	43
CHAPTER 4	
REACTIVE POWER REGULATOR	59
CHAPTER 5	
DIMENSIONS	68
CHAPTER 6	
TECHNICAL NOTES 73	77
APPENDIX	
TABLE	82

# SIZING AND SELECTION CRITERIA


To correctly correct power factor of a LV electrical system we must start from the target we want to achieve

- a higher power factor as measured “at the energy counter” compared to that imposed by the energy authority for excess of reactive energy consumption, so to avoid penalties and / or risk detachment from the network;
- the reduction of currents (and therefore of joules losses and voltage drops) in longer and intensively loaded plant sections.


Depending on the electrical loads features present in the system (working cycle, power, power factor), topology (radial, ring, etc) and the extension of the plant itself, once calculated the power factor correction requirement, it will be clear how to size the capacitor bank.

## LV PFC methods

The most common methods are distributed power factor correction (each of the utilities is equipped with its own unit for power factor correction, typically fixed) and centralized power factor correction (a single automatic PFC system is installed and dedicated to the whole plant). It is also possible to create “mixed” solutions according to the peculiarity of the plant.

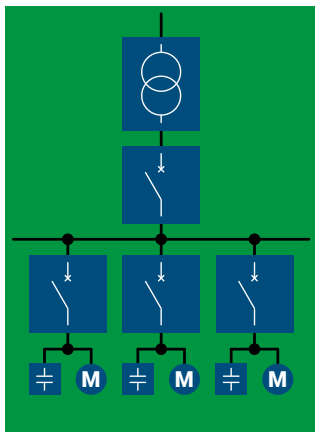

Distributed power factor correction

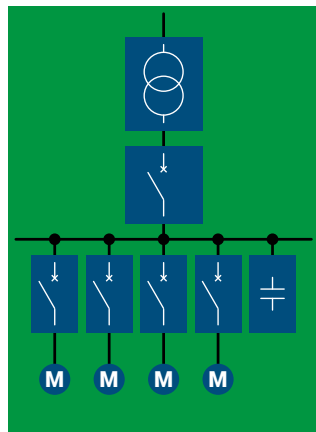

Centralized power factor correction

## PF improvement of an asynchronous motor

Typical application of distributed power factor correction is that for a three-phase asynchronous motor. The PFC unit is chosen from tables, remembering to pay attention to the self-excitation risk.

Motor power		Required reactive power [kvar]				
HP	KW	3000 rpm	1500 rpm	1000 rpm	750 rpm	500 rpm
0,4	0,55	–	–	0,5	0,5	–
1	0,73	0,5	0,5	0,6	0,6	–
2	1,47	0,8	0,8	1	1	–
3	2,21	1	1	1,2	1,6	–
5	3,68	1,6	1,6	2	2,5	–
7	5,15	2	2	2,5	3	–
10	7,36	3	3	4	4	5
15	11	4	5	5	6	6
30	22,1	10	10	10	12	15
50	36,8	15	20	20	25	25
100	73,6	25	30	30	30	40
150	110	30	40	40	50	60
200	147	40	50	50	60	70
250	184	50	60	60	70	80

## PF improvement of a Power Transformer

In MV electrical systems it is useful to compensate for the reactive power of the MV/LV transformer that supplies the LV part of the system. The required power is worked out starting from the percentage of no-load current (I<sub>0</sub>%). In the absence of this data, the following table can be used.

Power transformer [kVA]	Standard		Low losses	
	oil [kvar]	resin [kvar]	oil [kvar]	resin [kvar]
10	1	1,5	–	–
20	2	1,7	–	–
50	4	2	–	–
75	5	2,5	–	–
100	5	2,5	1	2
160	7	4	1,5	2,5
200	7,5	5	2	2,5
250	8	7,5	2	3
315	10	7,5	2,5	3,5
400	12,5	8	2,5	4
500	15	10	3	5
630	17,5	12,5	3	6
800	20	15	3,5	6,5
1000	25	17,5	3,5	7
1250	30	20	4	7,5
1600	35	22	4	8
2000	40	25	4,5	8,5
2500	50	35	5	9
3150	60	50	6	10



# CALCULATION OF POWER FACTOR CORRECTION STARTING FROM ENERGY BILL

The calculation of the size of power factor correction required for the system depends on active power (P), from the value of  $\cos \varphi$  that we want to achieve ( $\cos \varphi_2$ ), and from the existing value of  $\cos \varphi$  of the system ( $\cos \varphi_1$ )

This evaluation can be carried out either from the project data or, for existing plants, from the values shown on the monthly energy bill (for the active power data, refer to the maximum demand active power, or to the contractual active power; or energies consumed in each time band).

In general, the power factor in the F1 and F2 bands is shown on the consumption bill; if not present it can be calculated from the values of active energy  $E_a$  and reactive energy  $E_r$ :

$$\cos \varphi_1 = \frac{E_a}{\sqrt{(E_a^2 + E_r^2)}}$$

Once the  $\cos \varphi_1$  of the system is known, it should be known which is the target ( $\cos \varphi_2$ ) and according to these two data it is possible to identify in table 1 the coefficient with which to multiply the active contract power, so identifying the necessary reactive power.

If there would be a PFC system in the system to be replaced, the reactive power value found must be appropriately increased.

Starting power factor	Target power factor							
	0,90	0,91	0,92	0,93	0,94	0,95	0,96	0,97
<b>0,67</b>	0,624	0,652	0,682	0,713	0,745	0,779	0,816	0,857
<b>0,68</b>	0,594	0,623	0,652	0,683	0,715	0,750	0,787	0,828
<b>0,69</b>	0,565	0,593	0,623	0,654	0,686	0,720	0,757	0,798
<b>0,70</b>	0,536	0,565	0,594	0,625	0,657	0,692	0,729	<b>0,770</b>
<b>0,71</b>	0,508	0,536	0,566	0,597	0,629	0,663	0,700	0,741
<b>0,72</b>	0,480	0,508	0,538	0,569	0,601	0,635	0,672	0,713
<b>0,73</b>	0,452	0,481	0,510	0,541	0,573	0,608	0,645	0,686

Extract from Table 1 (See the full table in the APPENDIX).

## Example

System with contractual power:  
P = 300kW

The Energy bill shows a consumption:  
 $E_a = 32.170\text{kWh}$   
 $E_r = 32.652\text{kvarh}$

We calculate the value of  $\cos \varphi_1$ :

$$\cos \varphi_1 = \frac{32170}{\sqrt{(32170^2 + 32652^2)}} = 0,7$$


In the table, by choosing 0.70 as the initial power factor and 0.97 as the final power factor, we identify a coefficient equal to 0,77.

The reactive power requirement is therefore equal to:

$$Q_c = 0,77 \times 300 = 231\text{kvar}$$

In the plant there is an old PFC system of 190kvar rated power, but now able to supply 100kvar only (measured with ammeter clamps).

The actual reactive power requirement is therefore equal to 331 kvar.

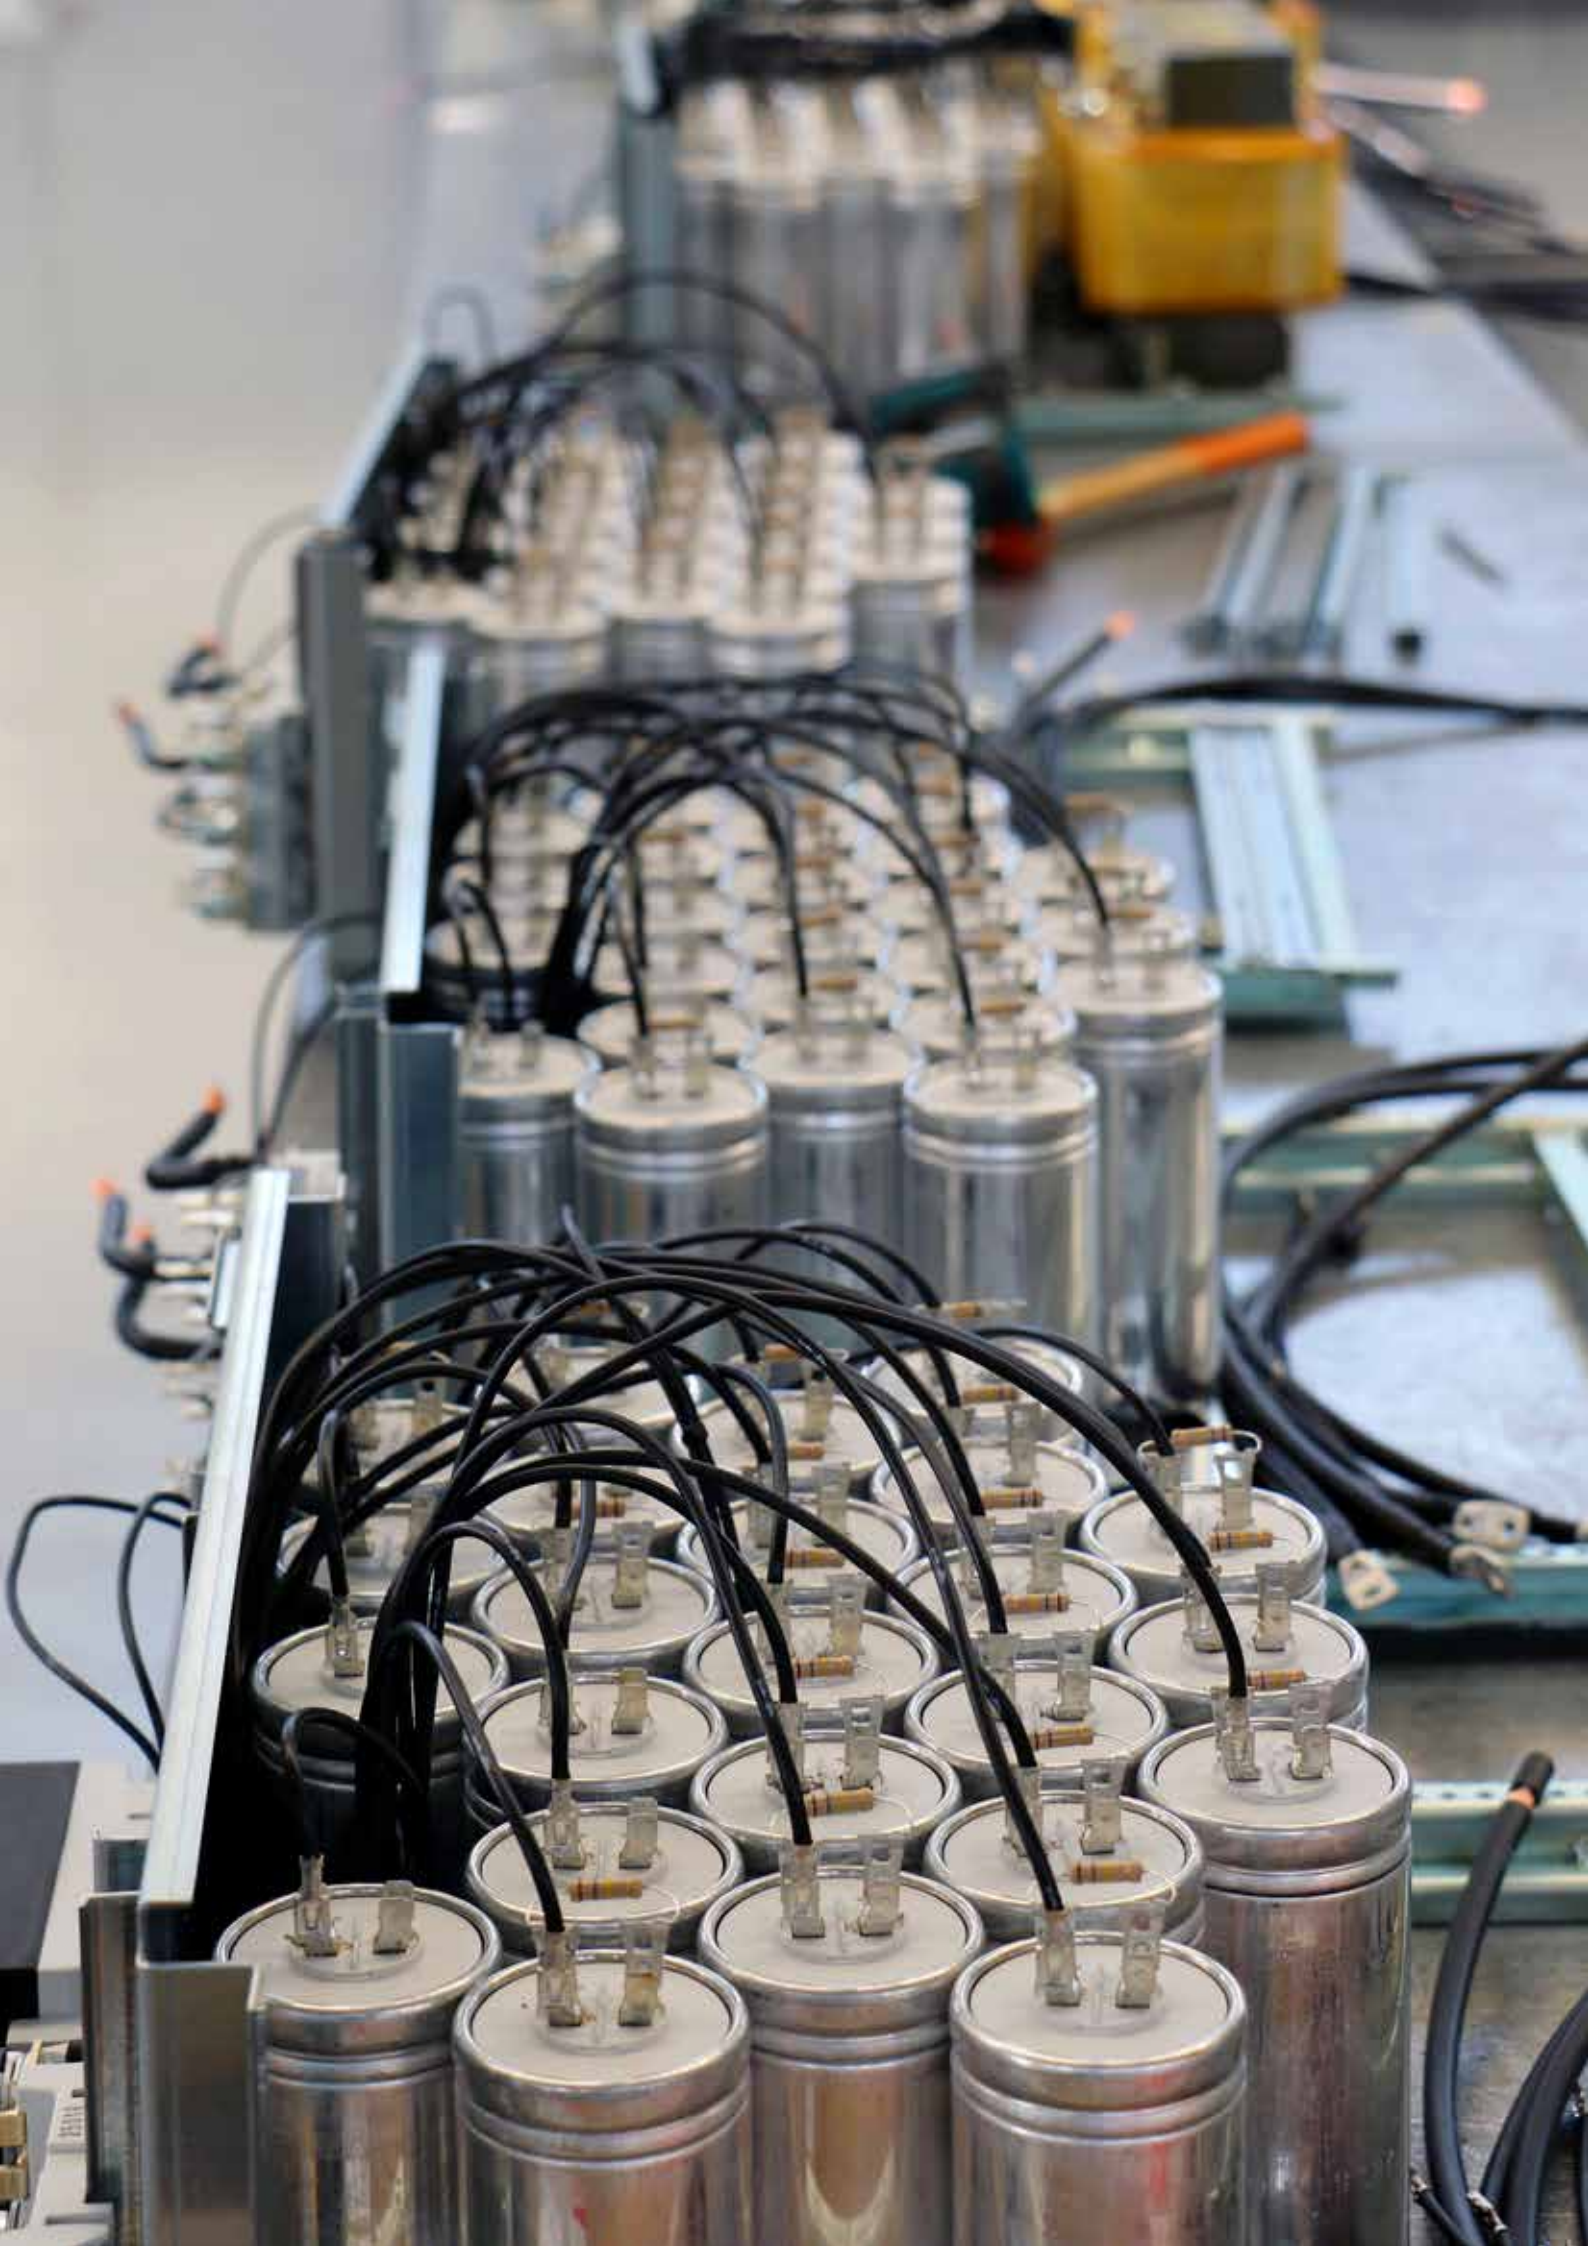

# CAPACITORS MODELS AND PERFORMANCES WITHIN POWER CORRECTION SOLUTIONS

Once defined the power factor correction required for the plant and the type to be applied (centralized, distributed, mixed), it is a matter of choosing the equipment according to the market offer.

The main element of a power correction system is the capacitor: it is therefore important to choose it strong and of good quality



## High gradient metallized polypropylene capacitors



They are dry capacitors made by wrapping a high gradient metallized polypropylene film with metal layer thickness modulated and filled with resin.

The metallization thickness modulation allows to greatly improve the capacitors in terms of:

- increase in power density (kvar/dm<sup>3</sup>) with a consequent power size reduction of the power factor correction systems;
- robustness improvement against voltage surges, for greater reliability even in systems with the presence of voltage fluctuations due to the network or maneuvers on the system;
- improved behavior of the internal short circuit withstand.



## High gradient metallized polypropylene plus capacitors



They are dry capacitors made by wrapping a high gradient metallized polypropylene film realised with "wavy cut" technology with metal layer thickness modulated and filled with resin. The thickness of the polypropylene film is greater than for standard capacitors. The constructive characteristics allow the operation even at high ambient temperatures, as shown in the table below. They are used in power factor correction systems particularly suitable for heavy duty use.

## Main features of the different types of capacitors

	High gradient metallized polypropylene capacitors		High gradient metallized polypropylene plus capacitors	
Temperature category (IEC 60831-1)*	<b>-25/D</b>		<b>-25/+70 °C</b>	
Max overload	1,3xIn	continuous	1,3xIn	continuous
	2xIn	380s every 60 min.	2xIn	500s every 60 min.
	3xIn	150s every 60 min.	3xIn	180s every 60 min.
	4xIn	70s every 60 min.	4xIn	90s every 60 min.
	5xIn	45s every 60 min.	5xIn	50s every 60 min.
Life expectancy at temperature cat. -25/D	<b>100.000h</b>		<b>150.000h</b>	
Life expectancy at climatic category	100.000h		100.000h	

\* Max operating temperature: it is the one measured in the environment surrounding the capacitor.



# SOLUTIONS AND COMPONENTS OF AUTOMATIC POWER FACTOR CORRECTION BANKS

In the majority of industrial plants the power factor correction system is centralized, with high capacity capacitor banks usually equipped with harmonic blocking reactors to protect capacitors from harmonics in the current

When choosing a capacitor bank, it is necessary to pay attention not only to the quality of the capacitors inside the cabinet, but also to the quality of the other components and to the different solutions adopted by the manufacturer, in order to choose a device which will be efficient, long-lasting and easy to maintain.



## Internal structure

Ortea Next manufactures all Icar brand APFC with removable rack. It is preferable to choose a capacitor bank with removable racks: it's the best way to reduce time and problems during maintenance.

## Regulator

It is the intelligent element, which controls the capacitor bank, so it is very important. The regulators on board the Icar brand APFC are all microprocessor-based, with several measuring and alarm functions: they will help you understand how the APFC works and how the electrical system to be rephased behaves. You will appreciate it a lot during the capacitor bank's life and in particular when there will be problematic situations.

## Contactors

In order to guarantee excellent long life and reliability, Ortea Next uses only good well-executed contactors. For standard PFC systems, contactors have to be with damping resistors to limit capacitors inrush current (AC6-b). For detuned PFC systems are enough standard contactors (the function of the peak smoothing It is performed by the blocking reactance).

## Load break switch

It is the operation element, the one which has to bear the current of the capacitor bank also in case of overload. According to IEC 60831-1 regulation it has to be dimensioned with a nominal current which is at least 1.43 times the nominal current of the capacitor bank.

## Steps

Ortea Next manufactures Icar brand APFC with a step-by-step that can ensure good accuracy in the correction of the power factor. Typically Ortea Next realizes its APFC with linear steps, which allows the optimization of the number of electrical combinations obtainable.

## Blocking reactors

In detuned APFC, intended for plants with distorted currents and/or resonance risks, the reactors are intended to defend capacitors from harmonic currents, which would damage them. Ortea Next designs and builds most of the reactors used in its Icar brand APFC, based on the considerable experience gained.

## Ventilation

The APFC are all made with forced ventilation. This reduces the thermal stress of the on-board capacitors, whether electrically (harmonic overload) and/or ambient (high temperature in the cabin).

## Filters for the ventilation system

They protect the capacitor bank from the entrance of dust and foreign bodies, which could worsen its thermal situation. During the commissioning, especially if with cable arrival from below, it must be carefully placed so that inbound there are no alternative routes for cooling air: this occurs through the opening of cables passage, if it is not sealed appropriately with ad hoc shaped sets or foams.

## Fix power factor correction systems



### SUPERriphaso

Fixed Power factor correction for three-phase systems, modular plastic housing with IP40 protection degree. The modularity of the family SUPERriphaso allows to obtain the necessary power composing more modules with a simple and quick electrical and mechanical connection. The SUPERriphaso can only be installed in a vertical position. For powers from 5 to 50kvar at 400V.



### MICROfix

Power factor correction for fixed three-phase systems, in metal enclosure with IP3X protection degree. MICROfix is equipped with an integrated door lock isolating switch, signal lamps and fuses. For power up to 75kvar at 400V.

## Automatic power factor correction systems



### MICROmatic

It is the smaller size of automatic power factor correction bank, suitable for small users power factor correction. It is made with modular concept (MICROrack) to simplify the management of spare parts and maintenance. Allows you to have up to 19 steps for optimal power factor correction in the presence of highly variable loads or characterized by long periods of "no load" operation. For reactive power up to 64kvar at 400V in very small dimensions.



### MINImatic

For small/medium powers automatic power factor correction, depending on the version. It is made with completely removable rack (MINIRack) to simplify management and maintenance. Very flexible Framework, allows the realization of many variations as shown in the available options table. MINImatic is also available in a version with harmonic blocking reactors and cable entry from bottom. For reactive power up to 225kvar at 400V.



### MIDImatic

For medium powers automatic power factor correction, it is made with easily removable racks, and is also available in the detuned version. It shares many components (including racks) with the mirrored MULTImatic families, for greater robustness and ease of regaining spare parts. Choice of cable entry (top/bottom). For reactive power up to 450kvar at 400V.



### MULTImatic

Power factor correction automatic for large users, allows systems of up to several Mvar, thanks to master-slave logic. MULTImatic is made with rack (MULTItrack) for easy replacement and maintenance. It is available also in SPEED series (for fast loads), detuned, IP55 (where IP4X wasn't enough), with cable entry from top or bottom. The distribution of power is with robust aluminium bars (copper on request). Frameworks of standard equipments made from multiple columns side by side are equipped with a disconnector and a cable entry in each column. Available framework on multiple columns with one single cable entry (consult us).

Note: All fixed and automatic systems must only be mounted in a vertical position.



# Automatic Capacitor Banks: standard equipment

Common features to all automatic banks:

- PFC regulator with temperature control;
- RAL 7035 colour;
- working voltage Ue of 400V (for different voltage consult us).

	MICRO matic	MINI matic	MIDI matic	MULTI matic
Cable incoming	top/bottom	top	bottom	bottom*
Ventilation	forced	forced	forced	forced
Regulator	5LGA	5LGA	8LGA**	8BGA
Degree of protection	IP3X	IP3X	IP3X	IP4X

\* MULTImatic has, in standard, a disconnecter and a cable entry for each column. For versions of multiple columns with single cable entry consult us.  
\*\* MIDImatic FH20 is equipped with 8BGA.

## Option

The banks can be made with the following optional equipment: consult us.

	MICRO matic	MINI matic	MIDI matic	MULTI matic
Cable incoming top/bottom	yes	yes (4)	yes (4)	yes (4)
IP55 Degree (cable incoming)	no	yes (bottom)	no	yes
Remote communication (1)	no	no	yes	yes
Control and protection module MCP5	no	no	yes (FH20)	yes (2)
Other paint color (upon request)	yes	yes	yes	yes
Automatic circuit breaker	no	yes (5)	yes	yes
Fuse melting signaling	no	yes	no	yes
Other Short Circuit fault withstand level	no	no	no	yes
Thyristor Switched bank (3)	no	no	no	yes
Controller Remote Software	yes	yes	yes	yes
Modem for Remote Control	no	no	no	yes
Fused main Switch	no	yes	yes	yes

(1) The regulator can be equipped with additional modules to communicate.  
(2) For better protection of power factor correction system against max THD and max Temp. MULTImatic of FH20, FH30, FV25, FV25V, FV35 "detuned" families are equipped in standard with integrated MCP5 in the RPC 8BGA controller.  
(3) The static switches replace the normal electromechanical contactors and allow the cos  $\varphi$  adjustment even in the presence of loads with sudden changes in absorption.  
(4) To be specified in the order.  
(5) Contact us. .

## Thyristor Switched Capacitor Banks (speed)

MULTImatic equipment can be made in SPEED version with thyristor switches for the purpose of obtaining an insertion/disconnection speed suitable for rephasing extra-fast industrial loads.

By this solution the following performances are available:

- switching speed: all the reactive power of the bank can be switched in about 60 ms. This is particularly suitable for plants characterized by fast changing loads (mixers, robots, welders) that could create problems to traditional electromechanic contactors used in standard power factor correction banks;
- capacitor switching with minimization of the transient current peak. Particularly suitable for plants which power factor correction banks has to perform a great numbers of maneuvers and in presence of devices sensitive to transient over voltage/currents;
- silence: with no mechanical components on the move, the real time capacitor banks are really suitable for applications where the installation of the power factor correction switchboard occurs near places which require minimum noises (banks, data elaboration centres, theatres, cinemas, libraries, schools, etc);
- reduced maintenance: the lack of mechanical parts reduces the stress on the switchboard which therefore needs a little periodical maintenance compare to systems with traditional electromechanical contactors. This characteristic is really useful in rooms with conducting powder that could through the conductors into crises.

## Power Factor Correction Tuned Filters

MINImatic, MIDImatic and MULTImatic can be used for perform harmonic filtering.

They are banks with reactance connected in series to the capacitors. The LC circuit made in this way, has a network resonant frequency that is different from the network frequency (50Hz) and depending on the electric values of the components used (resistance, capacity, inductance) are obtained "detuned" filters or "absorption" filters. These are preferable solutions for those plants characterized by the presence of harmonics due to distorting loads (lighting, power electronics, induction ovens, welders etc), for the reasons described below.

### Blocking (detuned) filters

The detuned filters are designed to power factor correction of a system characterized by the presence of harmonics, "protecting" the capacitors that would be damaged. The addition of the filter does not change the system harmonic content: the harmonics will continue to flow without "enter" into power factor corrector.

The blocking filters have a tuning frequency  $f_D$  lower than that of the harmonic current that circulates in the system with lower order (typically the 5th): a blocking filter is much more robust the lower its tuning frequency. Typically, the tuning frequency  $f_D$  is 180-190Hz, but in systems with particularly high harmonic content, we realize blocking filters tuned to 135-140Hz and therefore particularly sound.

The tuning frequency of a barrier filter can also be expressed with other indicators:

- order of harmonicity  $N$ ;
- barrier factor  $p$  (also called "relative impedance" in the IEC 61642 art 2.5), which is usually expressed as a percentage.

Here are the relationships that link these quantities, indicating with  $f$  the network frequency,  $X_C$  the capacitive impedance of the capacitors and  $X_L$  the inductive impedance:

$$f_D = \frac{X_L}{X_C} \quad N = \frac{f_D}{f} \quad f_D = \frac{f}{\sqrt{p}}$$

Due to the Ferranti effect, in the detuned systems the voltage which insists on the capacitors ( $U_C$ ) is higher than that of the network  $U$  according to the following relation:

$$U_C = \frac{U}{1 - p}$$

For this reason the capacitors in detuned systems have to be selected with a suitably high nominal voltage.

### Absorption passive filters

Absorption filters are meant for plant power factor correction capacitors and, at the same time, totally or partially solve the problem of plant harmonics. The filter is tuned near the harmonic frequency to be eliminated and, consequently, that current will almost completely flow in the filter, leaving the electric circuit "clean".



## Selection criteria depending on the type of plant

The choice of power factor correction equipment must be made by evaluating the design data of the system or, better yet, your electricity bills.

The choice of the power factor correction type must be carried out according to the following table, which shows on the ordinate the rate of harmonic distortion of the plant current (THD<sub>IR</sub>%) and in abscissa the ratio between the reactive power Q<sub>c</sub> (kvar) of the PFC bank and LV/MV transformer apparent power AT (kVA).

In light of these data, it identifies the box with proposed families, starting from the family that ensures the proper functioning with the best quality/price ratio.

So you choose the automatic power factor corrector series.

The fixed power factor correction must have the same electrical characteristics of the automatic.

The table was made starting from the following assumptions:

- network voltage 400V;
- initial power factor of the plant 0.7 inductive;
- power factor target 0.95 inductive;
- non linear load with 5°-7°-11°-13° harmonics current. High frequency harmonics are not allowed.

The hypotheses used are general and valid in the most of cases. In particular situations (harmonics coming from other branch of network, presence of rank equal to or a multiple of 3 harmonics) previous considerations may be invalid. In these cases, the guarantee of a correct choice of the equipment occurs only as a result of a measurement campaign of harmonic analysis of the network and/or the appropriate calculations.

Ortea Next disclaims any responsibility for incorrect choice of the product.

## PFC systems selection guidelines

	Q <sub>c</sub> / AT ≤ 0,05		0,05 < Q <sub>c</sub> / AT ≤ 0,1		0,1 < Q <sub>c</sub> / AT ≤ 0,15		0,15 < Q <sub>c</sub> / AT ≤ 0,2		0,2 < Q <sub>c</sub> / AT ≤ 0,25		Q <sub>c</sub> / AT > 0,25	
THD <sub>IR</sub> % > 27	HP10	VP10	FH20 FH30	FV25	FH20 FH30	FV25	FH20 FH30	FV25	FH20 FH30	FV25	FH20 FH30	FV25
20 < THD <sub>IR</sub> % ≤ 27	HP10	VP10	FH20 FH30	FV25	FH20 FH30	FV25	HP20	VP20	HP30	VP20	FH20 FH30	FV25
12 < THD <sub>IR</sub> % ≤ 20	HP10	VP10	FH20 FH30	FV25	FH20 FH30	FV25	HP20	VP20	HP30	VP20	FH20 FH30	FV25
THD <sub>IR</sub> % ≤ 12	HP10	VP10	HP20 HP30	VP20	HP30	VP20	HP20	VP10	HP30	VP20	FH20 FH30	FV25

The table relates to standard power factor correction for 400V networks. For networks with different voltages, consult us.

## Application example

As an example:

- consider a MV connected system through a MV/LV 1000kVA transformer, and with a THD<sub>IR</sub>% equal to 25%;
- assuming that the power factor correction system to be installed has a reactive power of 220kvar, the ratio Q<sub>c</sub>/AT is equal to 0.22;
- the recommended power factor correction is therefore that in the box identified from the abscissa 0.2 < Q<sub>c</sub>/AT ≤ 0.25 and the ordinate 20 < THD<sub>IR</sub>% ≤ 27%.






You can choose an HP30 family device, or go to the VP20 family.

The choice of the power factor correction unit needed for the installation must be made by evaluating the design data of the installation or, even better, the electricity bills.

## Standard power factor correction

The standard power factor correction is used in those plants where there are no current heavily deformed (verify the THD% data of the system current, which must be less than THDIR% of the selected power factor correction family) or resonance problems (see the table selection criteria).

If the harmonics presence in the plant is not negligible, are preferred solutions with reinforced capacitors (i.e. with an higher nominal voltage than that of the network).

	Capacitor construction technology	Range and nominal values	FIX		AUTOMATIC			
			SUPER riphaso	MICRO fix	MICRO matic	MINI matic	MIDI matic	MULTI matic
	High gradient metallized polypropylene	HP10	THDIR ≤ 12% THDIC ≤ 50% UN = 415V	✓	✓	✓	✓	✓
	High gradient metallized polypropylene	HP20	THDIR ≤ 20% THDIC ≤ 70% UN = 460V	✓	✓	✓	✓	✓
	High gradient metallized polypropylene	HP30	THDIR ≤ 27% THDIC ≤ 85% UN = 550V	✓		✓		✓
	High gradient metallized polypropylene plus	VP10	THDIR ≤ 27% THDIC ≤ 85% UN = 400V	✓	✓	✓		✓
	High gradient metallized polypropylene plus	VP20	THDIR ≤ 27% THDIC ≤ 90% UN = 460V	✓		✓		✓

The table relates to standard power factor correction for 400V networks. For networks with different voltages, consult us.

## Power factor correction with blocking reactors

The power factor correction with blocking reactors (this solution is called in different ways in the technical literature such as "blocking filters", or "detuned filters", or "detuned power factor correctors", etc.) is a solution used when a current flows in the electric system with a high harmonic content (THD) and / or with the resonance risk with the MV/LV transformer.






In these cases, the installation of a "normal" power factor corrector, devoid of blocking reactors, can cause the rapid degradation of the capacitors and cause dangerous electrical and mechanical stresses in the components of power plant (cables, busbars, switches, transformers).

Chokes protect the capacitors by harmonics and at the same time exclude the resonances risk; leave without sacrificing the harmonic content of the current system (if you want to reduce the system harmonic content, you must install active or passive filters. Consult us).

This type of power factor correction is therefore to be preferred for systems with important non-linear loads (lighting not luminescent, power electronics, VSD, soft starters, induction furnaces, welding machines, etc.).

Ortea Next offers two types of solutions with power factor correction with blocking reactors: one with 180Hz blocking frequency (detuned to 3.6 times the line frequency) and another one with 135Hz (2.7). It's correct noting that the lower the tuning frequency is the more robust is the cabinet, because the reactor should have a larger iron core.

Ortea Next power factor correction solutions with blocking reactor, are made with inductors produced in-house. In addition are used only capacitors with rated voltage higher than that of the network, to ensure strength and durability counteracting the Ferranti effect (permanent overvoltage on the capacitor due to the blocking inductance).

	Capacitor construction technology	Range and nominal values	FIX		AUTOMATIC			
			SUPER riphaso	MICRO fix	MICRO matic	MINI matic	MIDI matic	MULTI matic
	High gradient metallized polypropylene	FH20	THDIR < 100% THDVR ≤ 6% UN = 550V fd = 180Hz (n=3,6)	✓		✓	✓	✓
	High gradient metallized polypropylene	FH30	THDIR < 100% THDVR ≤ 6% UN = 550V fd = 135Hz (n=2,7)			✓		✓
	High gradient metallized polypropylene plus	FV25	THDIR < 100% THDVR ≤ 6% UN = 460V fd = 180Hz (n=3,6)	✓				✓
	High gradient metallized polypropylene plus	FV25V	THDIR < 100% THDVR ≤ 8% UN = 460V fd = 180Hz (n=3,6)					✓
	High gradient metallized polypropylene plus	FV35	THDIR < 100% THDVR ≤ 6% UN = 550V fd = 135Hz (n=2,7)					✓

The table relates to standard power factor correction for 400V networks. For networks with different voltages, consult us.

## Selection of the CT, its position and how to connect it to the APFC bank

The electronic regulator installed on the capacitor bank calculates the power factor of the plant that has to be corrected by measuring a phase to phase voltage and the related 90° lagging current.

The wiring which is necessary to obtain the signal is realized inside the APFC bank, therefore for a correct operation it is necessary to properly choose, position and wire the CT, which is not included in the capacitor bank.

The CT has to be chosen according to the characteristics of the load that has to be compensated and to the distance between its point of installation and the regulator:

- The primary of the CT has to be chosen according to the current absorbed by the loads that have to be compensated; it does not depend on the power of the APFC bank. The primary has to be approximately the same (or slightly higher) of the maximum current which can be absorbed by the load. However it is better not to choose a CT with an excessive primary: if this happens, when the load will absorb a limited current the CT will supply to the secondary a current which will be too weak to be calculated by the regulator. For example, if the load that has to be compensated has a maximum absorption of 90A, it is advisable to choose a CT with a 100A primary;
- the secondary of the CT must be 5A. If you want to use a CT with 1A secondary you will have to parameterize the regulator;
- the performance of the CT (apparent power) must be chosen taking into consideration the dissipation of the cable which connects the CT to the APFC bank. The table below shows how many VA are dissipated for each linear meter of a cable with different sections: to correctly calculate the wiring dissipation you need to consider the total route of the cable (way there and way back);

Cable section [mm <sup>2</sup> ]	VA for each meter of cable a 20°C <sup>1</sup>
2,5	0,410
4	0,254
6	0,169
10	0,0975
16	0,0620

1. For each 10°C of temperature variation, the VA absorbed by the cables increase by 4%, the above values are extracted from the typical resistance of flexible class 5 cables.

- the precision of the CT is very important to avoid problems of bad functioning of the APFC bank. Choose class 1 CT or, even better, class 0,5.

The wiring has to be carried out with an appropriate section, to not excessively weaken the signal coming from the secondary of the CT: choose a 2,5mm<sup>2</sup> cable section only if the wiring between the CT and regulator is 1 m max. Use cable section at least 4mm<sup>2</sup> for wirings up to 10m, 6mm<sup>2</sup> up to 20m and 10mm<sup>2</sup> for more than 20m wirings (however not recommended).


Connect to earth one of the two clamps of the CT.

It is strongly recommended to use a dedicated CT for the APFC bank, to avoid to put in series more than one device (ammeter, multimeter) on the same CT.

### Position of the CT

As before mentioned, the electronic regulator installed on the APFC bank accurately calculates the cosφ of the plant if it can measure a phase to phase voltage and the related 90° lagging current.

Since the wiring is already internally carried out on the APFC bank on L2 and L3 phases downstream the load break switch (clamps 9 and 10, see the scheme), the CT must be positioned on phase L1 of the power cable upstream the APFC bank (below image, in green). The side of the CT with P1 (or K) mark has to be oriented to the line (upstream). The wiring of the secondary of the CT (clamps S1 and S2) to the APFC bank (clamps L and K) is made by the customer, according to the instructions in the previous points.

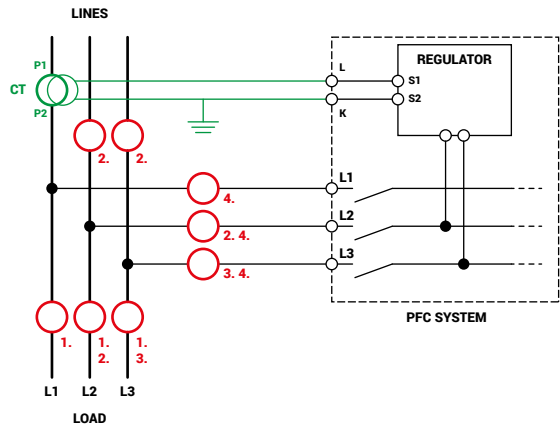

Please note that possible positions here below indicated in red are wrong because:

1. CT is downstream the APFC bank.
2. CT is on the wrong phase (L2).
3. CT is on the wrong phase (L3).
4. CT is installed on the cable goes to the APFC bank.

For further information read the regulator's manual.



## Selection of APFC bank protection device

The low Voltage APFC bank equipped with self-healing capacitors are compliant with IEC EN 60831-1/2 (capacitors) and IEC EN 61439-1/2, IEC EN 61921 (complete devices) regulations.

According the above-mentioned regulations, the capacitor bank must be able to work in continuous supporting an rms value of 1.3 times the nominal current (this regulation takes into consideration that, when harmonics are present in the system, capacitors are overloaded).

Known this, and considering that APFC banks can have a tolerance on the nominal reactive power up to 10% more than nominal one, it is possible to indicate the calculation necessary for the choice and setup of the protection device to be installed upstream the APFC bank (Circuit Breaker or Fused Load Break Switch).

### Calculation of the current

Maximum absorbed current:

$$I_{n_{\max}} = 1,3 \times 1,1 \times \frac{Q_n}{\sqrt{3} \times V_n} = 1,43 I_n$$

Where  $I_n$  is the nominal current of the device calculated with the data present on the label, that is to say  $V_n$  (nominal voltage of the network) and  $Q_n$  (nominal reactive power of the APFC bank at the nominal voltage of the network).

It is therefore necessary to choose and install a protection device (Circuit Breaker or Fused Load Break Switch) with current  $\geq I_{n_{\max}}$ , value according to which it has to be dimensioned the cable (or bars) which supply the APFC bank.



On board capacitors technology:

- High gradient metallized polypropylene
- High gradient metallized polypropylene plus

Range

Main technical characteristics

Breve descrizione

Available solutions

Common technical characteristics

CHAPTER 2

HP10

Automatic PFC system

MICROmatic | MINImatic | MIDmatic | MULTImatic

Ue	Un	UMAX*	f	THDi%	THDiC%**
415V	415V	455V	50Hz	≤12%	≤50%

\* Maximum admissible value according to IEC 60831-1.

\*\* Attention: in this conditions of load network harmonic amplification phenomena is possible.

Generalities

- Zinc-passivated metallic enclosure painted with epossidic dust paint, colour RAL 7035.
- Auxiliary transformer to separate power and auxiliary circuit parts (110V).
- Load-break switch with door interlock.
- Special contactors with damping resistors to limit capacitors inrush current (AC6b).
- FS17 450/750V self-extinguish cable according to EN 50525 - EN 50575 - EN 50575/A1.
- Microprocessor Power Factor Correction relay.
- CRM25 single phase self-healing metallized polypropylene capacitor with Un=415V rated voltage.

Technical characteristics

Rated operational voltage	Ue=400-415V
Rated frequency	50Hz
Max current overload In (bank)	1.3 In
Max current overload In (capacitors @40°C)	1.3 In (continuous) 2 In (x380s every 60 minutes) 3 In (x150s every 60 minutes) 4 In (x70s every 60 minutes) 5 In (x45s every 60 minutes)
Max overload Vn (bank)	1.1xUe
Max overload Vn (capacitors)	3xUn (for 1 minute)
Insulation voltage	690V
Temperature class (bank)	-5/+40°C
Temperature class (capacitors)	-25/+55°C
Discharge device	mounted on each bank
Installation	indoor
Service	continuous
Internal connection	delta
Operation devices	capacitors contactors (AC6b)
Total losses	~ 2W/kvar
Inner surface finish	zinc passivation
Standards (bank)	IEC 61439-1/2, IEC 61921
Standards (capacitors)	IEC 60831-1/2

Part number	Power [kvar]		Steps Un=400V	Electrical steps number	Banks [kvar]	LBS <sup>1</sup> [A]	Icc <sup>2</sup> [kA]	ppp relay	Weight [kg]	Dimensions (see chap. 5)			
	Ue=415V	Ue=400V								IP3X	IP4X	IP5S <sup>3</sup>	
MICROmatic													
ICDAKF214050652	14	12.6	1.8-3.6-7.2	7	1.8-3.6-7.2	63	50	SLGA	12	49	-	-	
ICDAKF220050652	20	18	3.6-7.2-7.2	5	3.6-7.2-7.2	63	50	SLGA	13	49	-	-	
ICDAKF228050652	28	25.2	3.6-7.2-14.4	7	3.6-7.2-14.4	80	50	SLGA	14	49	-	-	
ICDAKF236050652	36	32.4	3.6-2x7.2-14.4	9	3.6-2x7.2-14.4	100	50	SLGA	18	50	-	-	
ICDAKF244050652	44	39.6	3.6-7.2-2x14.4	11	3.6-7.2-2x14.4	100	50	SLGA	22	50	-	-	
ICDAKF252050652	52	46.8	3.6-7.2-14.4-21.6	13	3.6-2x7.2-2x14.4	125	50	SLGA	24	50	-	-	
ICDAKF260050652	60	54	3.6-7.2-14.4-28.8	15	3.6-7.2-3x14.4	125	50	SLGA	26	50	-	-	
ICDAKF272050652	72	64.8	7.2-2x14.4-28.8	9	7.2-4x14.4	160	50	SLGA	28	50	-	-	
MINImatic													
IFDAKF280050652	80	75	7.5-15-22.5-30	10	7.5	250	9	SLGA	41	55	-	60	
IFDAKF311250652	112	105	7.5-15-22.5-30-30	14	30-75	250	9	SLGA	47	56	-	60	
IFDAKF313650652	136	125	7.5-15-22.5-30-52.5	17	52.5-75	315	9	SLGA	51	56	-	60	
IFDAKF316050652	160	150	15-30-45-60	10	2x75	315	9	SLGA	54	56	-	60	
IFDAKF319250652	192	180	15-30-60-75	12	30-2x75	400	9	SLGA	60	57	-	60	
IFDAKF321650652	216	200	15-30-60-90	13	52.5-2x75	500	9	SLGA	65	57	-	60	
IFDAKF324050652	240	225	15-30-60-120	15	3x75	500	9	SLGA	69	57	-	60	
MIDmatic													
ILDFKF327550884	275	255	15-2x30-3x60	17	105-150	630	25	BLGA	170	64	-	-	
ILDFKF332050884	320	300	2x30-4x60	10	2x150	800	30	BLGA	185	64	-	-	
ILDFKF340050884	400	375	2x38-4x75	10	75-2x150	800	30	BLGA	200	64	-	-	
ILDFKF348050884	480	450	2x45-4x90	10	3x150	1000	30	BLGA	220	64	-	-	
MULTImatic													
INDAKF332050700	320	300	2x30-4x60	10	2x150	800	50	BBGA	190	-	72	75	
INDAKF340050700	400	375	2x37.5-4x75	10	75-2x150	1250	50	BBGA	210	-	72	75	
INDAKF348050700	480	450	2x45-4x90	10	3x150	1250	50	BBGA	230	-	72	75	
INDAKF356050700	560	525	2x52.5-4x105	10	75-3x150	1250	50	BBGA	270	-	74	81	
INDAKF364050700	640	600	2x60-4x120	10	4x150	2x800	50	BBGA	420	-	92	83	
INDAKF372050700	720	675	2x67.5-4x135	10	75-4x150	2x1250	50	BBGA	500	-	92	83	
INDAKF380050700	800	750	2x75-4x150	10	5x150	2x1250	50	BBGA	520	-	92	83	
INDAKF388050700	880	825	2x82.5-4x165	10	75-5x150	2x1250	50	BBGA	550	-	92	83	
INDAKF396050700	960	900	2x90-4x180	10	6x150	2x1250	50	BBGA	580	-	92	83	
INDAKF404050700	1040	975	2x97.5-4x195	10	75-6x150	2x1250	50	BBGA	620	-	94	85	
INDAKF412050700	1120	1050	2x105-4x210	10	2x75-6x150	2x1250	50	BBGA	660	-	94	85	

1. MULTImatic of several columns have a disconnector and a cable entry for each column.

2. Other values upon request. For MICROmatic and MIDmatic series short-circuit withstand current conditioned by the upstream protective device.

3. For part numbers contact us.

Part numbers and detailed technical features, divided by family device size and cutting in kvar

26

# POWER FACTOR CORRECTION SOLUTIONS WITH HIGH GRADIENT METALLIZED POLYPROPYLENE CAPACITORS



Range	Fix PFC systems	Automatic PFC systems	Racks	Nominal voltage U <sub>e</sub>	Capacitors voltage U <sub>N</sub>	THDI <sub>R</sub> %	THDI <sub>C</sub> %	I <sub>250Hz</sub> %	THDVR%	f <sub>D</sub>
HP10	✓	✓	✓	400-415V	415V	≤12%	≤50%	–	–	–
HP20	✓	✓	✓	400-415V	460V	≤20%	≤70%	–	–	–
HP30	✓	✓	✓	400-415V	550V	≤27%	≤85%	–	–	–
FH20*	✓	✓	✓	400-415V	550V	100%	–	≤25%	≤6%	180Hz
FH30*		✓	✓	400-415V	550V	100%	–	>25%	≤6%	135Hz

\* Also available in the /S version thyristor switched.



## Used capacitor

# CRM25-1



### Generalities

- High gradient metallized polypropylene capacitors.
- Metallic case with protection degree IP00.
- Internal overpressure protection system.
- Resin filling.

### Technical characteristics

Rated operational voltage	Ue=415-460-550V
Rated frequency	50Hz
Max current overload I <sub>n</sub>	1,3 I <sub>n</sub> (continuous) 2 I <sub>n</sub> (x380s every 60 minutes) 3 I <sub>n</sub> (x150s every 60 minutes) 4 I <sub>n</sub> (x70s every 60 minutes) 5 I <sub>n</sub> (x45s every 60 minutes)
Max voltage overload V <sub>n</sub>	3xU <sub>N</sub> (for 1 minute)
Temperature class	-25/D
Life expectancy	100.000h
Capacitance tolerance	-5% ÷ +10%
Service	continuous
Construction type	high gradient polypropylene
Standards	IEC 60831-1/2

Part number	Rated voltage U <sub>N</sub> [V]	MAX voltage U <sub>MAX</sub> [V]	Power [kvar]	Capacitance [μF]	Dimensions d x h [mm]	Weight [kg]	Pcs/box
<b>HP10</b>							
6DCRM00069A50	415	455	0,69	12,2	60x90	0,25	36
6DCRM00138A50	415	455	1,38	25,4	60x90	0,25	36
6DCRM00275A50	415	455	2,75	50,8	60x140	0,5	36
6DCRM00550A50	415	455	5,5	101,6	60x140	0,5	36
<b>HP20</b>							
6DCRM00069B50	460	500	0,69	10,4	60x90	0,25	36
6DCRM00138B50	460	500	1,38	20,7	60x90	0,25	36
6DCRM00275B50	460	500	2,75	41,4	60x140	0,5	36
6DCRM00550B50	460	500	5,5	82,7	60x140	0,5	36
<b>HP30   FH20   FH30</b>							
6DCRM00069C50	550	600	0,69	7,2	60x90	0,25	36
6DCRM00138C50	550	600	1,38	14,5	60x90	0,25	36
6DCRM00275C50	550	600	2,75	28,9	60x140	0,5	36
6DCRM00550C50	550	600	5,5	57,9	60x140	0,5	36
<b>HP10 kit*</b>							
ICRM25069415	415	455	0,69	12,2	310x70x120	1	3
ICRM25138415	415	455	1,38	25,4	310x70x120	1	3
ICRM25275415	415	455	2,75	50,8	310x70x120	1,5	3
ICRM25550415	415	455	5,5	101,6	310x70x120	1,5	3
<b>HP20 kit*</b>							
ICRM25069460	460	500	0,69	10,4	310x70x120	1	3
ICRM25138460	460	500	1,38	20,7	310x70x120	1	3
ICRM25275460	460	500	2,75	41,4	310x70x120	1,5	3
ICRM25550460	460	500	5,5	82,7	310x70x120	1,5	3
<b>HP30 kit*</b>							
ICRM25275550	550	600	2,75	28,9	310x70x120	1,5	3
ICRM25550550	550	600	5,5	57,9	310x70x120	1,5	3

\* Kit consists of 3 capacitors, nuts and washers, discharge resistors.



## Fix PFC system MICROfix

U <sub>e</sub>	U <sub>N</sub>	U <sub>MAX</sub> *	f	THDI <sub>R</sub> %	THDI <sub>C</sub> %**
400-415V	415V	455V	50Hz	≤12%	≤50%

\* Maximum admissible value according to IEC 60831-1.

\*\* Attention: in this conditions of load network harmonic amplification phenomena is possible.

### Generalities

- Zink-passivated metallic enclosure painted with epossidic dust paint, colour RAL 7035.
- Load-break switch with door interlock.
- Fuses with high breaking power NH00-gG.
- FS17 450/750V self-extinguish cable according to EN 50525 - EN 50575 - EN 50575/A1.
- IP3X protection degree.
- CRM25 single phase self-healing metallized polypropylene capacitor with U<sub>N</sub>=415V rated voltage.
- Discharge resistance.
- Signal lamp power on.

### Technical characteristics

Rated operational voltage	U <sub>e</sub> =400-415V
Rated frequency	50Hz
Max current overload I <sub>n</sub> (bank)	1,3 I <sub>n</sub>
Max current overload I <sub>n</sub> (capacitors @40°C)	1,3 I <sub>n</sub> (continuous) 2 I <sub>n</sub> (x380s every 60 minutes) 3 I <sub>n</sub> (x150s every 60 minutes) 4 I <sub>n</sub> (x70s every 60 minutes) 5 I <sub>n</sub> (x45s every 60 minutes)
Max overload V <sub>n</sub> (bank)	1,1 x U <sub>e</sub>
Max overload V <sub>n</sub> (capacitors)	3 x U <sub>N</sub> (for 1 minute)
Insulation voltage	690V
Temperature class (bank)	-5/+40°C
Temperature class (capacitors)	-25/+55°C
Discharge device	mounted on each bank
Installation	indoor
Service	continuous
Internal connection	delta
Total losses	~ 2W/kvar
Inner surface finish	zinc passivation
Standards (bank)	IEC 61439-1/2, IEC 61921
Standards (capacitors)	IEC 60831-1/2

Part number	Power [kvar]		LBS	I <sub>cc</sub> <sup>1</sup>	Weight	Dimensions
	U <sub>e</sub> =415V	U <sub>e</sub> =400V	[A]	[kA]	[kg]	(see chap. 5)

#### MICROfix

IB3DKK211050987	<b>11</b>	<b>10</b>	40	50	9	43
IB3DKK216550987	<b>16,5</b>	<b>15</b>	40	50	12	43
IB3DKK222050987	<b>22</b>	<b>20</b>	80	50	13	43
IB3DKK233050987	<b>33</b>	<b>30</b>	80	50	15	43
IB3DKK243050987	<b>43</b>	<b>40</b>	125	50	18	44
IB3DKK254050987	<b>54</b>	<b>50</b>	125	50	20	44

1. Other values upon request. Short-circuit withstand current conditioned by the upstream protective device.



## Automatic PFC system

### MICROmatic | MINImatic | MIDImatic | MULTImatic

U <sub>e</sub>	U <sub>N</sub>	U <sub>MAX</sub> *	f	THDI <sub>R</sub> %	THDI <sub>C</sub> %**
400-415V	415V	455V	50Hz	≤12%	≤50%

\* Maximum admissible value according to IEC 60831-1.

\*\* Attention: in this conditions of load network harmonic amplification phenomena is possible.

## Generalities

- Zinc-passivated metallic enclosure painted with epossidic dust paint, colour RAL 7035.
- Auxiliary transformer to separate power and auxiliary circuit parts (110V).
- Load-break switch with door interlock.
- Special contactors with damping resistors to limit capacitors inrush current (AC6b).
- FS17 450/750V self-extinguish cable according to EN 50525 - EN 50575 - EN 50575/A1.
- Microprocessor Power Factor Correction relay.
- CRM25 single phase self-healing metallized polypropylene capacitor with U<sub>N</sub>=415V rated voltage.

## Technical characteristics

Rated operational voltage	U <sub>e</sub> =400-415V
Rated frequency	50Hz
Max current overload I <sub>n</sub> (bank)	1,3 I <sub>n</sub>
Max current overload I <sub>n</sub> (capacitors @40°C)	1,3 I <sub>n</sub> (continuous) 2 I <sub>n</sub> (x380s every 60 minutes) 3 I <sub>n</sub> (x150s every 60 minutes) 4 I <sub>n</sub> (x70s every 60 minutes) 5 I <sub>n</sub> (x45s every 60 minutes)
Max overload V <sub>n</sub> (bank)	1,1xU <sub>e</sub>
Max overload V <sub>n</sub> (capacitors)	3xU <sub>N</sub> (for 1 minute)
Insulation voltage	690V
Temperature class (bank)	-5/+40°C
Temperature class (capacitors)	-25/+55°C
Discharge device	mounted on each bank
Installation	indoor
Service	continuous
Internal connection	delta
Operation devices	capacitors contactors (AC6b)
Total losses	~ 2W/kvar
Inner surface finish	zinc passivation
Standards (bank)	IEC 61439-1/2, IEC 61921
Standards (capacitors)	IEC 60831-1/2

Part number	Power [kvar]		Steps U <sub>e</sub> =400V	Electrical steps number	Banks [kvar]	LBS <sup>1</sup> [A]	I <sub>cc</sub> <sup>2</sup> [kA]	PFC relay	Weight [kg]	Dimensions (see chap. 5)		
	U <sub>e</sub> =415V	U <sub>e</sub> =400V								IP3X	IP4X	IP55 <sup>3</sup>

### MICROmatic

IC0AKF214050652	<b>14</b>	<b>12,6</b>	1,8-3,6-7,2	7	1,8-3,6-7,2	63	50	5LGA	12	49	–	–
IC0AKF220050652	<b>20</b>	<b>18</b>	3,6-7,2-7,2	5	3,6-7,2-7,2	63	50	5LGA	13	49	–	–
IC0AKF228050652	<b>28</b>	<b>25,2</b>	3,6-7,2-14,4	7	3,6-7,2-14,4	80	50	5LGA	14	49	–	–
IC0AKF236050652	<b>36</b>	<b>32,4</b>	3,6-2x7,2-14,4	9	3,6-2x7,2-14,4	100	50	5LGA	18	50	–	–
IC0AKF244050652	<b>44</b>	<b>39,6</b>	3,6-7,2-2x14,4	11	3,6-7,2-2x14,4	100	50	5LGA	22	50	–	–
IC0AKF252050652	<b>52</b>	<b>46,8</b>	3,6-7,2-14,4-21,6	13	3,6-2x7,2-2x14,4	125	50	5LGA	24	50	–	–
IC0AKF260050652	<b>60</b>	<b>54</b>	3,6-7,2-14,4-28,8	15	3,6-7,2-3x14,4	125	50	5LGA	26	50	–	–
IC0AKF272050652	<b>72</b>	<b>64,8</b>	7,2-2x14,4-28,8	9	7,2-4x14,4	160	50	5LGA	28	50	–	–

### MINImatic

IF0AKF280050652	<b>80</b>	<b>75</b>	7,5-15-22,5-30	10	75	250	9	5LGA	41	55	–	60
IF0AKF311250652	<b>112</b>	<b>105</b>	7,5-15-22,5-2x30	14	30-75	250	9	5LGA	47	56	–	60
IF0AKF313650652	<b>136</b>	<b>125</b>	7,5-15-22,5-30-52,5	17	52,5-75	315	9	5LGA	51	56	–	60
IF0AKF316050652	<b>160</b>	<b>150</b>	15-30-45-60	10	2x75	315	9	5LGA	54	56	–	60
IF0AKF319250652	<b>192</b>	<b>180</b>	15-30-60-75	12	30-2x75	400	9	5LGA	60	57	–	60
IF0AKF321650652	<b>216</b>	<b>200</b>	15-30-60-90	13	52,5-2x75	500	9	5LGA	65	57	–	60
IF0AKF324050652	<b>240</b>	<b>225</b>	15-30-60-120	15	3x75	500	9	5LGA	69	57	–	60

### MIDImatic

IL0FKF327550884	<b>275</b>	<b>255</b>	15-2x30-3x60	17	105-150	630	25	8LGA	170	64	–	–
IL0FKF332050884	<b>320</b>	<b>300</b>	2x30-4x60	10	2x150	800	30	8LGA	185	64	–	–
IL0FKF340050884	<b>400</b>	<b>375</b>	2x38-4x75	10	75-2x150	800	30	8LGA	200	64	–	–
IL0FKF348050884	<b>480</b>	<b>450</b>	2x45-4x90	10	3x150	1000	30	8LGA	220	64	–	–

### MULTImatic

IN0AKF332050700	<b>320</b>	<b>300</b>	2x30-4x60	10	2x150	800	50	8BGA	190	–	72	75
IN0AKF340050700	<b>400</b>	<b>375</b>	2x37,5-4x75	10	75-2x150	1250	50	8BGA	210	–	72	75
IN0AKF348050700	<b>480</b>	<b>450</b>	2x45-4x90	10	3x150	1250	50	8BGA	230	–	72	75
IN0AKF356050700	<b>560</b>	<b>525</b>	2x52,5-4x105	10	75-3x150	1250	50	8BGA	270	–	74	81
IN0AKF364050700	<b>640</b>	<b>600</b>	2x60-4x120	10	4x150	2x800	50	8BGA	420	–	92	83
IN0AKF372050700	<b>720</b>	<b>675</b>	2x67,5-4x135	10	75-4x150	2x1250	50	8BGA	500	–	92	83
IN0AKF380050700	<b>800</b>	<b>750</b>	2x75-4x150	10	5x150	2x1250	50	8BGA	520	–	92	83
IN0AKF388050700	<b>880</b>	<b>825</b>	2x82,5-4x165	10	75-5x150	2x1250	50	8BGA	560	–	92	83
IN0AKF396050700	<b>960</b>	<b>900</b>	2x90-4x180	10	6x150	2x1250	50	8BGA	580	–	92	83
IN0AKF410450700	<b>1040</b>	<b>975</b>	2x97,5-4x195	10	75-6x150	2x1250	50	8BGA	620	–	94	85
IN0AKF411250700	<b>1120</b>	<b>1050</b>	2x105-4x210	10	2x75-6x150	2x1250	50	8BGA	660	–	94	85

1. MULTImatic of several columns have a disconnector and a cable entry for each column.

2. Other values upon request. For MICROmatic and MIDImatic series short-circuit withstand current conditioned by the upstream protective device.

3. For part numbers contact us.





## Racks MINIrack | MULTIrack

U <sub>e</sub>	U <sub>N</sub>	U <sub>MAX</sub> *	f	THDI <sub>R</sub> %	THDI <sub>C</sub> %**
400-415V	415V	455V	50Hz	≤12%	≤50%

\* Maximum admissible value according to IEC 60831-1.

\*\* Attention: in this conditions of load network harmonic amplification phenomena is possible.

### Generalities

- Special contactors with damping resistors to limit capacitors inrush current (AC6b).
- FS17 450/750V self-extinguish cable according to EN 50525 - EN 50575 - EN 50575/A1.
- Fuses with high breaking power NH00-gG.
- CRM25 single phase self-healing metallized polypropylene capacitor with U<sub>N</sub>=415V rated voltage.
- Discharge devices.

Racks can be used as spare parts in ICAR power factor correction systems properly maintained and in suitably ventilated / conditioned third-party electrical panels (max internal temperature 55°C).  
MULTI-rack can also be used on MIDImatic systems from the production date 1st of June, 2016.

### Technical characteristics

Rated operational voltage	U <sub>e</sub> =400-415V
Rated frequency	50Hz
Max current overload I <sub>n</sub> (bank)	1,3 I <sub>n</sub>
Max current overload I <sub>n</sub> (capacitors @40°C)	1,3 I <sub>n</sub> (continuous) 2 I <sub>n</sub> (x380s every 60 minutes) 3 I <sub>n</sub> (x150s every 60 minutes) 4 I <sub>n</sub> (x70s every 60 minutes) 5 I <sub>n</sub> (x45s every 60 minutes)
Max overload V <sub>n</sub> (bank)	1,1 x U <sub>e</sub>
Max overload V <sub>n</sub> (capacitors)	3 x U <sub>N</sub> (for 1 minute)
Insulation voltage	690V
Temperature class (bank)	-5/+40°C
Temperature class (capacitors)	-25/+55°C
Discharge device	mounted on each bank
Installation	indoor
Service	continuous
Internal connection	delta
Total losses	~ 2W/kvar
Inner surface finish	zinc passivation
Standards (bank)	IEC 61439-1/2, IEC 61921
Standards (capacitors)	IEC 60831-1/2

Part number	Power [kvar]		Steps U <sub>e</sub> =400V	Weight	Dimensions
	U <sub>e</sub> =415V	U <sub>e</sub> =400V	[A]	[kg]	(see chap. 5)

#### MINIrack

IW0AKK216050000	<b>16</b>	<b>15</b>	15	4	110
IW0AKK232050000	<b>32</b>	<b>30</b>	30	6	110
IW0AKK256050000	<b>56</b>	<b>52,5</b>	22.5-30	11	110
IW0AKK280050268	<b>80</b>	<b>75</b>	15-30-30	13	110
IW0AKK280050000	<b>80</b>	<b>75</b>	7.5-15-22.5-30	14	110

#### MULTIrack

IX0AKK280050000	<b>80</b>	<b>75</b>	2x7.5-4x15	19	120
IX0AKK316050000	<b>160</b>	<b>150</b>	2x15-4x30	27	120



HP20

Fix PFC system  
MICROfix

U <sub>e</sub>	U <sub>N</sub>	U <sub>MAX</sub> *	f	THD <sub>IR</sub> %	THD <sub>IC</sub> %**
400-415V	460V	500V	50Hz	≤20%	≤70%

\* Maximum admissible value according to IEC 60831-1.

\*\* Attention: in this conditions of load network harmonic amplification phenomena is possible.

## Generalities

- Zink-passivated metallic enclosure painted with epossidic dust paint, colour RAL 7035.
- Load-break switch with door interlock.
- Fuses with high breaking power NH00-gG.
- FS17 450/750V self-extinguish cable according to EN 50525 - EN 50575 - EN 50575/A1.
- IP3X protection degree.
- CRM25 single phase self-healing metallized polypropylene capacitor with U<sub>N</sub>=460V rated voltage.
- Discharge resistance.
- Signal lamp power on

## Technical characteristics

Rated operational voltage	U <sub>e</sub> =400-415V
Rated frequency	50Hz
Max current overload I <sub>n</sub> (bank)	1,3 I <sub>n</sub>
Max current overload I <sub>n</sub> (capacitors @40°C)	1,3 I <sub>n</sub> (continuous) 2 I <sub>n</sub> (x380s every 60 minutes) 3 I <sub>n</sub> (x150s every 60 minutes) 4 I <sub>n</sub> (x70s every 60 minutes) 5 I <sub>n</sub> (x45s every 60 minutes)
Max overload V <sub>n</sub> (bank)	1,1xU <sub>e</sub>
Max overload V <sub>n</sub> (capacitors)	3xU <sub>N</sub> (for 1 minute)
Insulation voltage	690V
Temperature class (bank)	-5/+40°C
Temperature class (capacitors)	-25/+55°C
Discharge device	mounted on each bank
Installation	indoor
Service	continuous
Internal connection	delta
Total losses	~ 2W/kvar
Inner surface finish	zinc passivation
Standards (bank)	IEC 61439-1/2, IEC 61921
Standards (capacitors)	IEC 60831-1/2

Part number	Power [kvar]			LBS	I <sub>cc</sub> <sup>1</sup>	Weight	Dimensions
	U <sub>N</sub> =460V	U <sub>e</sub> =415V	U <sub>e</sub> =400V	[A]	[kA]	[kg]	(see chap. 5)

### MICROfix

IB3NLK170050987	<b>7</b>	<b>6</b>	<b>5</b>	40	50	8	43
IB3NLK214050987	<b>14</b>	<b>11</b>	<b>10</b>	40	50	9	43
IB3NLK219050987	<b>19</b>	<b>16</b>	<b>15</b>	40	50	12	43
IB3NLK227050987	<b>27</b>	<b>22</b>	<b>20</b>	80	50	13	43
IB3NLK241050987	<b>41</b>	<b>33</b>	<b>30</b>	80	50	15	44
IB3NLK254050987	<b>54</b>	<b>44</b>	<b>40</b>	125	50	18	44
IB3NLK266050987	<b>66</b>	<b>54</b>	<b>50</b>	125	50	20	44

1. Other values upon request. Short-circuit withstand current conditioned by the upstream protective device.



## Automatic PFC system MICROmatic | MINImatic | MIDImatic | MULTImatic

U <sub>e</sub>	U <sub>N</sub>	U <sub>MAX</sub> *	f	THD <sub>IR</sub> %	THD <sub>IC</sub> %**
400-415V	460V	500V	50Hz	≤20%	≤70%

\* Maximum admissible value according to IEC 60831-1.

\*\* Attention: in this conditions of load network harmonic amplification phenomena is possible.

### Generalities

- Zink-passivated metallic enclosure painted with epossidic dust paint, colour RAL 7035.
- Auxiliary transformer to separate power and auxiliary circuit parts (110V).
- Load-break switch with door interlock.
- Special contactors with damping resistors to limit capacitors inrush current (AC6b).
- FS17 450/750V self-extinguish cable according to EN 50525 - EN 50575 - EN 50575/A1.
- Microprocessor Power Factor Correction relay.
- CRM25 single phase self-healing metallized polypropylene capacitor with U<sub>N</sub>=460V rated voltage.

### Technical characteristics

Rated operational voltage	U <sub>e</sub> =400-415V
Rated frequency	50Hz
Max current overload I <sub>n</sub> (bank)	1,3 I <sub>n</sub>
Max current overload I <sub>n</sub> (capacitors @40°C)	1,3 I <sub>n</sub> (continuous) 2 I <sub>n</sub> (x380s every 60 minutes) 3 I <sub>n</sub> (x150s every 60 minutes) 4 I <sub>n</sub> (x70s every 60 minutes) 5 I <sub>n</sub> (x45s every 60 minutes)
Max overload V <sub>n</sub> (bank)	1,1xU <sub>e</sub>
Max overload V <sub>n</sub> (capacitors)	3xU <sub>N</sub> (for 1 minute)
Insulation voltage	690V
Temperature class (bank)	-5/+40°C
Temperature class (capacitors)	-25/+55°C
Discharge device	mounted on each bank
Installation	indoor
Service	continuous
Internal connection	delta
Operation devices	capacitors contactors (AC6b)
Total losses	~ 2W/kvar
Inner surface finish	zinc passivation
Standards (bank)	IEC 61439-1/2, IEC 61921
Standards (capacitors)	IEC 60831-1/2

Part number	Power [kvar]			Steps U <sub>e</sub> =400V	Electrical steps number	Banks	LBS <sup>1</sup>	I <sub>cc</sub> <sup>2</sup>	PFC relay	Weight	Dimensions (see chap. 5)		
	U <sub>N</sub> =460V	U <sub>e</sub> =415V	U <sub>e</sub> =400V			[kvar]	[A]	[kA]		[kg]	IP3X	IP4X	IP55 <sup>3</sup>

#### MICROmatic

IC0JLF214050652	14	11	10,5	1,5-3-6	7	1,5-3-6	63	50	5LGA	12	49	–	–
IC0JLF222050652	22	18	16,5	1,5-3-2x6	11	1,5-3-2x6	80	50	5LGA	16	50	–	–
IC0JLF230050652	30	24	22,5	1,5-3-6-12	15	1,5-3-6-12	80	50	5LGA	17	50	–	–
IC0JLF238050652	38	31	28,5	1,5-3-2x6-12	19	1,5-3-2x6-12	80	50	5LGA	20	50	–	–
IC0JLF244050652	44	36	33	3-6-2x12	11	3-6-2x12	100	50	5LGA	22	50	–	–
IC0JLF252050652	52	42	39	3-6-12-18	13	3-2x6-2x12	100	50	5LGA	24	50	–	–
IC0JLF260050652	60	49	45	3-6-12-24	15	3-6-3x12	100	50	5LGA	26	50	–	–
IC0JLF272050652	72	58	54	6-2x12-24	9	6-4x12	125	50	5LGA	29	50	–	–

#### MINImatic

IF0JLF280050652	80	65	60	6-12-18-24	10	60	250	9	5LGA	41	55	–	60
IF0JLF311250652	112	91	84	6-12-18-2x24	14	24-60	250	9	5LGA	47	56	–	60
IF0JLF313650652	136	110	102	6-12-18-24-42	17	42-60	250	9	5LGA	51	56	–	60
IF0JLF316050652	160	130	120	12-24-36-48	10	2x60	315	9	5LGA	54	56	–	60
IF0JLF319250652	192	155	144	12-24-48-60	12	24-2x60	315	9	5LGA	60	57	–	60
IF0JLF321650652	216	168	156	12-24-48-72	13	42-2x60	400	9	5LGA	65	57	–	60
IF0JLF324050652	240	194	180	12-24-48-96	15	3x60	400	9	5LGA	69	57	–	60
IF0JLF327250652	272	220	204	24-2x48-84	8	24-3x60	500	9	5LGA	74	58	–	61

#### MIDImatic

IL0ULF332050884	320	259	240	2x24-4x48	10	2x120	630	25	8LGA	230	64	–	–
IL0ULF340050884	400	324	300	2x30-4x60	10	60-2x120	800	30	8LGA	250	64	–	–
IL0ULF348050884	480	389	360	2x36-4x72	10	3x120	800	30	8LGA	280	64	–	–

#### MULTImatic

IN0NLF332050700	320	259	240	2x24-4x48	10	2x120	630	25	8BGA	252	–	72	75
IN0NLF340050700	400	324	300	2x30-4x60	10	60-2x120	800	50	8BGA	274	–	72	75
IN0NLF348050700	480	389	360	2x36-4x72	10	3x120	800	50	8BGA	300	–	72	75
IN0NLF356050700	560	454	420	2x42-4x84	10	60-3x120	1250	50	8BGA	320	–	74	81
IN0NLF36050700	640	518	480	2x48-4x96	10	4x120	1250	50	8BGA	340	–	74	81
IN0NLF372050700	720	583	540	2x54-4x108	10	60-4x120	1250	50	8BGA	526	–	70	73
IN0NLF380050700	800	648	600	2x60-4x120	10	5x120	2x800	50	8BGA	552	–	92	83
IN0NLF388050700	880	713	660	2x66-4x132	10	60-5x120	2x800	50	8BGA	574	–	92	83
IN0NLF396050700	960	778	720	2x72-4x144	10	6x120	2x800	50	8BGA	600	–	92	83
IN0NLF410450700	1040	842	780	2x78-4x156	10	60-6x120	2x1250	50	8BGA	620	–	94	85
IN0NLF411250700	1120	907	840	2x84-4x168	10	7x120	2x1250	50	8BGA	640	–	94	85
IN0NLF412050700	1200	972	900	2x90-4x180	10	60-7x120	2x1250	50	8BGA	670	–	94	85
IN0NLF412850700	1280	1037	960	2x96-4x192	10	8x120	2x1250	50	8BGA	690	–	94	85
IN0NLF413650700	1360	1102	1020	2x102-4x204	10	60-8x120	2x1250	50	8BGA	710	–	90	93
IN0NLF414450700	1440	1166	1080	2x108-4x216	10	2x60-8x120	2x1250	50	8BGA	730	–	90	93

1. MULTImatic of several columns have a disconnector and a cable entry for each column.

2. Other values upon request. For MICROmatic and MIDImatic series short-circuit withstand current conditioned by the upstream protective device.

3. For part numbers contact us.

# HP20 Racks MINIrack | MULTIrack

U <sub>e</sub>	U <sub>N</sub>	U <sub>MAX</sub> *	f	THDI <sub>R</sub> %	THDI <sub>C</sub> %**
400-415V	460V	500V	50Hz	≤20%	≤70%

\* Maximum admissible value according to IEC 60831-1.

\*\* Attention: in this conditions of load network harmonic amplification phenomena is possible.

## Generalities

- Special contactors with damping resistors to limit capacitors inrush current (AC6b).
- FS17 450/750V self-extinguish cable according to EN 50525 - EN 50575 - EN 50575/A1.
- Fuses with high breaking power NH00-gG.
- CRM25 single phase self-healing metallized polypropylene capacitor with U<sub>N</sub>=460V rated voltage.
- Discharge devices.

Racks can be used as spare parts in ICAR power factor correction systems properly maintained and in suitably ventilated / conditioned third-party electrical panels (max internal temperature 55°C).

MULTI-rack can also be used on MIDImatic systems from the production date 1st of June, 2016.

## Technical characteristics

Rated operational voltage	U <sub>e</sub> =400-415V
Rated frequency	50Hz
Max current overload I <sub>n</sub> (bank)	1,3 I <sub>n</sub>
Max current overload I <sub>n</sub> (capacitors @40°C)	1,3 I <sub>n</sub> (continuous) 2 I <sub>n</sub> (x380s every 60 minutes) 3 I <sub>n</sub> (x150s every 60 minutes) 4 I <sub>n</sub> (x70s every 60 minutes) 5 I <sub>n</sub> (x45s every 60 minutes)
Max overload V <sub>n</sub> (bank)	1,1xU <sub>e</sub>
Max overload V <sub>n</sub> (capacitors)	3xU <sub>N</sub> (for 1 minute)
Insulation voltage	690V
Temperature class (bank)	-5/+40°C
Temperature class (capacitors)	-25/+55°C
Discharge device	mounted on each bank
Installation	indoor
Service	continuous
Internal connection	delta
Total losses	~ 2W/kvar
Inner surface finish	zinc passivation
Standards (bank)	IEC 61439-1/2, IEC 61921
Standards (capacitors)	IEC 60831-1/2

Part number	Power [kvar]			Steps U <sub>e</sub> =400V	Weight	Dimensions
	U <sub>N</sub> =460V	U <sub>e</sub> =415V	U <sub>e</sub> =400V	[A]	[kg]	(see chap. 5)

### MINIrack

IWOJLK216050000	<b>16</b>	<b>13</b>	<b>12</b>	12	4	110
IWOJLK232050000	<b>32</b>	<b>26</b>	<b>24</b>	24	6	110
IWOJLK256050000	<b>56</b>	<b>45</b>	<b>42</b>	18-24	11	110
IWOJLK280050268	<b>80</b>	<b>65</b>	<b>60</b>	6-12-18-24	13	110
IWOJLK280050000	<b>80</b>	<b>65</b>	<b>60</b>	12-2x24	14	110

### MULTIrack

IXONLK280050000	<b>80</b>	<b>65</b>	<b>60</b>	2x6-4x12	19	120
IXONLK316050000	<b>160</b>	<b>129</b>	<b>120</b>	2x12-4x24	27	120



# HP30

## Fix PFC system SUPERriphaso

U <sub>e</sub>	U <sub>N</sub>	U <sub>MAX</sub> *	f	THD <sub>IR</sub> %	THD <sub>IC</sub> %**
400-415V	550V	600V	50Hz	≤27%	≤85%

\* Maximum admissible value according to IEC 60831-1.

\*\* Attention: in this conditions of load network harmonic amplification phenomena is possible.

### Generalities

- Self-extinguishing plastic enclosure painted with epossidic dust paint, colour RAL7030.
- IP40 protection degree.
- CRM25 single phase self-healing metallized polypropylene capacitor with U<sub>N</sub>=550V rated voltage.
- Discharge resistance.

SUPERriphaso HP30 modules can be combined, with the mechanical and electrical connection elements supplied, to make monoblocks of up to 5 units (50kvar to 415V).

### Technical characteristics

Rated operational voltage	U <sub>e</sub> =400-415V
Rated frequency	50Hz
Max current overload I <sub>n</sub> (capacitors @40°C)	1,3 I <sub>n</sub> (continuous) 2 I <sub>n</sub> (x380s every 60 minutes) 3 I <sub>n</sub> (x150s every 60 minutes) 4 I <sub>n</sub> (x70s every 60 minutes) 5 I <sub>n</sub> (x45s every 60 minutes)
Max overload V <sub>n</sub>	3xU <sub>N</sub> (for 1 minute)
Insulation voltage	3/8kV - U <sub>e</sub> ≤ 660V
Temperature class	-25/+55°C
Discharge device	mounted on each bank
Installation	indoor
Service	continuous
Internal connection	delta
Total losses	~ 0,4W/kvar
Standards	IEC 60831-1/2

Part number	Power [kvar]			Modules	Weight	Dimensions
	U <sub>N</sub> =550V	U <sub>e</sub> =415V	U <sub>e</sub> =400V	[Nr.]	[kg]	(see chap. 5)

#### SUPERriphaso

IA3DRK182550001	<b>8,25</b>	<b>5</b>	<b>4.4</b>	1	1.7	21
IA3DRK216550001	<b>16,5</b>	<b>10</b>	<b>8.8</b>	1	2.1	21



HP30

Automatic PFC system  
MINImatic | MULTImatic

U <sub>e</sub>	U <sub>N</sub>	U <sub>MAX</sub> *	f	THDI <sub>R</sub> %	THDI <sub>C</sub> %**
400-415V	550V	600V	50Hz	≤27%	≤85%

\* Maximum admissible value according to IEC 60831-1.

\*\* Attention: in this conditions of load network harmonic amplification phenomena is possible.

## Generalities

- Zinc-passivated metallic enclosure painted with epossidic dust paint, colour RAL 7035.
- Auxiliary transformer to separate power and auxiliary circuit parts (110V).
- Load-break switch with door interlock.
- Special contactors with damping resistors to limit capacitors inrush current (AC6b).
- FS17 450/750V self-extinguish cable according to EN 50525 - EN 50575 - EN 50575/A1.
- Microprocessor Power Factor Correction relay.
- • CRM25 single phase self-healing metallized polypropylene capacitor with U<sub>N</sub>=550V rated voltage.

## Technical characteristics

Rated operational voltage	U <sub>e</sub> =400-415V
Rated frequency	50Hz
Max current overload I <sub>n</sub> (bank)	1,3 I <sub>n</sub>
Max current overload I <sub>n</sub> (capacitors @40°C)	1,3 I <sub>n</sub> (continuous) 2 I <sub>n</sub> (x380s every 60 minutes) 3 I <sub>n</sub> (x150s every 60 minutes) 4 I <sub>n</sub> (x70s every 60 minutes) 5 I <sub>n</sub> (x45s every 60 minutes)
Max overload V <sub>n</sub> (bank)	1,1xU <sub>e</sub>
Max overload V <sub>n</sub> (capacitors)	3xU <sub>N</sub> (for 1 minute)
Insulation voltage	690V
Temperature class (bank)	-5/+40°C
Temperature class (capacitors)	-25/+55°C
Discharge device	mounted on each bank
Installation	indoor
Service	continuous
Internal connection	delta
Operation devices	capacitors contactors (AC6b)
Total losses	~ 2W/kvar
Inner surface finish	zinc passivation
Standards (bank)	IEC 61439-1/2, IEC 61921
Standards (capacitors)	IEC 60831-1/2

Part number	Power [kvar]			Steps U <sub>e</sub> =400V	Electrical steps number	Banks	LBS <sup>1</sup>	I <sub>cc</sub> <sup>2</sup>	PFC relay	Weight	Dimensions (see chap. 5)		
	U <sub>N</sub> =460V	U <sub>e</sub> =415V	U <sub>e</sub> =400V			[kvar]	[A]	[kA]		[kg]	IP3X	IP4X	IP55 <sup>3</sup>

### MINImatic

IF0TRF280050652	<b>80</b>	<b>49</b>	<b>45</b>	4,5-9-13,5-18	10	45	125	9	5LGA	41	55	—	60
IF0TRF311250652	<b>112</b>	<b>68</b>	<b>63</b>	4,5-9-13,5-2x18	14	18-45	125	9	5LGA	47	56	—	60
IF0TRF313650652	<b>136</b>	<b>82</b>	<b>76</b>	4,5-9-13,5-18-31,5	17	32-45	250	9	5LGA	51	56	—	60
IF0TRF316050652	<b>160</b>	<b>97</b>	<b>90</b>	9-18-27-36	10	2x45	250	9	5LGA	54	56	—	60
IF0TRF319250652	<b>192</b>	<b>117</b>	<b>108</b>	9-18-36-45	12	18-2x45	250	9	5LGA	60	57	—	60
IF0TRF321650652	<b>216</b>	<b>126</b>	<b>117</b>	9-18-36-54	13	32-2x45	315	9	5LGA	65	57	—	60
IF0TRF324050652	<b>240</b>	<b>146</b>	<b>135</b>	9-18-36-72	15	3x45	315	9	5LGA	69	57	—	60
IF0TRF327250652	<b>272</b>	<b>165</b>	<b>153</b>	18-2x36-63	8	18-3x45	400	9	5LGA	78	58	—	61
IF0TRF332050652	<b>320</b>	<b>194</b>	<b>180</b>	18-36-54-72	10	4x45	400	9	5LGA	88	58	—	61

### MULTImatic

IN2DRF332050700	<b>320</b>	<b>194</b>	<b>180</b>	2x18-4x36	10	2x90	400	25	8BGA	252	—	72	75
IN2DRF340050700	<b>400</b>	<b>243</b>	<b>225</b>	2x22,5-4x45	10	45-2x90	630	25	8BGA	274	—	72	75
IN2DRF348050700	<b>480</b>	<b>292</b>	<b>270</b>	2x27-4x54	10	3x90	630	25	8BGA	300	—	72	75
IN2DRF356050700	<b>560</b>	<b>340</b>	<b>315</b>	2x31,5-4x63	10	45-3x90	800	50	8BGA	320	—	74	81
IN2DRF364050700	<b>640</b>	<b>389</b>	<b>360</b>	2x36-4x72	10	4x90	800	50	8BGA	340	—	74	81
IN2DRF372050700	<b>720</b>	<b>437</b>	<b>405</b>	2x40,5-4x81	10	45-4x90	1250	50	8BGA	526	—	70	73
IN2DRF380050700	<b>800</b>	<b>486</b>	<b>450</b>	2x45-4x90	10	5x90	1250	50	8BGA	552	—	70	73
IN2DRF388050700	<b>880</b>	<b>535</b>	<b>495</b>	2x49,5-4x99	10	45-5x90	1250	50	8BGA	574	—	71	78
IN2DRF396050700	<b>960</b>	<b>583</b>	<b>540</b>	2x54-4x108	10	6x90	1250	50	8BGA	600	—	71	78
IN2DRF410450700	<b>1040</b>	<b>632</b>	<b>585</b>	2x58,5-4x117	10	45-6x90	2x800	50	8BGA	620	—	94	85
IN2DRF411250700	<b>1120</b>	<b>680</b>	<b>630</b>	2x63-4x126	10	7x90	2x800	50	8BGA	640	—	94	85
IN2DRF412050700	<b>1200</b>	<b>729</b>	<b>675</b>	2x67,5-4x135	10	45-7x90	2x800	50	8BGA	660	—	94	85
IN2DRF412850700	<b>1280</b>	<b>778</b>	<b>720</b>	2x72-4x144	10	8x90	2x800	50	8BGA	680	—	94	85
IN2DRF413650700	<b>1360</b>	<b>826</b>	<b>765</b>	2x76,5-4x153	10	45-8x90	2x1250	50	8BGA	705	—	90	93
IN2DRF414450700	<b>1440</b>	<b>875</b>	<b>810</b>	2x81-4x162	10	9x90	2x1250	50	8BGA	730	—	90	93
IN2DRF415250700	<b>1520</b>	<b>923</b>	<b>855</b>	2x85,5-4x171	10	45-9x90	2x1250	50	8BGA	755	—	90	93
IN2DRF416050700	<b>1600</b>	<b>972</b>	<b>900</b>	2x90-4x180	10	10x90	2x1250	50	8BGA	780	—	90	93
IN2DRF416850700	<b>1680</b>	<b>1021</b>	<b>945</b>	2x94,5-4x189	10	45-10x90	2x1250	50	8BGA	805	—	91	98
IN2DRF417650700	<b>1760</b>	<b>1069</b>	<b>990</b>	2x99-4x198	10	11x90	2x1250	50	8BGA	830	—	91	98
IN2DRF418450700	<b>1840</b>	<b>1118</b>	<b>1035</b>	2x103,5-4x207	10	45-11x90	2x1250	50	8BGA	855	—	91	98
IN2DRF419250700	<b>1920</b>	<b>1166</b>	<b>1080</b>	2x108-4x216	10	12x90	2x1250	50	8BGA	880	—	91	98

1. MULTImatic of several columns have a disconnector and a cable entry for each column.

2. Other values upon request.

3. For part numbers contact us.

# HP30 Racks MINIrack | MULTIrack

U <sub>e</sub>	U <sub>N</sub>	U <sub>MAX</sub> *	f	THDI <sub>R</sub> %	THDI <sub>C</sub> %**
400-415V	550V	600V	50Hz	≤27%	≤85%

Maximum admissible value according to IEC 60831-1.

\*\* Attention: in this conditions of load network harmonic amplification phenomena is possible.

## Generalities

- Special contactors with damping resistors to limit capacitors inrush current (AC6b).
- FS17 450/750V self-extinguish cable according to EN 50525 - EN 50575 - EN 50575/A1.
- Fuses with high breaking power NH00-gG.
- CRM25 single phase self-healing metallized polypropylene capacitor with U<sub>N</sub>=550V rated voltage.
- Discharge devices.

Racks can be used as spare parts in ICAR power factor correction systems properly maintained and in suitably ventilated / conditioned third-party electrical panels (max internal temperature 55°C).

## Technical characteristics

Rated operational voltage	U <sub>e</sub> =400-415V
Rated frequency	50Hz
Max current overload I <sub>n</sub> (bank)	1,3 I <sub>n</sub>
Max current overload I <sub>n</sub> (capacitors @40°C)	1,3 I <sub>n</sub> (continuous) 2 I <sub>n</sub> (x380s every 60 minutes) 3 I <sub>n</sub> (x150s every 60 minutes) 4 I <sub>n</sub> (x70s every 60 minutes) 5 I <sub>n</sub> (x45s every 60 minutes)
Max overload V <sub>n</sub> (bank)	1,1 x U <sub>e</sub>
Max overload V <sub>n</sub> (capacitors)	3 x U <sub>N</sub> (for 1 minute)
Insulation voltage	690V
Temperature class (bank)	-5/+40°C
Temperature class (capacitors)	-25/+55°C
Discharge device	mounted on each bank
Installation	indoor
Service	continuous
Internal connection	delta
Total losses	~ 2W/kvar
Inner surface finish	zinc passivation
Standards (bank)	IEC 61439-1/2, IEC 61921
Standards (capacitors)	IEC 60831-1/2

Part number	Power [kvar]			Steps U <sub>e</sub> =400V	Weight	Dimensions
	U <sub>N</sub> =460V	U <sub>e</sub> =415V	U <sub>e</sub> =400V	[A]	[kg]	(see chap. 5)

### MINIrack

IW0SRK216050000	<b>16</b>	<b>9,5</b>	<b>9</b>	9	4	110
IW0SRK232050000	<b>32</b>	<b>19</b>	<b>18</b>	18	6	110
IW0SRK256050000	<b>56</b>	<b>34</b>	<b>32</b>	14-18	11	110
IW0SRK280050268	<b>80</b>	<b>47</b>	<b>45</b>	9-2x18	13	110
IW0SRK280050000	<b>80</b>	<b>47</b>	<b>45</b>	4.5-9-14-18	14	110

### MULTIrack

IX2DRK280050000	<b>80</b>	<b>47</b>	<b>45</b>	2x4.5-4x9	19	120
IX2DRK316050000	<b>160</b>	<b>95</b>	<b>90</b>	2x9-4x18	27	120

# FH20

## Detuned fix PFC system MICROfix

U <sub>e</sub>	U <sub>N</sub>	U <sub>MAX</sub> *	f	THDIR%	I <sub>250HZ</sub> %**	THDVR%	f <sub>D</sub>
400-415V	550V	600V	50Hz	100%	≤25%	≤6%	180Hz

\* Maximum admissible value according to IEC 60831-1.

\*\* Percent current of 5th harmonic.

## Generalities

- Zinc-passivated metallic enclosure painted with epossidic dust paint, colour RAL 7035.
- Load-break switch with door interlock.
- Fuses with high breaking power NH00-gG.
- FS17 450/750V self-extinguish cable according to EN 50525 - EN 50575 - EN 50575/A1.
- IP3X protection degree.
- CRM25 single phase self-healing metallized polypropylene capacitor with U<sub>N</sub>=550V rated voltage.
- Discharge resistance.
- Signal lamps on.
- Three phase detuning choke with tuning frequency
- f<sub>D</sub>=180Hz (N=3.6-p%=7.7%).

## Technical characteristics

Rated operational voltage	U <sub>e</sub> =400-415V
Rated frequency	50Hz
Max current overload I <sub>n</sub> (bank)	1,3 I <sub>n</sub>
Max current overload I <sub>n</sub> (capacitors @40°C)	1,3 I <sub>n</sub> (continuous) 2 I <sub>n</sub> (x380s every 60 minutes) 3 I <sub>n</sub> (x150s every 60 minutes) 4 I <sub>n</sub> (x70s every 60 minutes) 5 I <sub>n</sub> (x45s every 60 minutes)
Max overload V <sub>n</sub> (bank)	1,1 x U <sub>e</sub>
Max overload V <sub>n</sub> (capacitors)	3 x U <sub>N</sub> (for 1 minute)
Insulation voltage	690V
Temperature class (bank)	-5/+40°C
Temperature class (capacitors)	-25/+55°C
Discharge device	mounted on each bank
Installation	indoor
Service	continuous
Internal connection	delta
Total losses	~ 6W/kvar
Inner surface finish	zinc passivation
Standards (bank)	IEC 61439-1/2, IEC 61921
Standards (capacitors)	IEC 60831-1/2

Part number	Power [kvar]		LBS	I <sub>cc</sub> <sup>1</sup>	Weight	Dimensions
	U <sub>e</sub> =415V	U <sub>e</sub> =400V	[A]	[kA]	[kg]	(see chap. 5)

### MICROfix

IB4FFK212550988	<b>13.5</b>	<b>12,5</b>	40	50	30	45
IB4FFK225050988	<b>27</b>	<b>25</b>	80	50	36	45
IB4FFK250050988	<b>54</b>	<b>50</b>	125	50	41	45
IB4FFK275050988	<b>81</b>	<b>75</b>	250	50	54	45

1. Other values upon request. Short-circuit withstand current conditioned by the upstream protective device.





## Detuned automatic PFC system MINImatic | MIDImatic | MULTImatic

U <sub>e</sub>	U <sub>N</sub>	U <sub>MAX</sub> *	f	THDIR%	I <sub>250Hz</sub> %**	THDVR%	f <sub>D</sub>
400-415V	550V	600V	50Hz	100%	≤25%	≤6%	180Hz

\* Maximum admissible value according to IEC 60831-1.

\*\* Percent current of 5th harmonic.

### Generalities

- Zink-passivated metallic enclosure painted with epossidic dust paint, colour RAL 7035.
- Auxiliary transformer to separate power and auxiliary circuit parts (110V).
- Load-break switch with door interlock.
- Contactors for capacitive loads.
- FS17 450/750V self-extinguish cable according to EN 50525 - EN 50575 - EN 50575/A1.
- Microprocessor Power Factor Correction relay.
- Control and protection multimeter MCP5, integrated in 8BGA controller (MIDImatic and MULTImatic version).
- CRM25 single phase self-healing metallized polypropylene capacitor with U<sub>N</sub>=550V rated voltage.
- Three phase detuning choke with tuning frequency f<sub>D</sub>=180Hz (N=3.6-p%=7.7%).

The MULTImatic version is also available in the /S version thyristor switched for fast changing loads and / or where high noise is required.

### Technical characteristics

Rated operational voltage	U <sub>e</sub> =400-415V
Rated frequency	50Hz
Max current overload I <sub>n</sub> (bank)	1,3 I <sub>n</sub>
Max current overload I <sub>n</sub> (capacitors @40°C)	1,3 I <sub>n</sub> (continuous) 2 I <sub>n</sub> (x380s every 60 minutes) 3 I <sub>n</sub> (x150s every 60 minutes) 4 I <sub>n</sub> (x70s every 60 minutes) 5 I <sub>n</sub> (x45s every 60 minutes)
Max overload V <sub>n</sub> (bank)	1,1xU <sub>e</sub>
Max overload V <sub>n</sub> (capacitors)	3xU <sub>N</sub> (for 1 minute)
Insulation voltage	690V
Temperature class (bank)	-5/+40°C
Temperature class (capacitors)	-25/+55°C
Discharge device	mounted on each bank
Installation	indoor
Service	continuous
Internal connection	delta
Total losses	~ 6W/kvar
Inner surface finish	zinc passivation
Standards (bank)	IEC 61439-1/2, IEC 61921
Standards (capacitors)	IEC 60831-1/2

Part number	Power [kvar]		Steps U <sub>e</sub> =400V	Electrical steps number	Banks [kvar]	LBS <sup>1</sup> [A]	I <sub>cc</sub> <sup>2</sup> [kA]	PFC relay	Weight [kg]	Dimensions (see chap. 5)		
	U <sub>e</sub> =415V	U <sub>e</sub> =400V								IP3X	IP4X	IP55 <sup>3</sup>

#### MINImatic

IF7AFF210050662	<b>11</b>	<b>10</b>	2x2.5-5	4	2x5	125	9	5LGA	41	56	–	60
IF7AFF220050662	<b>21</b>	<b>20</b>	2x2.5-5-10	8	5-15	125	9	5LGA	47	56	–	60
IF7AFF230050662	<b>31</b>	<b>30</b>	2x5-2x10	6	2x15	125	9	5LGA	57	56	–	60
IF7AFF240050662	<b>42</b>	<b>40</b>	2x5-10-20	8	2x10-20	125	9	5LGA	74	57	–	60
IF7AFF250050662	<b>52</b>	<b>50</b>	2x5-2x10-20	10	10-2x20	125	9	5LGA	78	57	–	60
IF7AFF260050662	<b>62</b>	<b>60</b>	2x10-2x20	6	3x20	250	9	5LGA	100	57	–	60
IF7AFF270050662	<b>73</b>	<b>70</b>	10-3x20	7	10-3x20	250	9	5LGA	112	58	–	61
IF7AFF280050662	<b>83</b>	<b>80</b>	2x10-3x20	8	4x20	250	9	5LGA	126	58	–	61

#### MIDImatic

IL4FFF311050892	<b>116</b>	<b>110</b>	10-20-2x40	11	50-60	250	15	8BGA	205	64	–	–
IL4FFF315050892	<b>158</b>	<b>150</b>	10-20-3x40	15	40-50-60	400	20	8BGA	245	64	–	–
IL4FFF318050892	<b>194</b>	<b>180</b>	20-2x40-80	9	40-60-80	400	20	8BGA	285	64	–	–
IL4FFF322050892	<b>235</b>	<b>220</b>	20-40-2x80	11	60-2x80	630	20	8BGA	300	64	–	–

#### MULTImatic

IN7AFF310050701	<b>107</b>	<b>100</b>	20-2x40	5	40-60	250	17	8BGA	220	–	72	75
IN7AFF314050701	<b>150</b>	<b>140</b>	20-40-80	7	60-80	400	25	8BGA	260	–	72	75
IN7AFF318050701	<b>194</b>	<b>180</b>	20-2x40-80	9	40-60-80	400	25	8BGA	300	–	72	75
IN7AFF322050701	<b>235</b>	<b>220</b>	20-40-2x80	11	60-2x80	630	25	8BGA	325	–	72	75
IN7AFF326050701	<b>278</b>	<b>260</b>	20-2x40-2x80	13	40-60-2x80	630	25	8BGA	365	–	74	82
IN7AFF330050701	<b>321</b>	<b>300</b>	20-40-3x80	15	60-3x80	800	50	8BGA	385	–	74	82
IN7AFF334050701	<b>364</b>	<b>340</b>	20-2x40-3x80	17	40-60-3x80	800	50	8BGA	415	–	70	76
IN7AFF338050701	<b>407</b>	<b>380</b>	20-40-4x80	19	60-4x80	1250	50	8BGA	445	–	70	76
IN7AFF342050701	<b>450</b>	<b>420</b>	20-2x40-2x80-160	21	40-60-4x80	1250	50	8BGA	475	–	71	77
IN7AFF346050701	<b>492</b>	<b>460</b>	20-40-3x80-160	23	60-5x80	1250	50	8BGA	505	–	71	77
IN7AFF350050701	<b>535</b>	<b>500</b>	20-2x40-80-2x160	25	40-60-5x80	2x630	25	8BGA	775	–	94	86
IN7AFF356050701	<b>600</b>	<b>560</b>	80-3x160	7	7x80	2x800	50	8BGA	800	–	94	86
IN7AFF364050701	<b>685</b>	<b>640</b>	2x80-3x160	8	8x80	2x800	50	8BGA	860	–	94	86
IN7AFF372050701	<b>770</b>	<b>720</b>	80-4x160	9	9x80	2x1250	50	8BGA	920	–	90	96
IN7AFF380050701	<b>856</b>	<b>800</b>	2x80-4x160	10	10x80	2x1250	50	8BGA	980	–	90	96
IN7AFF388050701	<b>942</b>	<b>880</b>	80-5x160	11	11x80	2x1250	50	8BGA	1040	–	91	95
IN7AFF396050701	<b>1027</b>	<b>960</b>	2x80-3x160-320	12	12x80	2x1250	50	8BGA	1100	–	91	95

1. MULTImatic of several columns have a disconnecter and a cable entry for each column.

2. Other values upon request. For MIDImatic series short-circuit withstand current conditioned by the upstream protective device.

3. For part numbers contact us.

# FH20

## Detuned racks MINIrack | MULTIrack

U <sub>e</sub>	U <sub>N</sub>	U <sub>MAX</sub> *	f	THDIR%	I <sub>250HZ</sub> %**	THDVR%	f <sub>D</sub>
400-415V	550V	600V	50Hz	100%	≤25%	≤6%	180Hz

\* Maximum admissible value according to IEC 60831-1.

\*\* Percent current of 5th harmonic.

## Generalities

- Contactors for capacitive loads.
- FS17 450/750V self-extinguish cable according to EN 50525 - EN 50575 - EN 50575/A1.
- Fuses with high breaking power NH00-gG.
- CRM25 single phase self-healing metallized polypropylene capacitor with U<sub>N</sub>=550V rated voltage.
- Discharge devices.
- Three phase detuning choke with tuning frequency f<sub>D</sub>=180Hz (N=3.6-p%=7.7%).

Racks can be used as spare parts in ICAR power factor correction systems properly maintained and in suitably ventilated / conditioned third-party electrical panels (max internal temperature 55°C).

The MULTIrack version is also available in the /S version thyristor switched for fast changing loads and / or where high noise is required.

## Technical characteristics

Rated operational voltage	U <sub>e</sub> =400-415V
Rated frequency	50Hz
Max current overload I <sub>n</sub> (bank)	1,3 I <sub>n</sub>
Max current overload I <sub>n</sub> (capacitors @40°C)	1,3 I <sub>n</sub> (continuous) 2 I <sub>n</sub> (x380s every 60 minutes) 3 I <sub>n</sub> (x150s every 60 minutes) 4 I <sub>n</sub> (x70s every 60 minutes) 5 I <sub>n</sub> (x45s every 60 minutes)
Max overload V <sub>n</sub> (bank)	1,1xU <sub>e</sub>
Max overload V <sub>n</sub> (capacitors)	3xU <sub>N</sub> (for 1 minute)
Insulation voltage	690V
Temperature class (bank)	-5/+40°C
Temperature class (capacitors)	-25/+55°C
Discharge device	mounted on each bank
Installation	indoor
Service	continuous
Internal connection	delta
Total losses	~ 6W/kvar
Inner surface finish	zinc passivation
Standards (bank)	IEC 61439-1/2, IEC 61921
Standards (capacitors)	IEC 60831-1/2

Part number	Power [kvar]		Steps U <sub>e</sub> =400V	Weight	Dimensions
	U <sub>e</sub> =415V	U <sub>e</sub> =400V	[A]	[kg]	(see chap. 5)

### MINIrack

IW7TFK155050010	<b>5,5</b>	<b>5</b>	2x2.5	14	135
IW7TFK210050274	<b>11</b>	<b>10</b>	2x5	19	135
IW7TFK210050010	<b>11</b>	<b>10</b>	10	15	135
IW7TFK215050010	<b>16</b>	<b>15</b>	5-10	22	135
IW7TFK220050248	<b>21</b>	<b>20</b>	2x10	24	135
IW7TFK220050010	<b>21</b>	<b>20</b>	20	20	135

### MULTIrack

IX7TFF220050010	<b>21</b>	<b>20</b>	20	25	130
IX7TFF240050010	<b>42</b>	<b>40</b>	40	38	130
IX7TFF250050877	<b>54</b>	<b>50</b>	10-40	56	130
IX7TFF260050010	<b>63</b>	<b>60</b>	20-40	63	130
IX7TFF280050010	<b>84</b>	<b>80</b>	80	54	130



## Detuned automatic PFC system MINImatic | MULTImatic

U <sub>e</sub>	U <sub>N</sub>	U <sub>MAX</sub> *	f	THDIR%	I <sub>250Hz</sub> %**	THDVR%	f <sub>D</sub>
400-415V	550V	600V	50Hz	100%	>25%	≤6%	135Hz

\* Maximum admissible value according to IEC 60831-1.

\*\* Percent current of 5th harmonic.

### Generalities

- Zink-passivated metallic enclosure painted with epossidic dust paint, colour RAL 7035.
- Auxiliary transformer to separate power and auxiliary circuit parts (110V).
- Load-break switch with door interlock.
- Contactors for capacitive loads.
- FS17 450/750V self-extinguish cable according to EN 50525 - EN 50575 - EN 50575/A1.
- Microprocessor Power Factor Correction relay.
- Control and protection multimeter MCP5, integrated in 8BGA controller (MULTImatic version).
- CRM25 single phase self-healing metallized polypropylene capacitor with U<sub>N</sub>=550V rated voltage.
- Three phase detuning choke with tuning frequency f<sub>D</sub>=135Hz (N=2.7-p%=13.7%).

The MULTImatic version is also available in the /S version thyristor switched for fast changing loads and / or where high noise is required.

### Technical characteristics

Rated operational voltage	U <sub>e</sub> =400-415V
Rated frequency	50Hz
Max current overload I <sub>n</sub> (bank)	1,3 I <sub>n</sub>
Max current overload I <sub>n</sub> (capacitors @40°C)	1,3 I <sub>n</sub> (continuous) 2 I <sub>n</sub> (x380s every 60 minutes) 3 I <sub>n</sub> (x150s every 60 minutes) 4 I <sub>n</sub> (x70s every 60 minutes) 5 I <sub>n</sub> (x45s every 60 minutes)
Max overload V <sub>n</sub> (bank)	1,1xU <sub>e</sub>
Max overload V <sub>n</sub> (capacitors)	3xU <sub>N</sub> (for 1 minute)
Insulation voltage	690V
Temperature class (bank)	-5/+40°C
Temperature class (capacitors)	-25/+55°C
Discharge device	mounted on each bank
Installation	indoor
Service	continuous
Internal connection	delta
Total losses	~ 8W/kvar
Inner surface finish	zinc passivation
Standards (bank)	IEC 61439-1/2, IEC 61921
Standards (capacitors)	IEC 60831-1/2

Part number	Power [kvar]		Steps U <sub>e</sub> =400V	Electrical steps number	Banks [kvar]	LBS <sup>1</sup> [A]	I <sub>cc</sub> <sup>2</sup> [kA]	PFC relay	Weight [kg]	Dimensions (see chap. 5)		
	U <sub>e</sub> =415V	U <sub>e</sub> =400V								IP3X	IP4X	IP55 <sup>3</sup>

#### MINImatic

IF7JFF210050671	<b>11</b>	<b>10</b>	2x2.5-5	4	2x5	125	9	5LGA	41	56	—	60
IF7JFF220050671	<b>21</b>	<b>20</b>	2x2.5-5-10	8	5-15	125	9	5LGA	47	56	—	60
IF7JFF230050671	<b>31</b>	<b>30</b>	2x5-2x10	6	2x15	125	9	5LGA	57	56	—	60
IF7JFF240050671	<b>42</b>	<b>40</b>	2x5-10-20	8	2x10-20	125	9	5LGA	74	57	—	60
IF7JFF250050671	<b>52</b>	<b>50</b>	2x5-2x10-20	10	3x10-20	125	9	5LGA	78	58	—	61
IF7JFF260050671	<b>62</b>	<b>60</b>	2x10-2x20	6	2x10-2x20	250	9	5LGA	100	58	—	61
IF7JFF270050671	<b>73</b>	<b>70</b>	10-3x20	7	10-3x20	250	9	5LGA	112	58	—	61

#### MULTImatic

IN7JFF310050702	<b>107</b>	<b>100</b>	20-2x40	5	40-60	250	17	8BGA	220	—	72	75
IN7JFF314050702	<b>150</b>	<b>140</b>	20-40-80	7	60-80	400	25	8BGA	260	—	72	75
IN7JFF318050702	<b>194</b>	<b>180</b>	20-2x40-80	9	40-60-80	400	25	8BGA	300	—	72	75
IN7JFF322050702	<b>235</b>	<b>220</b>	20-40-2x80	11	60-2x80	630	25	8BGA	325	—	72	75
IN7JFF326050702	<b>278</b>	<b>260</b>	20-2x40-2x80	13	40-60-2x80	630	25	8BGA	365	—	74	82
IN7JFF330050702	<b>321</b>	<b>300</b>	20-40-3x80	15	60-3x80	800	50	8BGA	385	—	74	82
IN7JFF334050702	<b>364</b>	<b>340</b>	20-2x40-3x80	17	40-60-3x80	800	50	8BGA	415	—	70	76
IN7JFF338050702	<b>407</b>	<b>380</b>	20-40-4x80	19	60-4x80	1250	50	8BGA	445	—	70	76
IN7JFF342050702	<b>450</b>	<b>420</b>	20-2x40-2x80-160	21	40-60-4x80	1250	50	8BGA	475	—	71	77
IN7JFF346050702	<b>492</b>	<b>460</b>	20-40-3x80-160	23	60-5x80	1250	50	8BGA	505	—	71	77
IN7JFF350050702	<b>535</b>	<b>500</b>	20-2x40-80-2x160	25	40-60-5x80	2x630	25	8BGA	775	—	94	86
IN7JFF356050702	<b>600</b>	<b>560</b>	80-3x160	7	7x80	2x800	50	8BGA	800	—	94	86
IN7JFF364050702	<b>685</b>	<b>640</b>	2x80-3x160	8	8x80	2x800	50	8BGA	860	—	94	86
IN7JFF372050702	<b>770</b>	<b>720</b>	80-4x160	9	9x80	2x1250	50	8BGA	920	—	90	96
IN7JFF380050702	<b>856</b>	<b>800</b>	2x80-4x160	10	10x80	2x1250	50	8BGA	980	—	90	96
IN7JFF388050702	<b>942</b>	<b>880</b>	80-5x160	11	11x80	2x1250	50	8BGA	1040	—	91	95
IN7JFF396050702	<b>1027</b>	<b>960</b>	2x80-3x160-320	12	12x80	2x1250	50	8BGA	1100	—	91	95

1. MULTImatic of several columns have a disconnector and a cable entry for each column.

2. Other values upon request.

3. For part numbers contact us.

# FH30

## Detuned racks MINIrack | MULTIrack

U <sub>e</sub>	U <sub>N</sub>	U <sub>MAX</sub> *	f	THDIR%	I <sub>250HZ</sub> %**	THDVR%	f <sub>D</sub>
400-415V	550V	600V	50Hz	100%	>25%	≤6%	135Hz

\* Maximum admissible value according to IEC 60831-1.

\*\* Percent current of 5th harmonic.

## Generalities

- Contactors for capacitive loads.
- FS17 450/750V self-extinguish cable according to EN 50525 - EN 50575 - EN 50575/A1.
- Fuses with high breaking power NH00-gG.
- CRM25 single phase self-healing metallized polypropylene capacitor with U<sub>N</sub>=550V rated voltage.
- Discharge devices.
- Three phase detuning choke with tuning frequency
- f<sub>D</sub>=135Hz (N=2.7-p%=13.7%).

Racks can be used as spare parts in ICAR power factor correction systems properly maintained and in suitably ventilated / conditioned third-party electrical panels (max internal temperature 55°C)..

The MULTIrack version is also available in the /S version thyristor switched for fast changing loads and / or where high noise is required.

## Technical characteristics

Rated operational voltage	U <sub>e</sub> =400-415V
Rated frequency	50Hz
Max current overload I <sub>n</sub> (bank)	1,3 I <sub>n</sub>
Max current overload I <sub>n</sub> (capacitors @40°C)	1,3 I <sub>n</sub> (continuous) 2 I <sub>n</sub> (x380s every 60 minutes) 3 I <sub>n</sub> (x150s every 60 minutes) 4 I <sub>n</sub> (x70s every 60 minutes) 5 I <sub>n</sub> (x45s every 60 minutes)
Max overload V <sub>n</sub> (bank)	1,1xU <sub>e</sub>
Max overload V <sub>n</sub> (capacitors)	3xU <sub>N</sub> (for 1 minute)
Insulation voltage	690V
Temperature class (bank)	-5/+40°C
Temperature class (capacitors)	-25/+55°C
Discharge device	mounted on each bank
Installation	indoor
Service	continuous
Internal connection	delta
Total losses	~ 8W/kvar
Inner surface finish	zinc passivation
Standards (bank)	IEC 61439-1/2, IEC 61921
Standards (capacitors)	IEC 60831-1/2

Part number	Power [kvar]		Steps U <sub>e</sub> =400V	Weight	Dimensions
	U <sub>e</sub> =415V	U <sub>e</sub> =400V	[A]	[kg]	(see chap. 5)

### MINIrack

IW7JFK155050009	<b>5.5</b>	<b>5</b>	2x2.5	14	135
IW7JFK210050249	<b>11</b>	<b>10</b>	2x5	21	135
IW7JFK210050009	<b>11</b>	<b>10</b>	10	17	135
IW7JFK215050009	<b>16</b>	<b>15</b>	5-10	24	135
IW7JFK220050009	<b>21</b>	<b>20</b>	20	22	135

### MULTIrack

IX7JFF220050009	<b>21</b>	<b>20</b>	20	27	130
IX7JFF240050009	<b>42</b>	<b>40</b>	40	40	130
IX7JFF260050009	<b>63</b>	<b>60</b>	20-40	65	130
IX7JFF280050009	<b>84</b>	<b>80</b>	80	56	130



# POWER FACTOR CORRECTION SOLUTIONS WITH HIGH GRADIENT METALLIZED POLYPROPYLENE PLUS CAPACITORS



Range	FIX PFC systems	Automatic PFC systems	Racks	Nominal voltage $U_e$	Capacitors voltage $U_N$	THDI <sub>R</sub> %	THDI <sub>C</sub> %	I <sub>250Hz</sub> %	THDVR%	f <sub>D</sub>
VP10	✓	✓	✓	400V	400V	≤27%	≤85%	–	–	–
VP20	✓	✓	✓	400-415V	460V	≤27%	≤90%	–	–	–
FV25	✓	✓	✓	400V	460V	100%	–	≤25%	≤6%	180Hz
FV25V		✓	✓	400V	460V	100%	–	≤25%	≤8%	180Hz
FV35		✓	✓	400V	550V	100%	–	>25%	≤6%	135Hz

Used capacitor

# CRM25-1



Generalities

- High gradient metallized polypropylene capacitors with increased thickness (plus).
- Metallic case with protection degree IP00.
- Internal overpressure protection system.
- Resin filling.

Technical characteristics

Rated operational voltage	Ue=400-460V
Rated frequency	50Hz
Max current overload In	1,3 In (continuous) 2 In (x500s every 60 minutes) 3 In (x180s every 60 minutes) 4 In (x90s every 60 minutes) 5 In (x50s every 60 minutes)
Max voltage overload Vn	3xUN (for 1 minute)
Temperature class	-25/70°C
Life expectancy	100.000h
Capacitance tolerance	-5% ÷ +10%
Service	continuous
Construction type	high gradient polypropylene with increased thickness (plus)
Standards	IEC 60831-1/2

Part Number	Rated voltage UN [V]	MAX voltage UMAX [V]	Power [kvar]	Capacitance [µF]	Dimensions x h [mm]	Weight [kg]	Pcs/box
VP10							
6DCRM00250D50	400	440	2,5	50	60x140	0,5	36
VP20   FV25   FV25V							
6DCRM00250B50	460	500	2,5	37	60x140	0,5	36
FV35							
6DCRM00250C50	550	600	2,5	28	60x140	0,5	36
VP10 kit*							
ICRM25250400	400	440	2,5	50	310x70x220	1,5	3
VP20 kit*							
ICRM25250460	460	500	2,5	37	310x70x220	1,5	3
FV35 kit*							
ICRM25250550	550	600	2,5	28	310x70x220	1,5	3

\* Kit consists of 3 capacitors, nuts and washers, discharge resistors.



## Fix PFC system SUPERriphaso | MICROfix

U <sub>e</sub>	U <sub>N</sub>	U <sub>MAX</sub> *	f	THD <sub>IR</sub> %	THD <sub>IC</sub> %**
400V	400V	440V	50Hz	≤27%	≤85%

\* Maximum admissible value according to IEC 60831-1.

\*\* Attention: in this conditions of load network harmonic amplification phenomena is possible.

### SUPERriphaso

#### Generalities

- Self-extinguishing plastic enclosure painted with epossidic dust paint, colour RAL7030.
- IP40 protection degree.
- CRM25 single phase self-healing metallized polypropylene capacitor with increased thickness and U<sub>N</sub>=400V rated voltage.
- Discharge resistance.

SUPERriphaso VP10 modules can be combined, with the mechanical and electrical connection elements supplied, to make monoblocks of up to 6 units (45kvar to 400V).

#### Technical characteristics

Rated operational voltage	U <sub>e</sub> =400V
Rated frequency	50Hz
Max current overload I <sub>n</sub> (@40°C)	1,3 I <sub>n</sub> (continuous) 2 I <sub>n</sub> (x500s every 60 minutes) 3 I <sub>n</sub> (x180s every 60 minutes) 4 I <sub>n</sub> (x90s every 60 minutes) 5 I <sub>n</sub> (x50s every 60 minutes)
Max overload V <sub>n</sub>	3xU <sub>N</sub> (for 1 minute)
Insulation voltage	3/8kV - U <sub>e</sub> ≤ 660V
Temperature class	-5/+40°C
Discharge device	mounted on each bank
Installation	indoor
Service	continuous
Internal connection	delta
Total losses	~ 0,6W/kvar
Standards	IEC 60831-1/2

Part number	Power [kvar]	Modules	Weight	Dimensions IP40 (see chap. 5)
	U <sub>e</sub> =400V	[Nr.]	[kg]	

#### SUPERriphaso

IA3VFF175050001	<b>7,5</b>	1	2,1	21
-----------------	------------	---	-----	----

### MICROfix

#### Generalities

- Zinc-passivated metallic enclosure painted with epossidic dust paint, colour RAL 7035.
- Load-break switch with door interlock.
- Fuses with high breaking power NH00-gG.
- FS17 450/750V self-extinguish cable according to EN 50525 - EN 50575 - EN 50575/A1.
- IP3X protection degree.
- CRM25 single phase self-healing metallized polypropylene capacitor with increased thickness and U<sub>N</sub>=400V rated voltage.
- Discharge resistance.
- Signal lamp power on.

#### Technical characteristics

Rated operational voltage	U <sub>e</sub> =400V
Rated frequency	50Hz
Max current overload I <sub>n</sub> (bank)	1,3 I <sub>n</sub>
Max current overload I <sub>n</sub> (capacitors @40°C)	1,3 I <sub>n</sub> (continuous) 2 I <sub>n</sub> (x500s every 60 minutes) 3 I <sub>n</sub> (x180s every 60 minutes) 4 I <sub>n</sub> (x90s every 60 minutes) 5 I <sub>n</sub> (x50s every 60 minutes)
Max overload V <sub>n</sub> (bank)	1,1xU <sub>e</sub>
Max overload V <sub>n</sub> (capacitors)	3xU <sub>N</sub> (for 1 minute)
Insulation voltage	690V
Temperature class (bank)	-5/+40°C
Temperature class (capacitors)	-25/+70°C
Discharge device	mounted on each bank
Installation	indoor
Service	continuous
Internal connection	delta
Total losses	~ 2W/kvar
Inner surface finish	zinc passivation
Standards (bank)	IEC 61439-1/2, IEC 61921
Standards (capacitors)	IEC 60831-1/2

Part number	Power [kvar]	LBS	I <sub>cc</sub> <sup>1</sup>	Weight	Dimensions IP3X (see chap. 5)
	U <sub>e</sub> =400V	[Nr.]	[kA]	[kg]	

#### MICROfix

IB5VFF215050987	<b>15</b>	40	50	12	43
IB5VFF222550987	<b>22,5</b>	80	50	15	44
IB5VFF230050987	<b>30</b>	80	50	18	44

1. Other values upon request. Short-circuit withstand current conditioned by the upstream protective device.



## Automatic PFC system MICROmatic | MINImatic | MULTImatic

U <sub>e</sub>	U <sub>N</sub>	U <sub>MAX</sub> *	f	THD <sub>IR</sub> %	THD <sub>IC</sub> %**
400V	400V	440V	50Hz	≤27%	≤85%

\* Maximum admissible value according to IEC 60831-1.

\*\* Attention: in this conditions of load network harmonic amplification phenomena is possible.

### Generalities

- Zink-passivated metallic enclosure painted with epossidic dust paint, colour RAL 7035.
- Auxiliary transformer to separate power and auxiliary circuit parts (110V).
- Load-break switch with door interlock.
- Special contactors with damping resistors to limit capacitors inrush current (AC6b).
- FS17 450/750V self-extinguish cable according to EN 50525 - EN 50575 - EN 50575/A1.
- Microprocessor Power Factor Correction relay.
- CRM25 single phase self-healing metallized polypropylene capacitor with increased thickness and U<sub>N</sub>=400V rated voltage.

### Technical characteristics

Rated operational voltage	U <sub>e</sub> =400V
Rated frequency	50Hz
Max current overload I <sub>n</sub> (bank)	1,3 I <sub>n</sub>
Max current overload I <sub>n</sub> (capacitors @40°C)	1,3 I <sub>n</sub> (continuous) 2 I <sub>n</sub> (x500s every 60 minutes) 3 I <sub>n</sub> (x180s every 60 minutes) 4 I <sub>n</sub> (x90s every 60 minutes) 5 I <sub>n</sub> (x50s every 60 minutes)
Max overload V <sub>n</sub> (bank)	1,1xU <sub>e</sub>
Max overload V <sub>n</sub> (capacitors)	3xU <sub>N</sub> (for 1 minute)
Insulation voltage	690V
Temperature class (bank)	-5/+40°C
Temperature class (capacitors)	-25/+70°C
Discharge device	mounted on each bank
Installation	indoor
Service	continuous
Internal connection	delta
Operation devices	capacitors contactors (AC6b)
Total losses	~ 2W/kvar
Inner surface finish	zinc passivation
Standards (bank)	IEC 61439-1/2, IEC 61921
Standards (capacitors)	IEC 60831-1/2

Part number	Power [kvar]	Steps U <sub>e</sub> =400V	Electrical steps number	Banks	LBS <sup>1</sup>	I <sub>cc</sub> <sup>2</sup>	PFC relay	Weight	Dimensions (see chap. 5)		
	U <sub>e</sub> =400V			[kvar]	[A]	[kA]		[kg]	IP3X	IP4X	IP55 <sup>3</sup>

#### MICROmatic

IC2VFF222050652	<b>22</b>	2-4-2x8	11	2-4-2x8	63	50	5LGA	16	50	–	–
IC2VFF230050652	<b>30</b>	2-4-8-16	15	2-4-3x8	80	50	5LGA	17	50	–	–
IC2VFF236050652	<b>36</b>	4-2x8-16	9	4-4x8	100	50	5LGA	22	50	–	–

#### MINImatic

IF2VFF237550652	<b>37,5</b>	7,5-2x15	5	37,5	125	9	5LGA	81	55	–	60
IF2VFF252550652	<b>52,5</b>	7,5-15-30	7	15-37,5	125	9	5LGA	84	56	–	60
IF2VFF275050652	<b>75</b>	7,5-15-22,5-30	10	2x37,5	250	9	5LGA	94	56	–	60
IF2VFF290050652	<b>90</b>	7,5-15-30-38	12	15-2x37,5	250	9	5LGA	106	57	–	60
IF2VFF311250652	<b>112,5</b>	7,5-15-30-60	15	3x37,5	250	9	5LGA	115	57	–	60
IF2VFF313550652	<b>135</b>	15-2x30-60	9	22,5-3x37,5	400	9	5LGA	126	58	–	61
IF2VFF315050652	<b>150</b>	15-30-45-60	10	4x37,5	400	9	5LGA	132	58	–	61

#### MULTImatic

IN2VFF316550700	<b>165</b>	15-5x30	11	2x82,5	400	25	8BGA	240	–	72	75
IN2VFF320650700	<b>206</b>	19-5x38	11	41-2x83	630	25	8BGA	280	–	72	75
IN2VFF324850700	<b>248</b>	23-5x45	11	3x82,5	630	25	8BGA	300	–	72	75
IN2VFF328950700	<b>289</b>	26-5x53	11	41,25-3x82,5	630	25	8BGA	340	–	74	81
IN2VFF333050700	<b>330</b>	30-5x60	11	4x82,5	800	50	8BGA	360	–	74	81
IN2VFF337150700	<b>371</b>	34-5x68	11	41,25-4x82,5	800	50	8BGA	400	–	70	73
IN2VFF341350700	<b>413</b>	38-5x75	11	5x82,5	1250	50	8BGA	420	–	70	73
IN2VFF345450700	<b>454</b>	41-5x83	11	41,25-5x82,5	1250	50	8BGA	490	–	71	78
IN2VFF349550700	<b>495</b>	45-5x90	11	6x82,5	1250	50	8BGA	505	–	71	78
IN2VFF353650700	<b>536</b>	49-5x98	11	41,25-6x82,5	2x630	25	8BGA	640	–	94	85
IN2VFF357850700	<b>578</b>	53-5x105	11	7x82,5	2x800	50	8BGA	660	–	94	85
IN2VFF361950700	<b>619</b>	56-5x113	11	41,25-7x82,5	2x800	50	8BGA	700	–	94	85
IN2VFF366050700	<b>660</b>	60-5x120	11	8x82,5	2x800	50	8BGA	720	–	94	85
IN2VFF370150700	<b>701</b>	64-5x128	11	41,25-8x82,5	2x800	50	8BGA	740	–	90	93
IN2VFF374350700	<b>743</b>	68-5x135	11	9x82,5	2x1250	50	8BGA	760	–	90	93
IN2VFF378450700	<b>784</b>	71-5x143	11	41,25-9x82,5	2x1250	50	8BGA	820	–	90	93
IN2VFF382550700	<b>825</b>	75-5x150	11	10x82,5	2x1250	50	8BGA	840	–	90	93
IN2VFF390850700	<b>908</b>	83-5x165	11	11x82,5	2x1250	50	8BGA	980	–	91	98
IN2VFF399050700	<b>990</b>	90-5x180	11	12x82,5	2x1250	50	8BGA	1010	–	91	98

1. MULTImatic of several columns have a disconnecter and a cable entry for each column.

2. Other values upon request. For MICROmatic series short-circuit withstand current conditioned by the upstream protective device.

3. For part numbers contact us.





## Racks MINIrack | MULTIrack

U <sub>e</sub>	U <sub>N</sub>	U <sub>MAX</sub> *	f	THD <sub>I</sub> %	THD <sub>I</sub> %**
400V	400V	440V	50Hz	≤27%	≤85%

\* Maximum admissible value according to IEC 60831-1.

\*\* Attention: in this conditions of load network harmonic amplification phenomena is possible.

### Generalities

- Special contactors with damping resistors to limit capacitors inrush current (AC6b).
- FS17 450/750V self-extinguish cable according to EN 50525 - EN 50575 - EN 50575/A1.
- Fuses with high breaking power NH00-gG.
- CRM25 single phase self-healing metallized polypropylene capacitor with increased thickness and U<sub>N</sub>=400V rated voltage.
- Discharge devices.

Racks can be used as spare parts in ICAR power factor correction systems properly maintained and in suitably ventilated / conditioned third-party electrical panels (max internal temperature 55°C).

### Technical characteristics

Rated operational voltage	U <sub>e</sub> =400V
Rated frequency	50Hz
Max current overload I <sub>n</sub> (rack)	1,3 I <sub>n</sub>
Max current overload I <sub>n</sub> (capacitors @40°C)	1,3 I <sub>n</sub> (continuous) 2 I <sub>n</sub> (x500s every 60 minutes) 3 I <sub>n</sub> (x180s every 60 minutes) 4 I <sub>n</sub> (x90s every 60 minutes) 5 I <sub>n</sub> (x50s every 60 minutes)
Max overload V <sub>n</sub> (rack)	1,1 x U <sub>e</sub>
Max overload V <sub>n</sub> (capacitors)	3 x U <sub>N</sub> (for 1 minute)
Insulation voltage	690V
Temperature class (rack)	-5/+40°C
Temperature class (capacitors)	-25/+70°C
Discharge device	mounted on each bank
Installation	indoor
Service	continuous
Internal connection	delta
Total losses	~ 2W/kvar
Inner surface finish	zinc passivation
Standards (bank)	IEC 61439-1/2, IEC 61921
Standards (capacitors)	IEC 60831-1/2

Part number	Power [kvar]	Steps U <sub>e</sub> =400V	Weight	Dimensions
	U <sub>e</sub> =400V	[A]	[kg]	(see chap. 5)

#### MINIrack

IW2VFF175050000	<b>7,5</b>	7,5	10	110
IW2VFF215050000	<b>15</b>	15	11	110
IW2VFF222550000	<b>22,5</b>	7,5-15	13	110
IW2VFF230050000	<b>30</b>	2x15	14	110
IW2VFF237550000	<b>37,5</b>	7,5-2x15	16	110

#### MULTIrack

IX2VFF241250000	<b>41,25</b>	3,75-5x7,5	19	120
IX2VFF282550000	<b>82,5</b>	7,5-5x15	27	120



VP20

## Fix PFC system SUPERriphaso

U <sub>e</sub>	U <sub>N</sub>	U <sub>MAX</sub> *	f	THD <sub>IR</sub> %	THD <sub>IC</sub> %**
400-415V	460V	500V	50Hz	≤27%	≤90%

\* Maximum admissible value according to IEC 60831-1.

\*\* Attention: in this conditions of load network harmonic amplification phenomena is possible.

### Generalities

- Self-extinguishing plastic enclosure painted with epossidic dust paint, colour RAL7030.
- IP40 protection degree.
- CRM25 single phase self-healing metallized polypropylene capacitor with increased thickness and U<sub>N</sub>=460V rated voltage.
- Discharge resistance.

SUPERriphaso VP20 modules can be combined, with the mechanical and electrical connection elements supplied, to make monoblocks of up to 6 units (36kvar to 415V).

Part number	Power [kvar]		Modules	Weight	Dimensions IP40 (see chap. 5)
	U <sub>N</sub> =460V	U <sub>e</sub> =400V	[Nr.]	[kg]	

#### SUPERriphaso

IA3ZLK175050001	<b>7,5</b>	<b>5,5</b>	1	2,1	21
-----------------	------------	------------	---	-----	----

### Technical characteristics

Rated operational voltage	U <sub>e</sub> =400-415V
Rated frequency	50Hz
Max current overload I <sub>n</sub> (@40°C)	1,3 I <sub>n</sub> (continuous) 2 I <sub>n</sub> (x500s every 60 minutes) 3 I <sub>n</sub> (x180s every 60 minutes) 4 I <sub>n</sub> (x90s every 60 minutes) 5 I <sub>n</sub> (x50s every 60 minutes)
Max overload V <sub>n</sub>	3xU <sub>N</sub> (for 1 minute)
Insulation voltage	3/8kV - U <sub>e</sub> ≤ 660V
Temperature class	-5/+40°C
Discharge device	mounted on each bank
Installation	indoor
Service	continuous
Internal connection	delta
Total losses	~ 0,5W/kvar
Standards	IEC 60831-1/2

# VP20 Automatic PFC system MINImatic | MULTImatic

U <sub>e</sub>	U <sub>N</sub>	U <sub>MAX</sub> *	f	THDI <sub>R</sub> %	THDI <sub>C</sub> %**
400-415V	460V	500V	50Hz	≤27%	≤90%

\* Maximum admissible value according to IEC 60831-1.

\*\* Attention: in this conditions of load network harmonic amplification phenomena is possible.

## Generalities

- Zink-passivated metallic enclosure painted with epossidic dust paint, colour RAL 7035.
- Auxiliary transformer to separate power and auxiliary circuit parts (110V).
- Load-break switch with door interlock.
- Special contactors with damping resistors to limit capacitors inrush current (AC6b).
- FS17 450/750V self-extinguish cable according to EN 50525 - EN 50575 - EN 50575/A1.
- Microprocessor Power Factor Correction relay.
- CRM25 single phase self-healing metallized polypropylene capacitor with increased thickness and U<sub>N</sub>=460V rated voltage.

## Technical characteristics

Rated operational voltage	U <sub>e</sub> =400-415V
Rated frequency	50Hz
Max current overload I <sub>n</sub> (bank)	1,3 I <sub>n</sub>
Max current overload I <sub>n</sub> (capacitors @40°C)	1,3 I <sub>n</sub> (continuous) 2 I <sub>n</sub> (x500s every 60 minutes) 3 I <sub>n</sub> (x180s every 60 minutes) 4 I <sub>n</sub> (x90s every 60 minutes) 5 I <sub>n</sub> (x50s every 60 minutes)
Max overload V <sub>n</sub> (bank)	1,1 x U <sub>e</sub>
Max overload V <sub>n</sub> (capacitors)	3 x U <sub>N</sub> (for 1 minute)
Insulation voltage	690V
Temperature class (bank)	-5/+40°C
Temperature class (capacitors)	-25/+70°C
Discharge device	mounted on each bank
Installation	indoor
Service	continuous
Internal connection	delta
Operation devices	capacitors contactors (AC6b)
Total losses	~ 2W/kvar
Inner surface finish	zinc passivation
Standards (bank)	IEC 61439-1/2, IEC 61921
Standards (capacitors)	IEC 60831-1/2

Part number	Power [kvar]			Steps Ue=400V	Electrical steps number	Banks	LBS <sup>1</sup>	Icc <sup>2</sup>	PFC relay	Weight	Dimensions (see chap. 5)		
	UN=460V	Ue=415V	Ue=400V			[kvar]	[A]	[kA]		[kg]	IP3X	IP4X	IP55 <sup>3</sup>
MINImatic													
IF2ZLF237550652	37,5	30	28	5,6-2x11,2	5	28	125	9	5LGA	81	55	—	60
IF2ZLF252550652	52,5	42	39	5,6-11,2-22,4	7	11-28	125	9	5LGA	84	56	—	60
IF2ZLF275050652	75	60	56	5,6-11,2-16,8-22,4	10	2x28	250	9	5LGA	94	56	—	60
IF2ZLF290050652	90	73	68	5,6-11,2-22,4-28	12	11-2x28	250	9	5LGA	106	57	—	60
IF2ZLF311250652	112,5	90	84	5,6-11,2-22,4-44,8	15	3x28	250	9	5LGA	115	57	—	60
IF2ZLF313550652	135	108	101	11,2-22,4-22,4-44,8	9	16.8-3x28	400	9	5LGA	126	58	—	61
IF2ZLF315050652	150	120	112	11,2-22,4-33,6-44,8	10	4x28	400	9	5LGA	132	58	—	61

<b>MULTImatic</b>													
IN2ZLF316550700	<b>165</b>	<b>133</b>	<b>124</b>	11-5x22	11	2x62	400	25	8BGA	240	–	72	75
IN2ZLF320650700	<b>206</b>	<b>166</b>	<b>155</b>	14-5x28	11	31-2x62	400	25	8BGA	280	–	72	75
IN2ZLF324850700	<b>248</b>	<b>199</b>	<b>186</b>	17-5x34	11	3x62	630	25	8BGA	300	–	72	75
IN2ZLF328950700	<b>289</b>	<b>232</b>	<b>217</b>	20-5x40	11	31-3x62	630	25	8BGA	340	–	74	81
IN2ZLF333050700	<b>330</b>	<b>265</b>	<b>248</b>	22,5-5x45	11	4x62	630	25	8BGA	360	–	74	81
IN2ZLF337150700	<b>371</b>	<b>297</b>	<b>278</b>	25-5x50	11	31-4x62	630	25	8BGA	400	–	70	73
IN2ZLF341350700	<b>413</b>	<b>331</b>	<b>309</b>	28-5x56	11	5x62	800	50	8BGA	420	–	70	73
IN2ZLF345450700	<b>454</b>	<b>364</b>	<b>340</b>	31-5x62	11	31-5x62	800	50	8BGA	490	–	71	78
IN2ZLF349550700	<b>495</b>	<b>397</b>	<b>371</b>	33-5x66	11	6x62	800	50	8BGA	505	–	71	78
IN2ZLF353650700	<b>536</b>	<b>430</b>	<b>402</b>	36-5x72	11	31-6x62	2x630	25	8BGA	640	–	94	85
IN2ZLF357850700	<b>578</b>	<b>463</b>	<b>433</b>	39-5x78	11	7x62	2x630	25	8BGA	660	–	94	85
IN2ZLF361950700	<b>619</b>	<b>496</b>	<b>464</b>	42-5x84	11	31-7x62	2x630	25	8BGA	700	–	94	85
IN2ZLF366050700	<b>660</b>	<b>530</b>	<b>495</b>	45-5x90	11	8x62	2x630	25	8BGA	720	–	94	85
IN2ZLF370150700	<b>701</b>	<b>563</b>	<b>526</b>	48-5x96	11	31-8x62	2x630	25	8BGA	740	–	90	93
IN2ZLF374350700	<b>743</b>	<b>596</b>	<b>557</b>	51-5x102	11	9x62	2x800	50	8BGA	760	–	90	93
IN2ZLF378450700	<b>784</b>	<b>628</b>	<b>587</b>	53-5x106	11	31-9x62	2x800	50	8BGA	820	–	90	93
IN2ZLF382550700	<b>825</b>	<b>662</b>	<b>619</b>	56-5x112	11	10x62	2x800	50	8BGA	840	–	90	93
IN2ZLF390850700	<b>908</b>	<b>730</b>	<b>682</b>	62-5x124	11	11x62	2x800	50	8BGA	980	–	91	98
IN2ZLF399050700	<b>990</b>	<b>796</b>	<b>744</b>	67-5x134	11	12x62	2x800	50	8BGA	1010	–	91	98

1. MULTImatic of several columns have a disconnecter and a cable entry for each column.

2. Other values upon request.

3. For part numbers contact us.

# VP20 Racks MINIrack | MULTIrack

U <sub>e</sub>	U <sub>N</sub>	U <sub>MAX</sub> *	f	THD <sub>I</sub> %	THD <sub>I</sub> %**
400-415V	460V	500V	50Hz	≤27%	≤90%

\* Maximum admissible value according to IEC 60831-1.

\*\* Attention: in this conditions of load network harmonic amplification phenomena is possible.

## Generalities

- Special contactors with damping resistors to limit capacitors inrush current (AC6b).
- FS17 450/750V self-extinguish cable according to EN 50525 - EN 50575 - EN 50575/A1.
- Fuses with high breaking power NH00-gG.
- CRM25 single phase self-healing metallized polypropylene capacitor with increased thickness and U<sub>N</sub>=460V rated voltage.
- Discharge devices.

Racks can be used as spare parts in ICAR power factor correction systems properly maintained and in suitably ventilated / conditioned third-party electrical panels (max internal temperature 55°C).

## Technical characteristics

Rated operational voltage	U <sub>e</sub> =400-415V
Rated frequency	50Hz
Max current overload I <sub>n</sub> (rack)	1,3 I <sub>n</sub>
Max current overload I <sub>n</sub> (capacitors @40°C)	1,3 I <sub>n</sub> (continuous) 2 I <sub>n</sub> (x500s every 60 minutes) 3 I <sub>n</sub> (x180s every 60 minutes) 4 I <sub>n</sub> (x90s every 60 minutes) 5 I <sub>n</sub> (x50s every 60 minutes)
Max overload V <sub>n</sub> (rack)	1,1xU <sub>e</sub>
Max overload V <sub>n</sub> (capacitors)	3xU <sub>N</sub> (for 1 minute)
Insulation voltage	690V
Temperature class (rack)	-5/+40°C
Temperature class (capacitors)	-25/+70°C
Discharge device	mounted on each bank
Installation	indoor
Service	continuous
Internal connection	delta
Total losses	~ 2W/kvar
Inner surface finish	zinc passivation
Standards (bank)	IEC 61439-1/2, IEC 61921
Standards (capacitors)	IEC 60831-1/2

Part number	Power [kvar]			Steps U <sub>e</sub> =400V	Weight	Dimensions
	U <sub>N</sub> =550V	U <sub>e</sub> =415V	U <sub>e</sub> =400V	[A]	[kg]	(see chap. 5)

### MINIrack

IW2ZLF175050000	<b>7.5</b>	<b>6</b>	<b>5.6</b>	5.6	10	110
IW2ZLF215050000	<b>15</b>	<b>12</b>	<b>11.2</b>	11.2	11	110
IW2ZLF222550000	<b>22.5</b>	<b>18</b>	<b>16.8</b>	5.6-11.2	13	110
IW2ZLF230050000	<b>30</b>	<b>24</b>	<b>22.4</b>	2x11.2	14	110
IW2ZLF237550000	<b>37.5</b>	<b>32</b>	<b>30</b>	5.6-2x11.2	16	110

### MULTIrack

IX2ZLF241250000	<b>41.25</b>	<b>33</b>	<b>31</b>	2.8-5x5.6	19	120
IX2ZLF282550000	<b>82.5</b>	<b>70</b>	<b>62</b>	5.6-5x11.2	27	120



## Detuned fix PFC system MICROfix

U <sub>e</sub>	U <sub>N</sub>	U <sub>MAX</sub> *	f	THDIR%	I <sub>250HZ</sub> %**	THDVR%	f <sub>D</sub>
400V	460V	500V	50Hz	100%	≤25%	≤6%	180Hz

\* Maximum admissible value according to IEC 60831-1.

\*\* Percent current of 5th harmonic.

### Generalities

- Zink-passivated metallic enclosure painted with epossidic dust paint, colour RAL 7035.
- Load-break switch with door interlock.
- Fuses with high breaking power NH00-gG.
- FS17 450/750V self-extinguish cable according to EN 50525 - EN 50575 - EN 50575/A1.
- IP3X protection degree.
- CRM25 single phase self-healing metallized polypropylene capacitor with increased thickness and U<sub>N</sub>=460V rated voltage.
- Discharge resistance.
- Three phase detuning choke with tuning frequency
- f<sub>D</sub>=180Hz (N=3.6-p%=7.7%).

### Technical characteristics

Rated operational voltage	U <sub>e</sub> =400V
Rated frequency	50Hz
Max current overload I <sub>n</sub> (bank)	1,3 I <sub>n</sub>
Max current overload I <sub>n</sub> (capacitors @40°C)	1,3 I <sub>n</sub> (continuous) 2 I <sub>n</sub> (x500s every 60 minutes) 3 I <sub>n</sub> (x180s every 60 minutes) 4 I <sub>n</sub> (x90s every 60 minutes) 5 I <sub>n</sub> (x50s every 60 minutes)
Max overload V <sub>n</sub> (bank)	1,1 x U <sub>e</sub>
Max overload V <sub>n</sub> (capacitors)	3 x U <sub>N</sub> (for 1 minute)
Insulation voltage	690V
Temperature class (bank)	-5/+40°C
Temperature class (capacitors)	-25/+70°C
Discharge device	mounted on each bank
Installation	indoor
Service	continuous
Internal connection	delta
Total losses	~ 6W/kvar
Inner surface finish	zinc passivation
Standards (bank)	IEC 61439-1/2, IEC 61921
Standards (capacitors)	IEC 60831-1/2

Part number	Power [kvar]	LBS	I <sub>cc</sub> <sup>1</sup>	Weight	Dimensions IP40 (see chap. 5)
	U <sub>e</sub> =400V	[A]	[kA]	[kg]	

#### MICROfix

IB5AFF212550988	<b>12.5</b>	40	50	30	45
IB5AFF225050988	<b>25</b>	80	50	36	45
IB5AFF250050988	<b>50</b>	125	50	41	45

1. Other values upon request. Short-circuit withstand current conditioned by the upstream protective device.





FV25

## Detuned automatic PFC system MULTImatic

U <sub>e</sub>	U <sub>N</sub>	U <sub>MAX</sub> *	f	THDIR%	I <sub>250Hz</sub> %**	THDVR%	f <sub>D</sub>
400V	460V	500V	50Hz	100%	≤25%	≤6%	180Hz

\* Maximum admissible value according to IEC 60831-1.

\*\* Percent current of 5th harmonic.

### Generalities

- Zink-passivated metallic enclosure painted with epossidic dust paint, colour RAL 7035.
- Auxiliary transformer to separate power and auxiliary circuit parts (110V).
- Load-break switch with door interlock.
- Contactors for capacitive loads.
- FS17 450/750V self-extinguish cable according to EN 50525 - EN 50575 - EN 50575/A1.
- Microprocessor Power Factor Correction relay.
- Control and protection multimeter MCP5, integrated in 8BGA controller.
- CRM25 single phase self-healing metallized polypropylene capacitor with increased thickness and U<sub>N</sub>=460V rated voltage.
- Three phase detuning choke with tuning frequency f<sub>D</sub>=180Hz (N=3.6-p%=7.7%).

### Technical characteristics

Rated operational voltage	U <sub>e</sub> =400V
Rated frequency	50Hz
Max current overload I <sub>n</sub> (bank)	1,3 I <sub>n</sub>
Max current overload I <sub>n</sub> (capacitors @40°C)	1,3 I <sub>n</sub> (continuous) 2 I <sub>n</sub> (x500s every 60 minutes) 3 I <sub>n</sub> (x180s every 60 minutes) 4 I <sub>n</sub> (x90s every 60 minutes) 5 I <sub>n</sub> (x50s every 60 minutes)
Max overload V <sub>n</sub> (bank)	1,1xU <sub>e</sub>
Max overload V <sub>n</sub> (capacitors)	3xU <sub>N</sub> (for 1 minute)
Insulation voltage	690V
Temperature class (bank)	-5/+40°C
Temperature class (capacitors)	-25/+70°C
Discharge device	mounted on each bank
Installation	indoor
Service	continuous
Internal connection	delta
Total losses	~ 6W/kvar
Inner surface finish	zinc passivation
Standards (bank)	IEC 61439-1/2, IEC 61921
Standards (capacitors)	IEC 60831-1/2

Part number	Power [kvar]	Steps U <sub>e</sub> =400V	Electrical steps number	Banks	LBS <sup>1</sup>	I <sub>cc</sub> <sup>2</sup>	PFC relay	Weight	Dimensions (see chap. 5)	
	U <sub>e</sub> =400V			[kvar]	[A]	[kA]		[kg]	IP4X	IP55 <sup>3</sup>

#### MULTImatic

IN5VFF288050701	<b>88</b>	12,5-25-50	7	37.5-50	250	17	8BGA	250	72	75
IN5VFF313850701	<b>138</b>	12,5-25-2x50	11	37.5-2x50	400	25	8BGA	315	72	75
IN5VFF317550701	<b>175</b>	25-3x50	7	25-3x50	400	25	8BGA	380	74	81
IN5VFF322550701	<b>225</b>	25-4x50	9	25-4x50	630	25	8BGA	460	70	76
IN5VFF327550701	<b>275</b>	25-5x50	11	25-5x50	630	25	8BGA	520	71	77
IN5VFF335050701	<b>350</b>	2x25-2x50-2x100	14	2x25-6x50	2x400	25	8BGA	740	94	85
IN5VFF340050701	<b>400</b>	2x50-3x100	8	8x50	2x630	25	8BGA	800	94	85
IN5VFF345050701	<b>450</b>	50-4x100	9	9x50	2x630	25	8BGA	860	90	96
IN5VFF350050701	<b>500</b>	2x50-4x100	10	10x50	2x630	25	8BGA	920	90	96
IN5VFF355050701	<b>550</b>	50-5x100	11	11x50	2x800	50	8BGA	980	91	95
IN5VFF360050701	<b>600</b>	2x50-3x100-200	12	12x50	2x800	50	8BGA	1040	91	95
IN5VFF365050701	<b>650</b>	50-4x100-200	13	13x50	3x630	25	8BGA	1330	101	103
IN5VFF370050701	<b>700</b>	2x50-2x100-2x200	14	14x50	3x630	25	8BGA	1355	101	103
IN5VFF375050701	<b>750</b>	50-3x100-2x200	15	15x50	3x630	25	8BGA	1380	101	103
IN5VFF380050701	<b>800</b>	2x50-100-3x200	16	16x50	3x800	50	8BGA	1495	102	104
IN5VFF385050701	<b>850</b>	3x50-3x100-2x200	17	17x50	3x800	50	8BGA	1525	102	104
IN5VFF390050701	<b>900</b>	3x100-3x200	9	18x50	3x800	50	8BGA	1560	102	104

1. MULTImatic of several columns have a disconnector and a cable entry for each column.

2. Other values upon request.

3. For part numbers contact us.



## Detuned racks MULTIrack

U <sub>e</sub>	U <sub>N</sub>	U <sub>MAX</sub> *	f	THDIR%	I <sub>250HZ</sub> %**	THDVR%	f <sub>D</sub>
400V	460V	500V	50Hz	100%	≤25%	≤6%	180Hz

\* Maximum admissible value according to IEC 60831-1.

\*\* Percent current of 5th harmonic.

### Generalities

- Contactors for capacitive loads.
- FS17 450/750V self-extinguish cable according to EN 50525 - EN 50575 - EN 50575/A1.
- CRM25 single phase self-healing metallized polypropylene capacitor with increased thickness and U<sub>N</sub>=460V rated voltage.
- Discharge devices.
- Three phase detuning choke with tuning frequency f<sub>D</sub>=180Hz (N=3.6-p%=7.7%).

Racks can be used as spare parts in ICAR power factor correction systems properly maintained and in suitably ventilated / conditioned third-party electrical panels (max internal temperature 55°C).

### Technical characteristics

Rated operational voltage	U <sub>e</sub> =400V
Rated frequency	50Hz
Max current overload I <sub>n</sub> (rack)	1,3 I <sub>n</sub>
Max current overload I <sub>n</sub> (capacitors @40°C)	1,3 I <sub>n</sub> (continuous) 2 I <sub>n</sub> (x500s every 60 minutes) 3 I <sub>n</sub> (x180s every 60 minutes) 4 I <sub>n</sub> (x90s every 60 minutes) 5 I <sub>n</sub> (x50s every 60 minutes)
Max overload V <sub>n</sub> (rack)	1,1 x U <sub>e</sub>
Max overload V <sub>n</sub> (capacitors)	3 x U <sub>N</sub> (for 1 minute)
Insulation voltage	690V
Temperature class (rack)	-5/+40°C
Temperature class (capacitors)	-25/+70°C
Discharge device	mounted on each bank
Installation	indoor
Service	continuous
Internal connection	delta
Total losses	~ 6W/kvar
Inner surface finish	zinc passivation
Standards (bank)	IEC 61439-1/2, IEC 61921
Standards (capacitors)	IEC 60831-1/2

Part number	Power [kvar]	Steps U <sub>e</sub> =400V	Weight	Dimensions
	U <sub>e</sub> =400V	[A]	[kg]	(see chap. 5)

#### MULTIrack

IX5VFF225050010	<b>25</b>	25	32	130
IX5VFF237550010	<b>37.5</b>	12.5-25	35	130
IX5VFF250050010	<b>50</b>	50	46	130
IX5VFF250050560	<b>50</b>	10-40	56	130

# FV25V Detuned automatic PFC system

## MULTImatic

U <sub>e</sub>	U <sub>N</sub>	U <sub>MAX</sub> *	f	THDIR%	I <sub>250HZ</sub> %**	THDVR%	f <sub>D</sub>
400V	460V	500V	50Hz	100%	≤25%	≤8%	180Hz

\* Maximum admissible value according to IEC 60831-1.

\*\* Percent current of 5th harmonic.

## Generalities

- Zink-passivated metallic enclosure painted with epossidic dust paint, colour RAL 7035.
- Auxiliary transformer to separate power and auxiliary circuit parts (110V).
- Load-break switch with door interlock.
- Contactors for capacitive loads.
- FS17 450/750V self-extinguish cable according to EN 50525 - EN 50575 - EN 50575/A1.
- Microprocessor Power Factor Correction relay.
- Control and protection multimeter MCP5, integrated in 8BGA controller.
- CRM25 single phase self-healing metallized polypropylene capacitor with increased thickness and U<sub>N</sub>=460V rated voltage.
- High Linearity three phase copper detuning choke with tuning frequency f<sub>D</sub>=180Hz (N=3.6-p%=7.7%).

## Technical characteristics

Rated operational voltage	U <sub>e</sub> =400V
Rated frequency	50Hz
Max current overload I <sub>n</sub> (bank)	1,3 I <sub>n</sub>
Max current overload I <sub>n</sub> (capacitors @40°C)	1,3 I <sub>n</sub> (continuous) 2 I <sub>n</sub> (x500s every 60 minutes) 3 I <sub>n</sub> (x180s every 60 minutes) 4 I <sub>n</sub> (x90s every 60 minutes) 5 I <sub>n</sub> (x50s every 60 minutes)
Max overload V <sub>n</sub> (bank)	1,1xU <sub>e</sub>
Max overload V <sub>n</sub> (capacitors)	3xU <sub>N</sub> (for 1 minute)
Insulation voltage	690V
Temperature class (bank)	-5/+40°C
Temperature class (capacitors)	-25/+70°C
Discharge device	mounted on each bank
Installation	indoor
Service	continuous
Internal connection	delta
Total losses	~ 6W/kvar
Inner surface finish	zinc passivation
Standards (bank)	IEC 61439-1/2, IEC 61921
Standards (capacitors)	IEC 60831-1/2

Part number	Power [kvar]	Steps U <sub>e</sub> =400V	Electrical steps number	Banks	LBS <sup>1</sup>	I <sub>cc</sub> <sup>2</sup>	PFC relay	Weight	Dimensions (see chap. 5)	
	U <sub>e</sub> =400V			[kvar]	[A]	[kA]		[kg]	IP4X	IP55 <sup>3</sup>

### MULTImatic

IN5ZFF288050703	<b>88</b>	12,5-25-50	7	37.5-50	250	17	8BGA	250	72	75
IN5ZFF313850703	<b>138</b>	12,5-25-2x50	11	37.5-2x50	400	25	8BGA	315	72	75
IN5ZFF317550703	<b>175</b>	25-3x50	7	25-3x50	400	25	8BGA	380	74	81
IN5ZFF322550703	<b>225</b>	25-4x50	9	25-4x50	630	25	8BGA	460	70	76
IN5ZFF327550703	<b>275</b>	25-5x50	11	25-5x50	630	25	8BGA	520	71	77
IN5ZFF335050703	<b>350</b>	2x25-2x50-2x100	14	2x25-6x50	2x400	25	8BGA	740	94	85
IN5ZFF340050703	<b>400</b>	2x50-3x100	8	8x50	2x630	25	8BGA	800	94	85
IN5ZFF345050703	<b>450</b>	50-4x100	9	9x50	2x630	25	8BGA	860	90	96
IN5ZFF350050703	<b>500</b>	2x50-4x100	10	10x50	2x630	25	8BGA	920	90	96
IN5ZFF355050703	<b>550</b>	50-5x100	11	11x50	2x800	50	8BGA	980	91	95
IN5ZFF360050703	<b>600</b>	2x50-3x100-200	12	12x50	2x800	50	8BGA	1040	91	95

1. MULTImatic of several columns have a disconnecter and a cable entry for each column.

2. Other values upon request.

3. For part numbers contact us.

# FV25V Detuned racks

## MULTItrack

U <sub>e</sub>	U <sub>N</sub>	U <sub>MAX</sub> *	f	THDIR%	I <sub>250HZ</sub> %**	THDVR%	f <sub>D</sub>
400V	460V	500V	50Hz	100%	≤25%	≤8%	180Hz

\* Maximum admissible value according to IEC 60831-1.

\*\* Percent current of 5th harmonic.

## Generalities

- Contactors for capacitive loads.
- FS17 450/750V self-extinguish cable according to EN 50525 - EN 50575 - EN 50575/A1.
- CRM25 single phase self-healing metallized polypropylene capacitor with increased thickness and U<sub>N</sub>=460V rated voltage.
- Discharge devices.
- High Linearity three phase copper detuning choke with
- tuning frequency f<sub>D</sub>=180Hz (N=3.6-p%=7.7%).

Racks can be used as spare parts in ICAR power factor correction systems properly maintained and in suitably ventilated / conditioned third-party electrical panels (max internal temperature 55°C).

## Technical characteristics

Rated operational voltage	U <sub>e</sub> =400V
Rated frequency	50Hz
Max current overload I <sub>n</sub> (rack)	1,3 I <sub>n</sub>
Max current overload I <sub>n</sub> (capacitors @40°C)	1,3 I <sub>n</sub> (continuous) 2 I <sub>n</sub> (x500s every 60 minutes) 3 I <sub>n</sub> (x180s every 60 minutes) 4 I <sub>n</sub> (x90s every 60 minutes) 5 I <sub>n</sub> (x50s every 60 minutes)
Max overload V <sub>n</sub> (rack)	1,1xU <sub>e</sub>
Max overload V <sub>n</sub> (capacitors)	3xU <sub>N</sub> (for 1 minute)
Insulation voltage	690V
Temperature class (rack)	-5/+40°C
Temperature class (capacitors)	-25/+70°C
Discharge device	mounted on each bank
Installation	indoor
Service	continuous
Internal connection	delta
Total losses	~ 6W/kvar
Inner surface finish	zinc passivation
Standards (bank)	IEC 61439-1/2, IEC 61921
Standards (capacitors)	IEC 60831-1/2

Part number	Power [kvar]	Steps U <sub>e</sub> =400V	Weight	Dimensions
	U <sub>e</sub> =400V	[A]	[kg]	(see chap. 5)

### MULTItrack

IX5ZFF250050526	<b>50</b>	50	46	130
-----------------	-----------	----	----	-----



FV35

## Detuned automatic PFC system MULTImatic

U <sub>e</sub>	U <sub>N</sub>	U <sub>MAX</sub> *	f	THDIR%	I <sub>250HZ</sub> %**	THDVR%	f <sub>D</sub>
400V	550V	600V	50Hz	100%	≤25%	≤6%	135Hz

\* Maximum admissible value according to IEC 60831-1.

\*\* Percent current of 5th harmonic.

### Generalities

- Zink-passivated metallic enclosure painted with epossidic dust paint, colour RAL 7035.
- Auxiliary transformer to separate power and auxiliary circuit parts (110V).
- Load-break switch with door interlock.
- Contactors for capacitive loads.
- FS17 450/750V self-extinguish cable according to EN 50525 - EN 50575 - EN 50575/A1.
- Microprocessor Power Factor Correction relay.
- Control and protection multimeter MCP5, integrated in 8BGA controller.
- CRM25 single phase self-healing metallized polypropylene capacitor with increased thickness and U<sub>N</sub>=460V rated voltage.
- Three phase detuning choke with tuning frequency f<sub>D</sub>=135Hz (N=2.7-p%=13.7%).

### Technical characteristics

Rated operational voltage	U <sub>e</sub> =400V
Rated frequency	50Hz
Max current overload I <sub>n</sub> (bank)	1,3 I <sub>n</sub>
Max current overload I <sub>n</sub> (capacitors @40°C)	1,3 I <sub>n</sub> (continuous) 2 I <sub>n</sub> (x500s every 60 minutes) 3 I <sub>n</sub> (x180s every 60 minutes) 4 I <sub>n</sub> (x90s every 60 minutes) 5 I <sub>n</sub> (x50s every 60 minutes)
Max overload V <sub>n</sub> (bank)	1,1xU <sub>e</sub>
Max overload V <sub>n</sub> (capacitors)	3xU <sub>N</sub> (for 1 minute)
Insulation voltage	690V
Temperature class (bank)	-5/+40°C
Temperature class (capacitors)	-25/+70°C
Discharge device	mounted on each bank
Installation	indoor
Service	continuous
Internal connection	delta
Total losses	~ 6W/kvar
Inner surface finish	zinc passivation
Standards (bank)	IEC 61439-1/2, IEC 61921
Standards (capacitors)	IEC 60831-1/2

Part number	Power [kvar]	Steps U <sub>e</sub> =400V	Electrical steps number	Banks	LBS <sup>1</sup>	I <sub>cc</sub> <sup>2</sup>	PFC relay	Weight	Dimensions (see chap. 5)	
	U <sub>e</sub> =400V			[kvar]	[A]	[kA]		[kg]	IP4X	IP55 <sup>3</sup>

#### MULTImatic

IN5LFF260050702	<b>60</b>	20-40	3	20-40	250	17	8BGA	250	72	75
IN5LFF310050702	<b>100</b>	20-2x40	5	20-2x40	250	17	8BGA	315	72	75
IN5LFF314050702	<b>140</b>	20-3x40	7	20-3x40	400	25	8BGA	380	74	81
IN5LFF320050702	<b>200</b>	5x40	5	5x40	630	25	8BGA	460	70	76
IN5LFF324050702	<b>240</b>	6x40	6	6x40	630	25	8BGA	520	71	77
IN5LFF328050702	<b>280</b>	40-3x80	7	7x40	2x400	25	8BGA	740	94	85
IN5LFF332050702	<b>320</b>	2x40-3x80	8	8x40	2x630	25	8BGA	800	94	85
IN5LFF336050702	<b>360</b>	40-4x80	9	9x40	2x630	25	8BGA	860	90	96
IN5LFF340050702	<b>400</b>	2x40-4x80	10	10x40	2x630	25	8BGA	920	90	96
IN5LFF344050702	<b>440</b>	40-5x80	11	11x40	2x630	25	8BGA	980	91	95
IN5LFF348050702	<b>480</b>	2x40-3x80-160	12	12x40	2x630	25	8BGA	1040	91	95

1. MULTImatic of several columns have a disconnecter and a cable entry for each column.

2. Other values upon request.

3. For part numbers contact us.





## Detuned racks MULTIrack

U <sub>e</sub>	U <sub>N</sub>	U <sub>MAX</sub> *	f	THDIR%	I <sub>250HZ</sub> %**	THDVR%	f <sub>D</sub>
400V	550V	600V	50Hz	100%	≤25%	≤6%	135Hz

\* Maximum admissible value according to IEC 60831-1.

\*\* Percent current of 5th harmonic.

### Generalities

- Contactors for capacitive loads.
- FS17 450/750V self-extinguish cable according to EN 50525 - EN 50575 - EN 50575/A1.
- CRM25 single phase self-healing metallized polypropylene capacitor with increased thickness and U<sub>N</sub>=550V rated voltage.
- Discharge devices.
- Three phase detuning choke with tuning frequency
- f<sub>D</sub>=135Hz (N=2.7-p%=13.7%).

Racks can be used as spare parts in ICAR power factor correction systems properly maintained and in suitably ventilated / conditioned third-party electrical panels (max internal temperature 55°C).

### Technical characteristics

Rated operational voltage	U <sub>e</sub> =400V
Rated frequency	50Hz
Max current overload I <sub>n</sub> (rack)	1,3 I <sub>n</sub>
Max current overload I <sub>n</sub> (capacitors @40°C)	1,3 I <sub>n</sub> (continuous) 2 I <sub>n</sub> (x500s every 60 minutes) 3 I <sub>n</sub> (x180s every 60 minutes) 4 I <sub>n</sub> (x90s every 60 minutes) 5 I <sub>n</sub> (x50s every 60 minutes)
Max overload V <sub>n</sub> (rack)	1,1 x U <sub>e</sub>
Max overload V <sub>n</sub> (capacitors)	3 x U <sub>N</sub> (for 1 minute)
Insulation voltage	690V
Temperature class (rack)	-5/+40°C
Temperature class (capacitors)	-25/+70°C
Discharge device	mounted on each bank
Installation	indoor
Service	continuous
Internal connection	delta
Total losses	~ 6W/kvar
Inner surface finish	zinc passivation
Standards (bank)	IEC 61439-1/2, IEC 61921
Standards (capacitors)	IEC 60831-1/2

Part number	Power [kvar]	Steps U <sub>e</sub> =400V	Weight	Dimensions
	U <sub>e</sub> =400V	[A]	[kg]	(see chap. 5)

#### MULTIrack

IX5LFF220050009	<b>20</b>	20	38	130
IX5LFF240050009	<b>40</b>	40	62	130



# REACTIVE POWER REGULATOR

The reactive power regulator is, together with the capacitors and reactors (in detuned filter cabinets), the key component of the automatic power factor correction system

It is in fact the “intelligent” element, responsible for the verification of the power factor of the load, in function of which controls the switching on and off of the capacitors batteries in order to maintain the power factor of the system beyond the target.

The reactive power regulators RPC used in ICAR branded automatic power factor correction systems are designed to provide the desired power factor while minimizing the wearing on the banks of capacitors, accurate and reliable in measuring and control functions are simple and intuitive in installation and consultation.

By purchasing a branded ICAR automatic power factor correction system you receive it ready for commissioning. In fact, the controller is already set, you just need to connect it to the line CT and set the value of the primary current (for 7MGA and 8MGA controllers only, it will also be necessary to set the language and the type of system if single-phase or three-phase). The controller automatically recognizes the current direction of the CT secondary, to correct any wiring errors.

The flexibility of our regulators allows you to modify all the parameters to customize its operation to fit the actual characteristics of the system to be corrected (threshold power factor, sensitivity of step switching, reconnecting time of the steps, presence of photovoltaics, etc.).

As described below, the regulators offer important features as for the maintenance and management of the power factor correction bank, aimed at identifying and solving problems, which could lead to its damage with consequent life expectancy reduction

System	Regulator
MICROmatic	RPC 5LGA
MINImatic	RPC 5LGA / RPC 7MGA
MIDImatic	RPC 8LGA / RPC 8MGA
MIDImatic (with detuning reactor)	RPC 8BGA + MCP5
MULTImatic	RPC 8BGA + MCP5 (optional)
MULTImatic (with detuning reactor)	RPC 8BGA + MCP5

The 7MGA controller is perfectly interchangeable with the 5LGA controller, as is the 8MGA controller with the 8LGA controller. The measurement, calculation, and protection functions are identical for all four models so that optimum operation is always guaranteed.



RPC 5LGA



RPC 7MGA



RPC 8LGA




RPC 8MGA



RPC 8BGA

## Reactive power regulators RPC 5LGA and RPC 8LGA

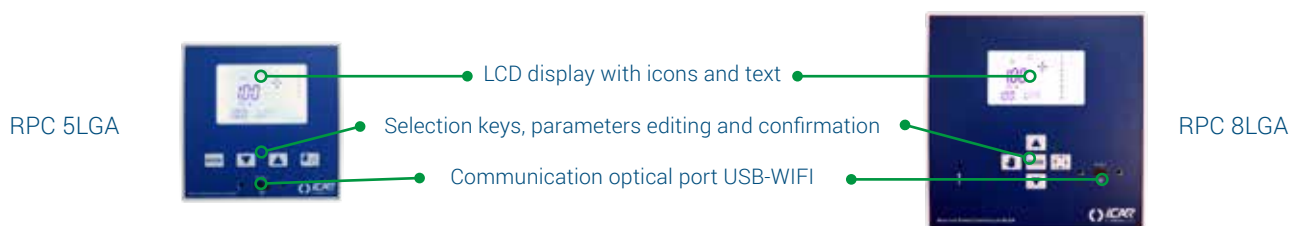

The reactive power regulator RPC 5LGA equips MICROMatic and MINImatic automatic power factor correction systems, while the new regulator RPC 8LGA equips MIDImatic. Both are managed by a microprocessor and offer many features maintaining a simple user interface locally or from a PC.

They are characterized by a large LCD display with text messages (in 6 languages: ITA, ENG, FRA, SPA, POR, GER) and icons for quick and intuitive navigation.

The regulators are very flexible: they are in fact able to adjust the power factor between 0.5 inductive and 0.5 capacitive, to operating with power from 100 to 440 VAC, to run on the 4 quadrants for cogeneration installations, to accept in Input CT secondary 5A or 1A.

The regulators have standard temperature control and the ability to configure one of the available relays for activating visual alarms sound at a distance; also control the distortion of current and voltage.

Regulators RPC 5LGA-8LGA can operate in automatic or manual mode: in the first case in complete autonomy by switching batteries available up to the desired power factor; in the second case it will be the operator to force the insertion and disconnection of the battery: the regulator still oversee operations to prevent potential damage to the capacitors (for example by assessing compliance of discharge times before a subsequent insertion).

Data sheet	RPC 5LGA	RPC 8LGA
Control	microprocessor	
Auxiliary supply voltage	100÷440Vac	
Frequency	50Hz/60Hz	
Voltage measuring input	100÷600V	
Current measuring input	5A (1A programmable)	
Current reading range	from 25mA to 6A (from 25mA to 1.2A)	
Automatic current way sensing	yes	
Operation in systems with cogeneration	yes	
Power consumption	9,5VA	
Output relay	5A - 250Vac	
Cosφ adjustment	from 0,5 ind. to 0,5 cap.	
Step switching time	1s ÷ 1000s	
Alarm relay	yes	
Degree of protection	IP54 on front, IP20 at terminals	
Operating temperature	from -20°C to +60°C	
Storage temperature	from -30°C to + 80°C	
Front optical port	for communication USB or WIFI with dedicated accessories	
Compliance with the standards	IEC 61010-1; IEC 61000-6-2; IEC 61000-6-4; UL508; CSA C22-2 nr.14	
Output relay number	5 (expandable up to 7)	8 (expandable up to 12)
Dimensions	96x96mm	144x144mm
Weight	0,35kg	0,65kg
Part number	6CF46411050	6CF025



### Measurement functions

Regulators RPC 5LGA and 8LGA provide many standard measurements in order to check and monitor the correct electrical and temperature conditions of the power factor correction system.

Display shows the following values: power factor, voltage, current, delta kvar (reactive power missing to reach the target power factor), average weekly power factor, total harmonic distortion of the current system (THDI<sub>R</sub>%) with detailed harmonic for harmonic from 2nd to 15th, total harmonic distortion of the voltage (THD<sub>V</sub>%) with detail for harmonic from 2nd to 15th, total harmonic distortion in the current % (THDI<sub>C</sub>%) capacitor, temperature.

The controller stores and makes available for consultation the maximum value of each of these variables, to evaluate the most severe stress suffered by the automatic power factor correction since the last reset: the temperature, the voltage and the total harmonic distortion have a strong impact on the capacitors as if they hold more than the nominal values can drastically reduce the service life.

### Alarms

The RPC regulators offer many different alarms as standard, which help in the correct operation of the system.

The alarms are set to the following values:

- Under-compensation: the alarm is activated if, with all the steps of power factor correction switched on, the power factor is lower than the desired value.
- Over-compensation: the alarm is activated if, with all the steps of power factor correction switched off, the power factor is greater than the desired value.
- Minimum and maximum current: to assess the condition of the system load.
- Minimum and maximum voltage: to evaluate the stresses due to the variations of the supply voltage.
- Maximum THD%: to assess the pollution of network as regards to harmonic current.
- Maximum temperature in the enclosure: to monitor the capacitor climatic conditions.
- Short voltage interruptions.

Alarms are programmable (enable, threshold, time of activation / deactivation).

### Display Indications

The LCD display icons and text provides the following information for quick identification of the state of the system:

- Operating mode automatic/manual.
- Status of each battery (on / off).
- Recognition power factor inductive / capacitive.
- Type of value displayed.
- Active alarm code, and explanatory text (in a language of choice among the 6 available: ITA, ENG, FRA, SPA, POR, GER).

### Safety

The RPC 5LGA and 8LGA controllers have passwords to prevent not authorized access. A backup copy of the factory settings is always available in memory.

### Contacts

The regulators RPC 5LGA and 8LGA have power contacts for controlling the steps, to control the eventual cooling fan and for the activation of alarms to distance; contacts are NO and have a range of 5A at 250Vac or 1.5A at 440Vac. A contact is in exchange for alarm functions (NO or NC).

### Additional module

The regulator RPC 5LGA has the ability to accommodate, in the back slot, an additional module.

The regulator RPC 8LGA has two rear slots to accommodate up to two additional modules.


Once installed an additional module, the controller recognizes and activates the menu for its programming. Additional modules can be installed even in the bank already in service. Slots for additional module may be already used to implement necessary functions to the context in which the controller is mounted.

If you decide to add a module to an already operating, ensure that there is an available slot.

Module	
OUT2NO	two digital outputs module for additional step control (two 5A 250Vac relays)
COM232	isolated RS232 interface
COM485	isolated RS485 interface
WEBETH	Ethernet interface (only for RPC 8LGA)



## Reactive power regulators RPC 7MGA and RPC 8MGA

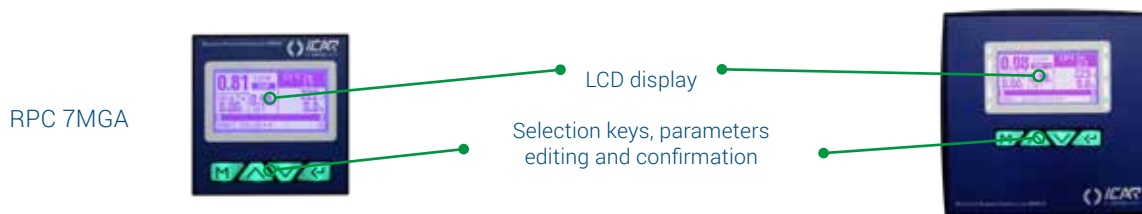

The reactive power regulator RPC 7MGA equips MINImatic automatic power factor correction systems, while the regulator RPC 8MGA equips MIDImatic.

Both are managed by a microprocessor and offer many features maintaining a simple user interface locally or from a PC using a rear RS485 serial port with which they are equipped as standard.

They are characterized by a large LCD display with text messages (in 5 languages: ITA, ENG, FRA, ESP, RUS) for quick and intuitive navigation.

The regulators are very flexible: they are in fact able to adjust the power factor between 0.85 inductive and 0.9 capacitive, to operating with auxiliary supply 110Vac or 230Vac, to run on the 4 quadrants for cogeneration installations, to accept in Input CT secondary 5A or 1A.

The regulators have standard temperature control and the ability to configure one of the available relays for activating visual alarms sound at a distance; also control the distortion of current and voltage.

Regulators RPC 7MGA-8MGA can operate in automatic or manual mode: in the first case in complete autonomy by switching batteries available up to the desired power factor; in the second case it will be the operator to force the insertion and disconnection of the battery: the regulator still oversee operations to prevent potential damage to the capacitors (for example by assessing compliance of discharge times before a subsequent insertion).

Data sheet	RPC 7MGA	RPC 8MGA
Control	microprocessor	
Auxiliary supply voltage	110Vac or 230Vac	
Frequency	50Hz/60Hz	
Voltage measuring input	10÷460V	
Current measuring input	5A (1A programmable)	
Current reading range	from 20mA to 5,5A	
Current way sensing	yes (with alarm in case of inversion)	
Operation in systems with cogeneration	yes	
Power consumption	5,8VA	6,1VA
Output relay	8A - 250Vac - AC1	
Cosφ adjustment	from 0,85 ind. to 0,9 cap.	
Step switching time	5s ÷ 600s	
Alarm relay	yes	
Degree of protection	IP41 on front, IP20 at terminals	
Operating temperature	from -20°C to +60°C	
Storage temperature	from -30°C to + 70°C	
Rear RS485 serial port	for communication with dedicated accessories	
Compliance with the standards	IEC 61010-1; IEC 61010-2-030; IEC 61326-1	
Output relay number	7	8
Dimensions	96x96mm	144x144mm
Weight	0,52kg	0,65kg
Part number	6CF033	6CF034

### Measurement functions

Regulators RPC 7MGA and 8MGA provide many standard measurements in order to check and monitor the correct electrical and temperature conditions of the power factor correction system.

Display shows the following values: power factor, voltage, current, delta kvar (reactive power missing to reach the target power factor), average weekly power factor, total harmonic distortion of the current system (THDiR%) with detailed harmonic for harmonic from 2nd to 64th, total harmonic distortion of the voltage (THDvR%) with detail for harmonic from 2nd to 64th, total harmonic distortion in the current % (THDiC%) capacitor, temperature, active power, reactive power, apparent power, active energy, reactive energy and apparent energy.

The controller stores and makes available for consultation the maximum value of: voltage, current, THDv%, THDi%, temperature. This makes it possible to evaluate the heaviest stress suffered by the automatic power factor correction system. Temperature, voltage and harmonic distortion rate have a strong impact on capacitors because if they remain above their rated values, they can drastically reduce the service life.

### Alarms

The RPC regulators offer many different alarms as standard, which help in the correct operation of the system.

The alarms are set to the following values:

- Under-compensation: the alarm is activated if, with all the steps of power factor correction switched on, the power factor is lower than the desired value.
- Over-compensation: the alarm is activated if, with all the steps of power factor correction switched off, the power factor is greater than the desired value.
- Minimum and maximum current: to assess the condition of the system load.
- Minimum and maximum voltage: to evaluate the stresses due to the variations of the supply voltage.
- Maximum THD%: to assess the pollution of network as regards to harmonic current.
- Maximum temperature in the enclosure: to monitor the capacitor climatic conditions.
- Short voltage interruptions.
- Reversed CT (in the case of a current transformer connection error).

Alarms are programmable (enable, threshold, time of activation / deactivation).

### Display Indications

The LCD display provides the following information for quick identification of the state of the system:

- Operating mode automatic/manual.
- Status of each battery (on / off).
- Recognition power factor inductive / capacitive.
- System voltage.
- System current.
- Average weekly power factor.
- Percentage overload of capacitors.
- Internal temperature of the equipment.
- Active alarm via red keypad illumination and explanatory text on the relevant alarm page (in a language to be chosen from the 5 available).

### Safety

The RPC 7MGA and 8MGA controllers have passwords to prevent not authorized access.

### Contacts

The regulators RPC 7MGA and 8MGA have power contacts for controlling the steps, to control the eventual cooling fan and for the activation of alarms to distance; contacts are NO and have a range of 8A at 250Vac. A contact is in exchange for alarm functions (NO or NC).

# Reactive power regulators RPC 8BGA



The RPC 8BGA reactive power regulator equips MULTImatic automatic power factor correction systems. It is a very innovative controller, with exclusive features:

- High electrical performance
- Extended Capabilities
- High readability graphical display
- Advanced communication
- Upgradability, even after installation
- Powerful supervision software
- Choice language (10 languages available on board)

More details below, referring to the following page tables and manuals for further information.

## High electrical performance



The 8BGA controller is equipped with powerful hardware, which allows a considerable electrical performances: it can be connected to the CT secondary 5A or 1A, it can work on networks with voltages from 100 to 600Vac with a measuring range from 75Vac to 760Vac, it can be connected to a single CT (typical configuration of the power factor correction) or three-CTs (for a more accurate measurement of the power factor, and this fact makes the 8BGA controller to refocus and to be a multimeter as well).

## Extended Capabilities

The 8BGA reactive power regulator is controlled by a powerful microprocessor that allows a set of new functions to solve problems even in complex plant. 8BGA can work master-slave functions, handles up to 10 languages simultaneously, can be used in MV systems managing the transformation ratio of the VT, it can support multiple inputs and outputs via optional modules, it can handle target cos phi from 0.5 inductive to 0.5 capacitive. 8BGA can build a network of 4 wired units (one master three slaves) to be able to handle up to 32 steps of power factor correction in a consistent and uniform way.

## Graphical display with high readability

Forget the regulators with small displays and difficult to read: 8BGA will amaze you with its display matrix graphic LCD 128x80 pixels. The detail and sharpness allow intuitive navigation between the different menus, represented with text and icons.

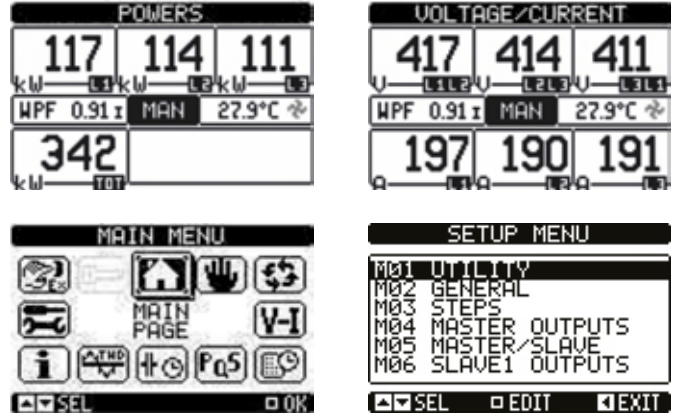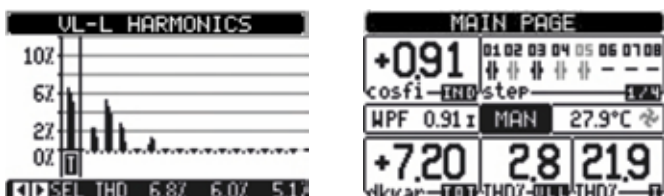

## Advanced communication

8BGA born to be a regulator able to communicate in a manner in line with the latest technology: Ethernet, RS485, USB, WIFI. Now you can see the information of the company cos phi, without having to go in front of the regulator. Now you can consult it by a PC. The information about the cos phi is important, because it impacts heavily on the company's income statement.

## Evolvutivity

The "basic" 8BGA regulator can be enhanced with up to four additional modules "plug and play" which greatly expands its performance. It is possible to add additional control relays (up to a total of 16), even for a static control (thyristors), digital and analog inputs, analog outputs, communication modules. Your controller can become a small PLC, and the PFC system can become a point of data aggregation, for remote communication.

## Measurement functions and help to maintain

8BGA is a real evolved multimeter, thanks also to the graphic display of excellent readability and to the powerful microprocessor. The measured parameters are the basic ones (cosφ, PF, V, I, P, Q, A, Ea, Er) with the addition of the distortion of the voltage and current (THD, histogram of the value of each harmonic, waveform graphic visualization). If 8BGA is connected to three CT, the harmonic analysis is detailed for each phase, in order to identify any anomalies of single phase loads. 8BGA measure and count values that can help in ruling the PFC (temperature, number of switching of each step). 8BGA also suggests the maintenance to be carried out by means of simple messages on the display. Keep efficient capacitor becomes much easier. 8BGA stores the maximum values of current, voltage, temperature, each associated with the date and time of the event for a better analysis of what happened.

### Alarms

The set of alarms (maximum and minimum voltage, maximum and minimum current, over and undercompensation, overload of the capacitors, maximum temperature, microinterruption) associated with the readability of the messages on the display allows a better understanding of what happened. Even alarm programming (enable / disable, delay, relapse etc.) is easier and faster.

Data sheet	RPC 8BGA
Control	microprocessor
Auxiliary supply voltage	100÷440Vac
Frequency	50Hz/60Hz
Voltage measuring input	100÷600V (-15% / +10%)
Current measuring input	5A (1A programmable)
Current reading range	from 25mA to 6A (from 10mA to 1.2A)
Automatic current way sensing	yes
Operation in systems with cogeneration	yes
Power consumption	12VA (10,5W)
Output relay	5A - 250Vac
Cosφ adjustment	from 0.5 ind. to 0.5 cap. (tan φ da -1.732 a +1.732)
Step switching time	1s ÷ 1000s (20ms with STR4NO module)
Alarm relay	yes
Degree of protection	IP55 on front, IP20 at terminals
Operating temperature	from -30°C to +70°C
Storage temperature	from -30°C to +80°C
Front optical port	for communication USB or WIFI with dedicated accessories
Temperature control	from -30°C to +85°C
Compliance with the standards	IEC 61010-1; IEC 61000-6-2; IEC 61000-6-4; UL508; CSA C22-2 nr.14
Output relay number	8 (expandable up to 16)
Dimensions	144x144mm
Weight	0,98kg
Part number	6CF46411000

## Additional modules

The RPC 8BGA controller accommodates up to 4 additional modules "plug & play". Once you have added an additional module, the controller recognizes and activates the menu for its programming. Additional modules can also be installed retrospectively (consult us).

### Digital inputs and outputs

Questi moduli permettono di potenziare la dotazione di contatti per comando dei gradini a contattori (modulo OUT2NO) o a tiristori (modulo STR4NO) bordo quadro, oppure di aggiungere ingressi e/o uscite digitali/analogiche per acquisizione di grandezze e implementazione di semplici logiche da parte del regolatore.

- **OUT2NO** modulo 2 uscite digitali per comando gradini aggiuntivi (due relè 5A 250 Vac)
- **STR4NO** modulo 4 uscite statiche per comando gradini a tiristori (famiglie SPEED)
- **INP40C** modulo 4 ingressi digitali

### Protection functions

The control and protection module MCP5 allows a more detailed inspection of the electrical parameter and temperature that can damage the capacitors.

Thanks to algorithms particularly suitable for automatic equipment consisting of capacitors and reactors.

- **MCP5** module for protection and control for additional safety of capacitors, especially suitable in the detuned banks

MULTImatic detuned systems are equipped with RPC 8BGA controller with MCP5 module.


This module has very important function: it directly monitors, through two CTs installed inside, the current in the capacitors analyzing the harmonic content.

In case of harmonic content increases (for example, due to the aging of the capacitors) exceeding a certain limit value, the PFC system is taken out of service, excluding the risk of bursting or overcharging of the capacitors.

The MCP5 module allows the harmonic currents affecting the capacitors to be monitored directly on the RPC 8BGA controller screens, as can be seen in the two pictures shown below.

The individual harmonics are kept under control, with the possibility of setting an alarm level and an intervention level on each. The MCP5 module also allows to monitor two additional temperatures in order to avoid excessive overheating even inside the panel.

Without this functionality, the regulator would carry out the evaluation of the harmonic content with greater difficulty and less precision.

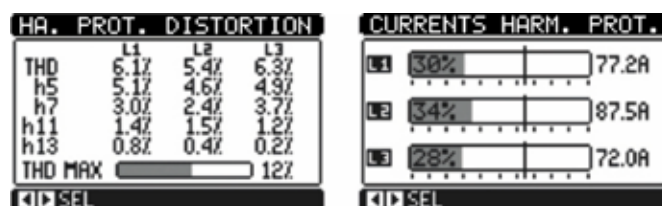

Analisi della corrente armonica assorbita dai condensatori, in valore percentuale, dettagliato armonica per armonica, e assoluto.

### Communication functions

RPC 8BGA regulator is very powerful in terms of communication. The modules dedicated to these functions allow multiple solutions to remotely control the power factor system and all other variables measured, calculated or obtained from the instrument.

Module	
COM232	isolated RS232 interface
COM485	isolated RS485 interface
WEBETH	Ethernet interface
COMPRO	isolated Profibus-DP interface
CX01	cable connection from the RPC 8BGA optical port to the USB port of the computer for programming, downloading / uploading data, diagnostics etc
CX02	device to connect the optical port in the RPC 8BGA via WIFI: for programming, downloading / uploading data, diagnostics etc









# DIMENSIONS

The following pages show the dimensions of the equipment in this catalog, identified with the respective numerical code. This page shows the total dimensions, for a first evaluation of the space occupied. The dimensions in the table include (where present) handles, exchangers, turrets, etc. For more details, consult the individual drawings.


	Dimensional number	Dimensions [mm]		
		W	D	H
SUPERriphaso	<b>21</b>	195	89	245
MICROfix	<b>43</b>	310	200	450
	<b>44</b>	430	250	600
	<b>45</b>	550	500	900
MICROmatic	<b>49</b>	460	260	480
	<b>50</b>	610	260	480
MINImatic	<b>55</b>	420	425	745
	<b>56</b>	420	425	965
	<b>57</b>	420	425	1183
	<b>58</b>	420	425	1403
	<b>60<sup>1</sup></b>	600	440	1500
	<b>61<sup>1</sup></b>	600	440	1700
MIDImatic	<b>64</b>	600	690	1835
MULTImatic	<b>70</b>	610	670	2160
	<b>71</b>	610	670	2360
	<b>72</b>	610	670	1760
	<b>73</b>	610	670	2160
	<b>74</b>	610	670	1960
	<b>75</b>	610	777	1760
	<b>76<sup>1</sup></b>	822	670	2160
	<b>77<sup>1</sup></b>	822	670	2360
	<b>78<sup>2</sup></b>	610	777	2360
	<b>80</b>	822	670	1760
	<b>81<sup>2</sup></b>	610	777	1960
	<b>82<sup>1</sup></b>	822	670	1960
	<b>83<sup>2</sup></b>	1220	777	1760
	<b>84<sup>3</sup></b>	1432	777	1760
	<b>85<sup>2</sup></b>	1220	777	1960
	<b>86<sup>3</sup></b>	1432	777	1960
	<b>90</b>	1220	670	2160
	<b>91</b>	1220	670	2360
	<b>92</b>	1220	670	1760
	<b>93</b>	1220	777	2160
	<b>94</b>	1220	670	1960
	<b>95<sup>3</sup></b>	1432	777	2360
	<b>96<sup>3</sup></b>	1432	777	2160
	<b>98<sup>2</sup></b>	1220	777	2360
	<b>101</b>	1830	670	2160
	<b>102</b>	1830	670	2360
	<b>103<sup>3</sup></b>	2042	777	2160
	<b>104<sup>3</sup></b>	2042	777	2360

1. Leave 250mm of free air on each side (consult us).


2. Leave 250mm of free air behind (consult us).

3. Leave 250mm of free air both on the back and on each side (consult us).


21




Max N° of modules in parallel: 6




43

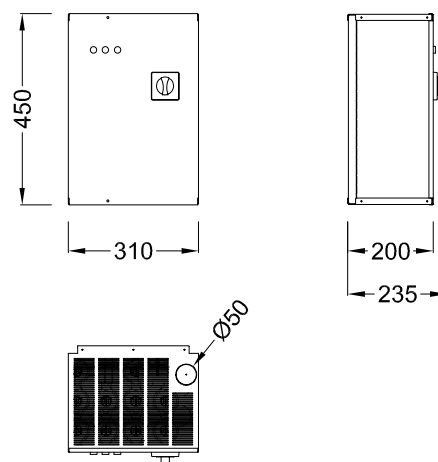


44

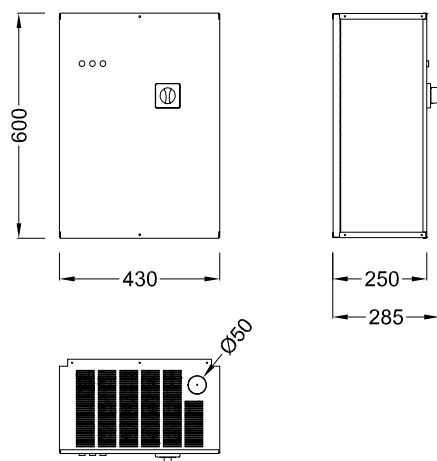


45






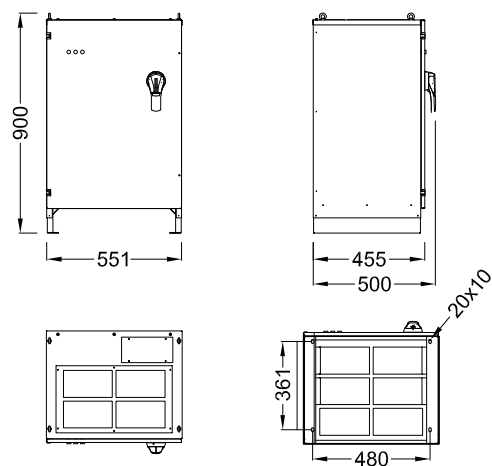


49

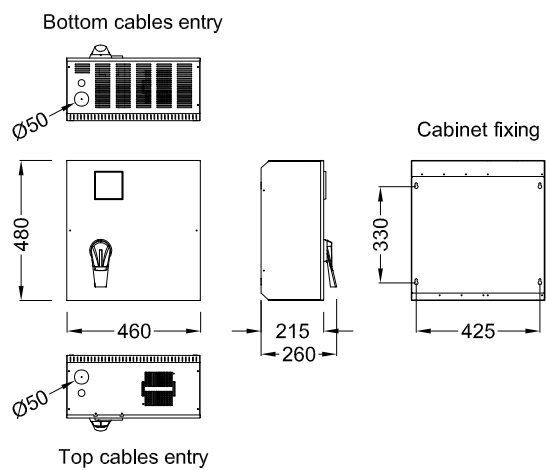


50

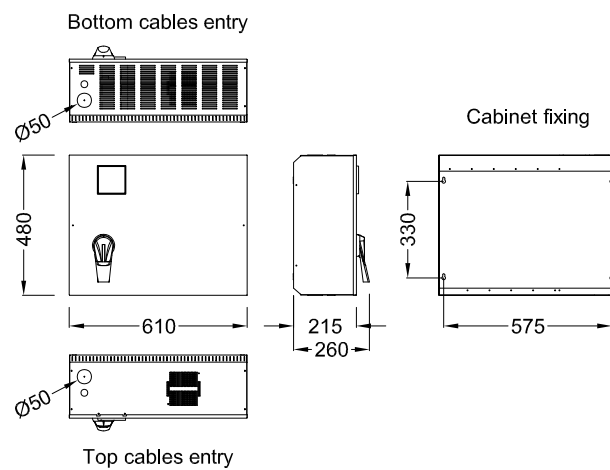


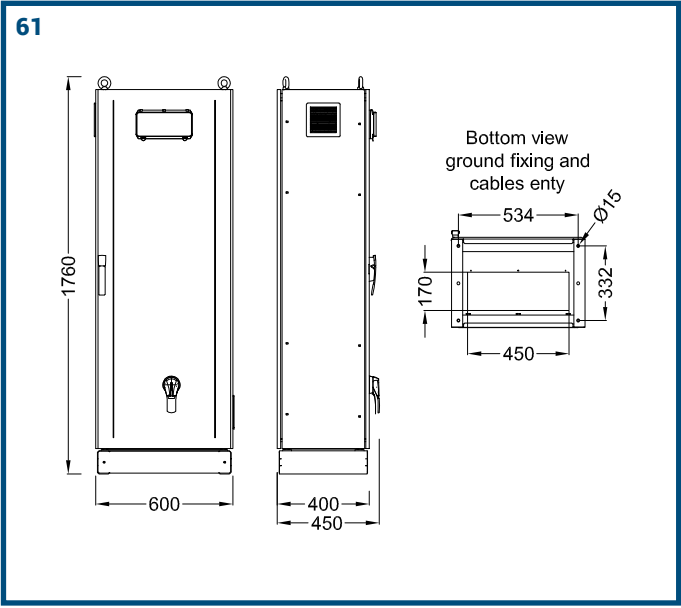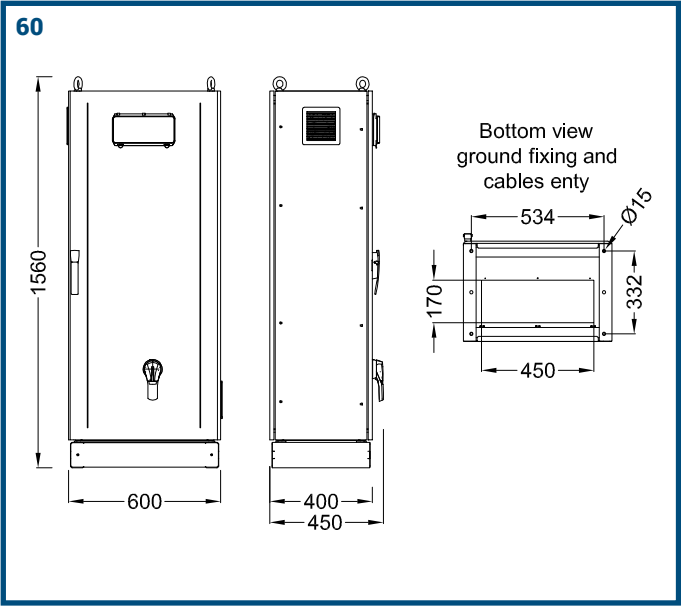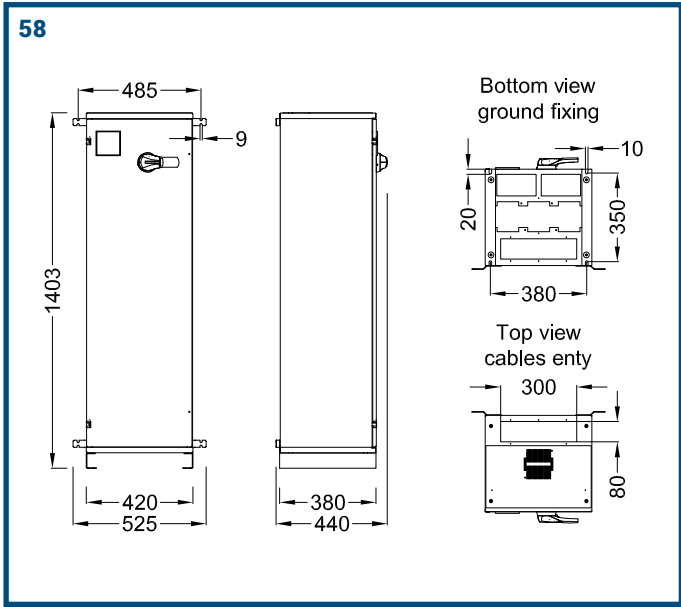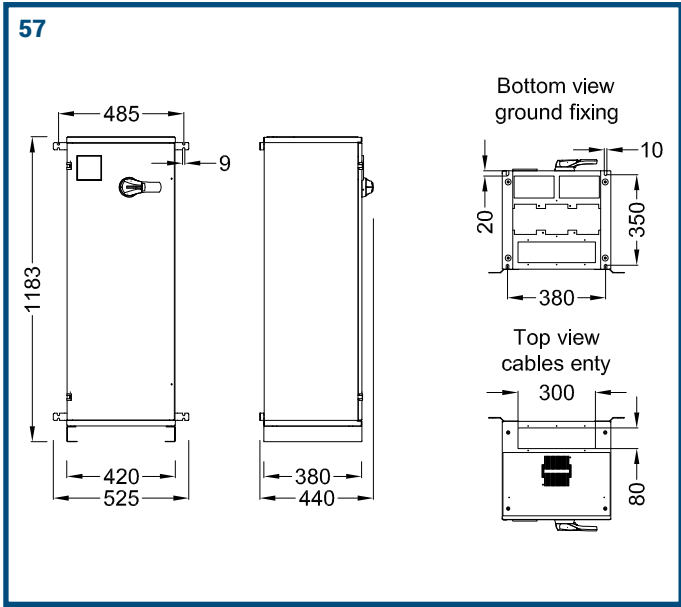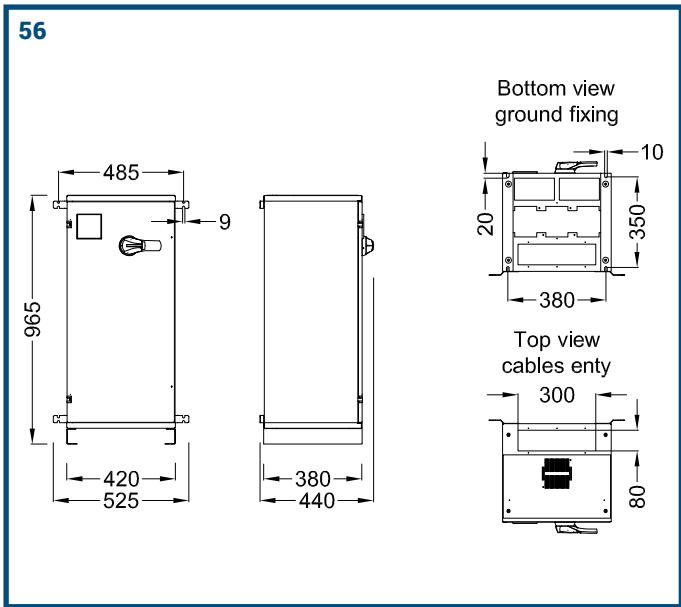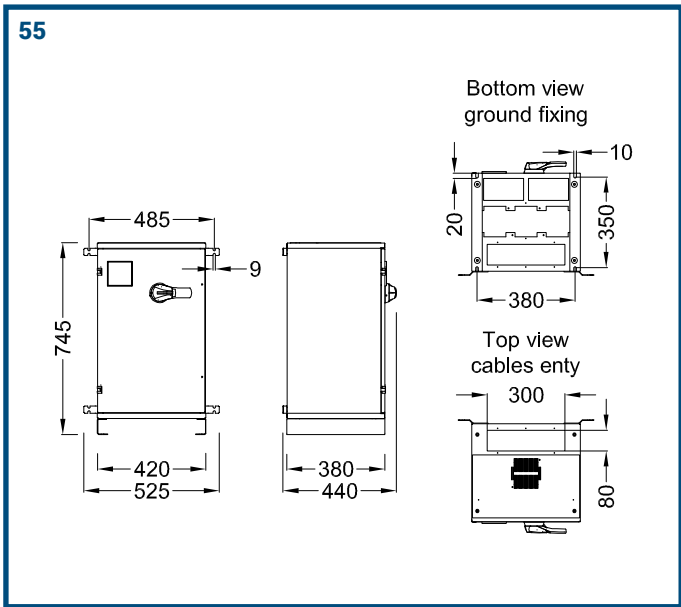


64

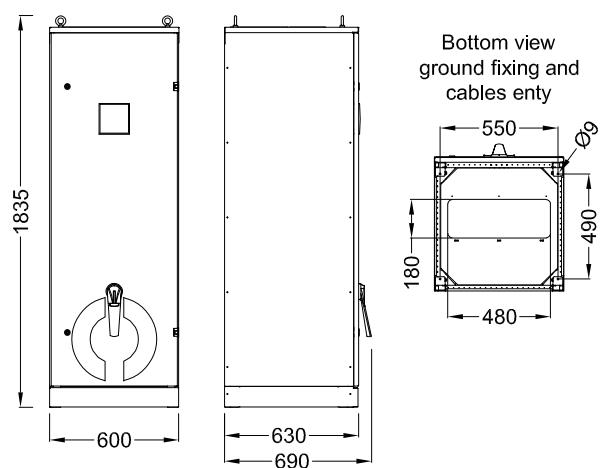


70

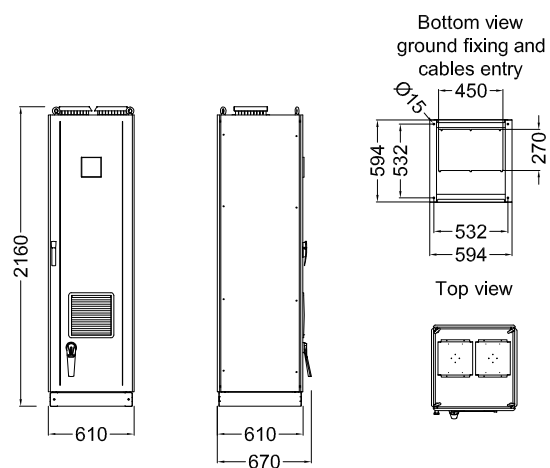


71

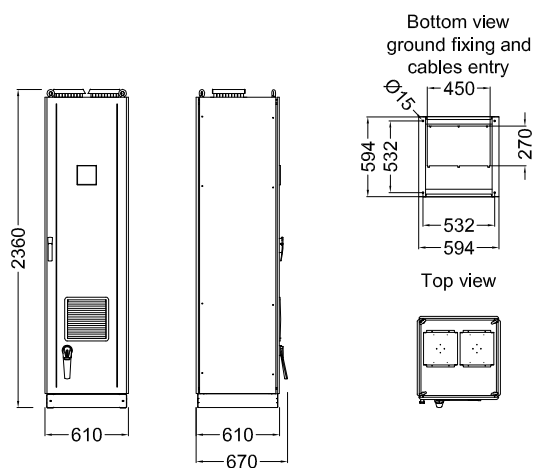


72

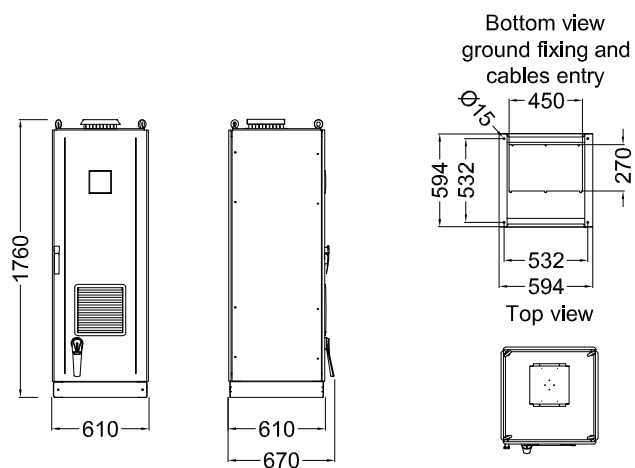

73

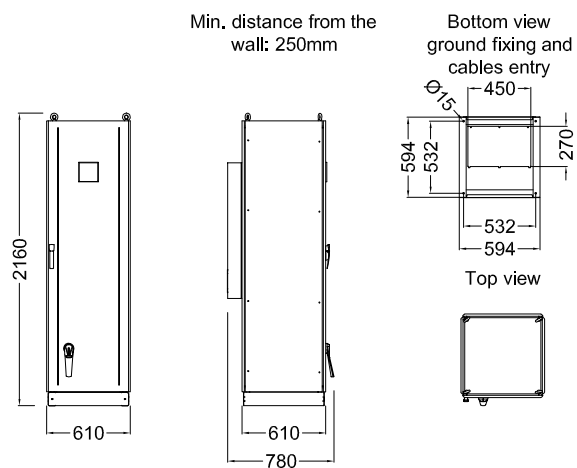

74

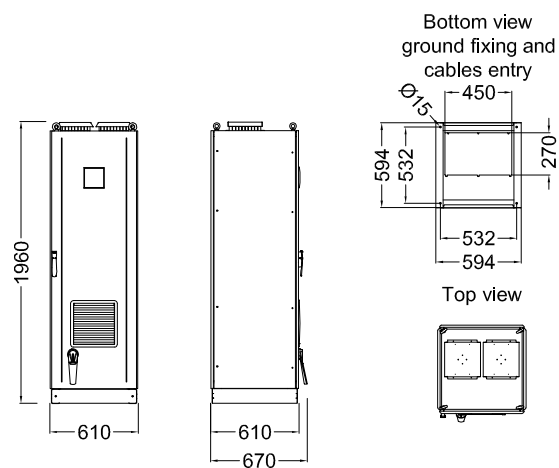




75

Min. distance from the wall: 250mm


Bottom view ground fixing and cables entry

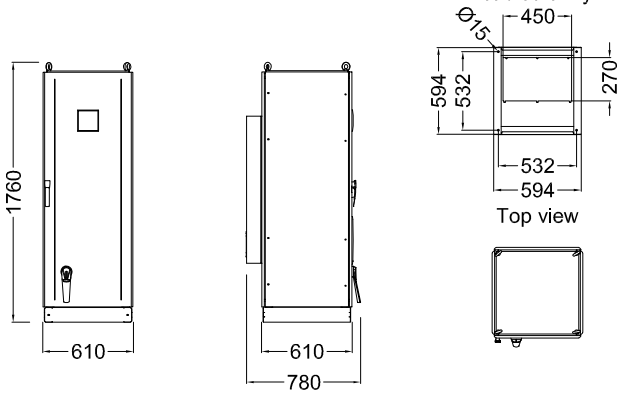

76

Min. distance from the wall: 250mm


Bottom view ground fixing and cables entry

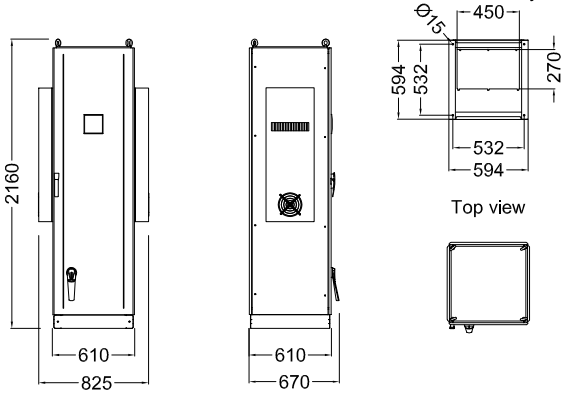

77

Min. distance from the wall: 250mm


Bottom view ground fixing and cables entry

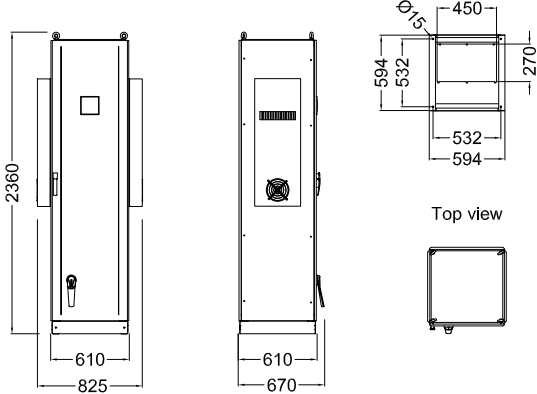

78

Min. distance from the wall: 250mm


Bottom view ground fixing and cables entry

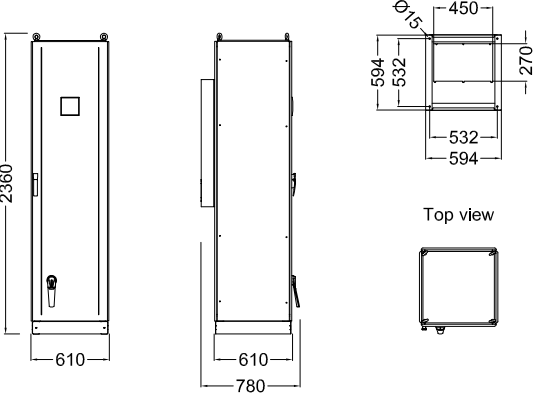

80

Min. distance from the wall: 250mm


Bottom view ground fixing and cables entry

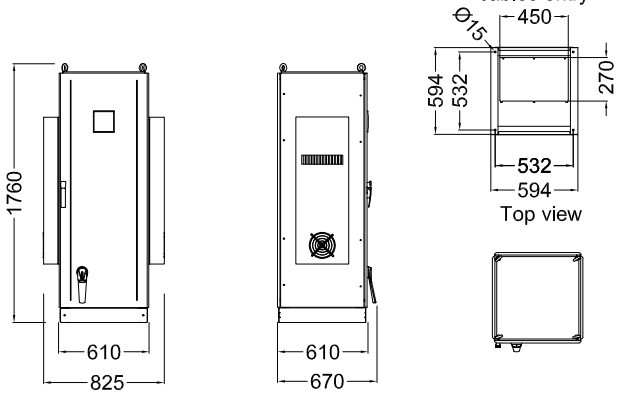

81

Min. distance from the wall: 250mm



Bottom view ground fixing and cables entry

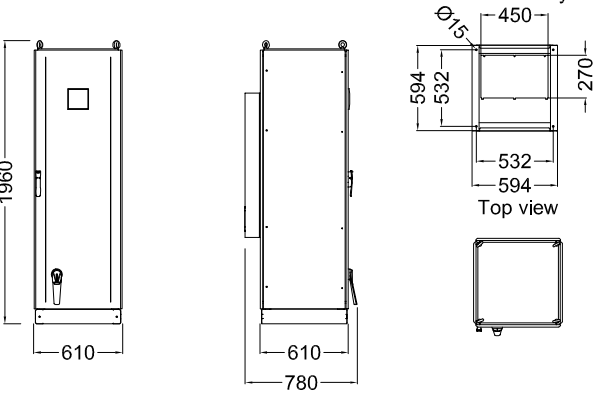




**82**

Min. distance from the wall: 250mm


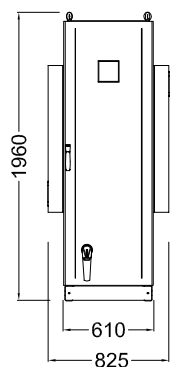


Bottom view  
ground fixing and  
cables entry

Top view


**83**

Min. distance from the wall: 250mm






Bottom view  
ground fixing and  
cables entry

Top view


**84**

Min. distance from the wall: 250mm




Min. distance from the wall: 250mm

Bottom view  
ground fixing and  
cables entry


Top view

**85**

Min. distance from the wall: 250mm




Bottom view  
ground fixing and  
cables entry

Top view





**86**

Min. distance from the wall: 250mm


Min. distance from the wall: 250mm

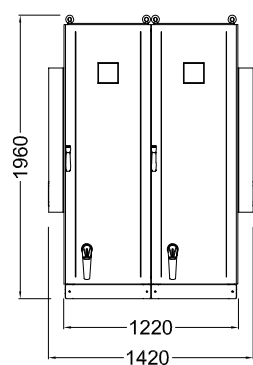Bottom view  
ground fixing and  
cables entry







Top view

**90**Bottom view  
ground fixing and  
cables entry

Top view




Note: MULTImatic in two columns have two disconnectors and require two cable entries.  
For versions with single cable entry, contact us.

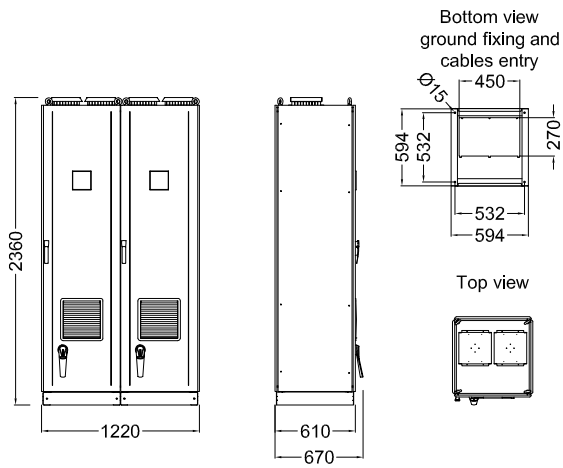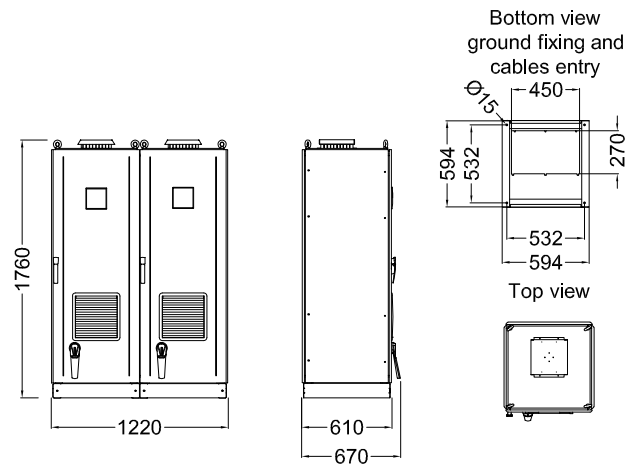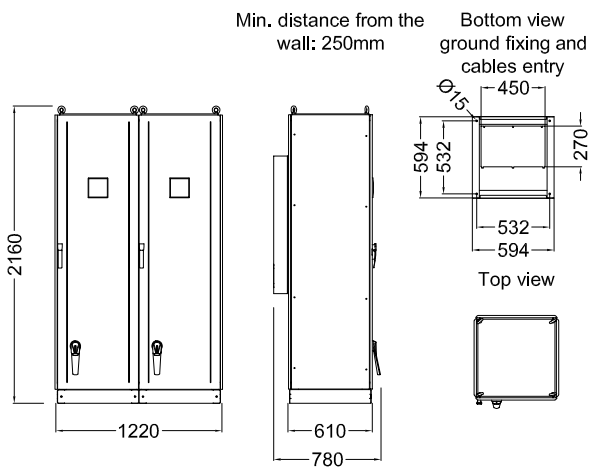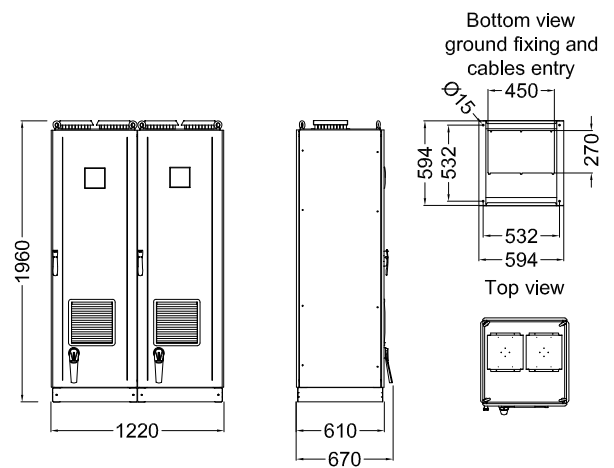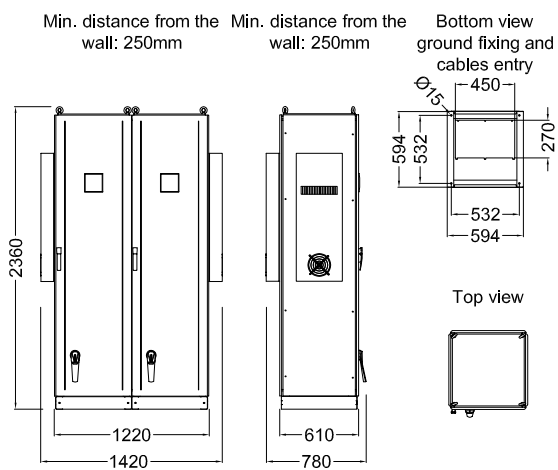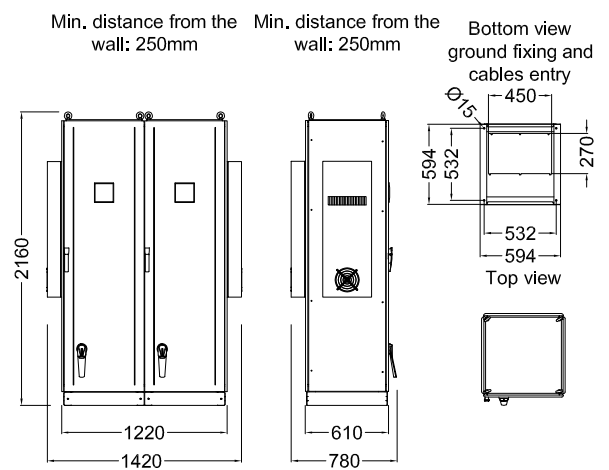
**91****92****93****94****95****96**

Note: MULTImatic in two columns have two disconnectors and require two cable entries.  
For versions with single cable entry, contact us.


98

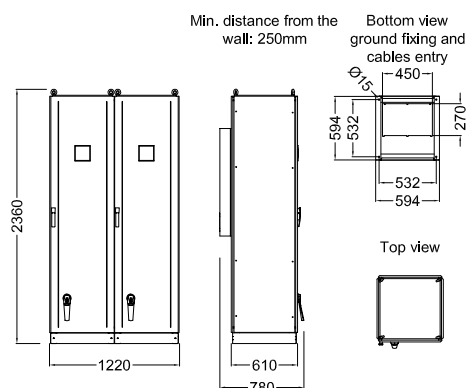


101

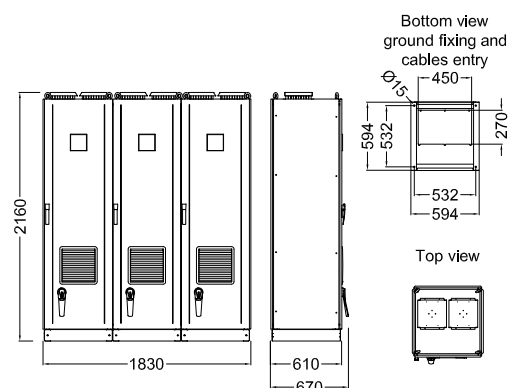


102

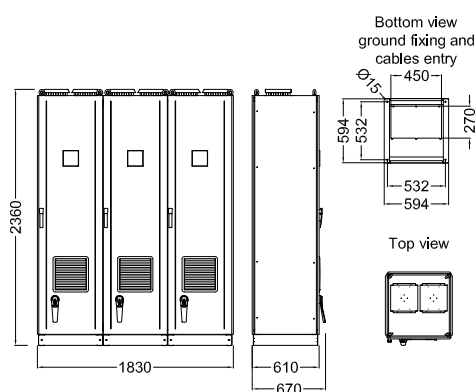


103

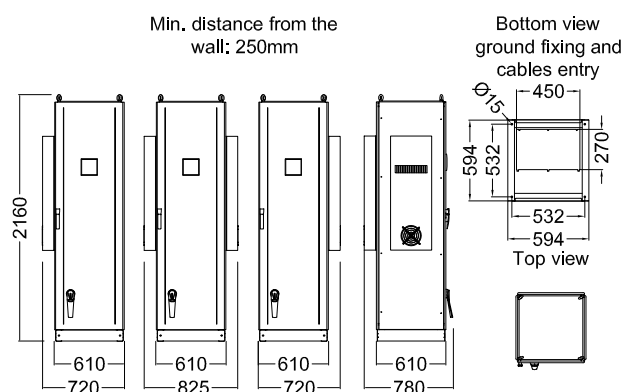

104

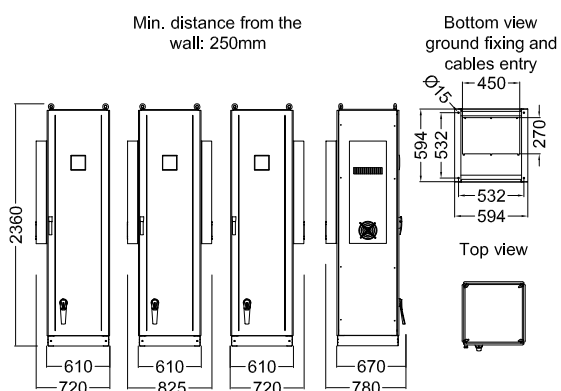


109

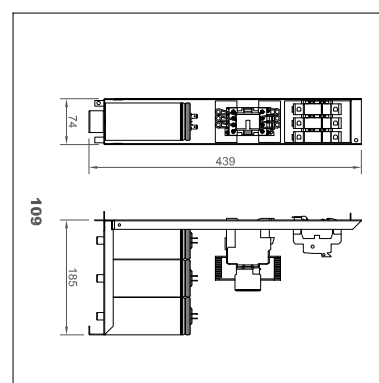


Note: MULTImatic in two columns have two disconnectors and require two cable entries.  
For versions with single cable entry, contact us.


110

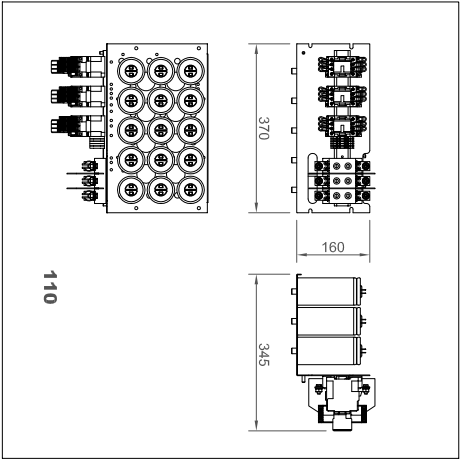


120

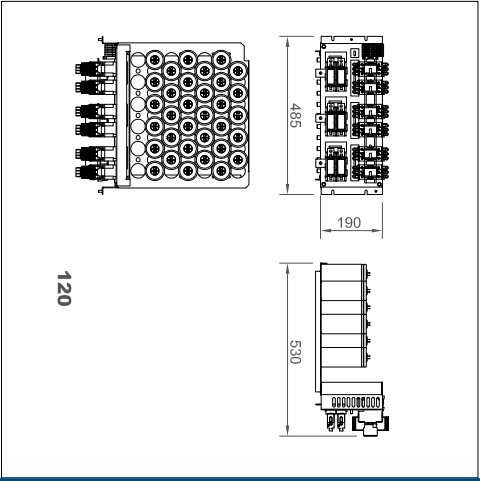


130

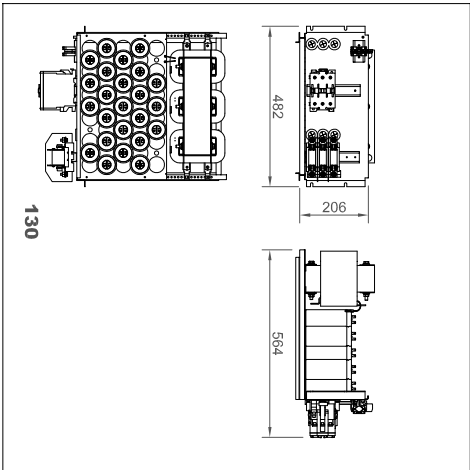


135

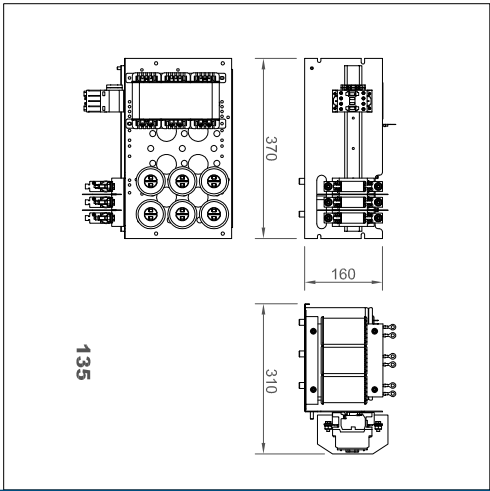

144

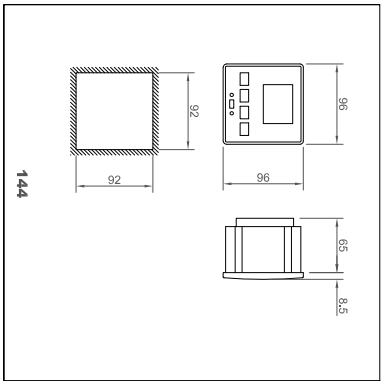


147

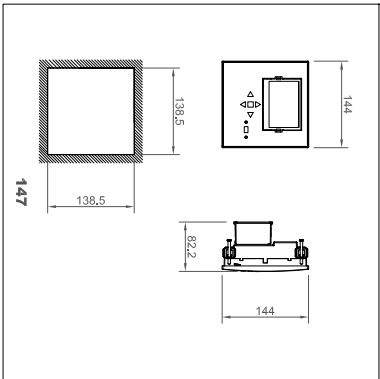

# TECHNICAL NOTES


## Power factor correction: why?

In electrical circuits the current is in phase with the voltage whenever are in presence of resistors, whereas the current is lagging if the load is inductive (motors, transformers with no load conditions), and leading if the load is capacitive (capacitors).

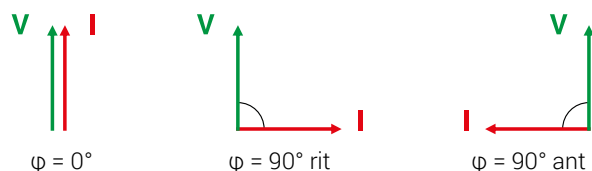

The total absorbed current, for example, by a motor is determined by vector addition of:

- $I_R$  resistive current;
- $I_L$  inductive reactive current.

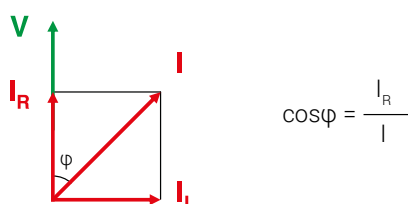


These currents are related to the following powers:

- Active power linked to  $I_R$ ;
- Reactive power linked to  $I_L$ .

The reactive power doesn't produce mechanical work and it is an additional load for the energy supplier.

The parameter that defines the consumption of reactive power is the power factor.

We define power factor the ratio between active power and apparent power:

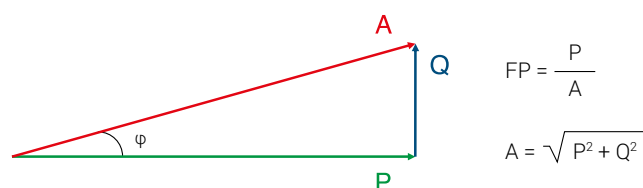

As far as there are not harmonic currents power factor coincides to  $\cos \varphi$  of the angle between current and voltage vectors.

$\cos \varphi$  decreases as the reactive absorbed power increases.

Low  $\cos \varphi$ , has the following disadvantages:

- high power losses in the electrical lines;
- high voltage drop in the electrical lines;
- over sizing of generators, electric lines and transformers.

From this we understand the importance to improve (increase) the power factor.

Capacitors need to obtain this result.


## Power factor correction: how?

By installing a capacitor bank it is possible to reduce the reactive power absorbed by the inductive loads in the system and consequently to improve power factor. It is suitable to have  $\cos \varphi$  a little in excess of 0.95 to avoid paying the penalties provided for by the law.


The choice of the correct power factor correction equipment depends on the type of loads present and by their way of working.

The choice is between individual compensation and central compensation.

- Individual compensation: power factor correction is wired at each single load (i.e. motor terminals).
- Central compensation: there is only one bank of capacitors on the main power distribution switch board or substation.

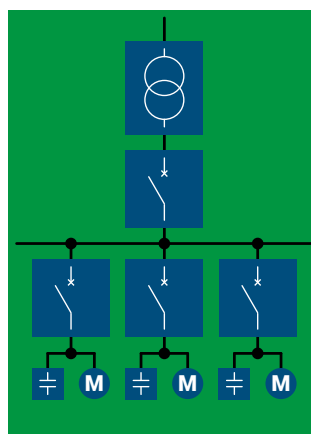

Individual compensation

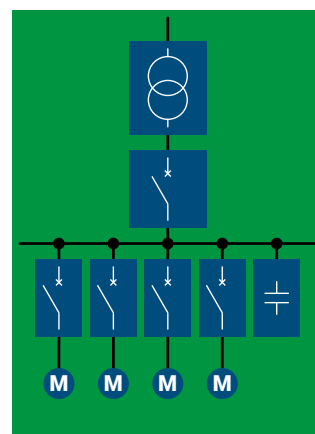

Central compensation

The individual compensation is a simple technical solution: the capacitor and the user equipment follow the same sorts during the daily work, so the regulation of the  $\cos \varphi$  becomes systematic and closely linked to the load. Another great advantage of this type of power factor correction is the simple installation with low costs.

The daily trend of the loads has a fundamental importance for the choice of most suitable power factor correction. In many systems, not all the loads work in the same time and some of them work only a few hours per day. It is clear that the solution of the individual compensation becomes too expensive for the high number of capacitors that have to be installed. Most of these capacitors will not be used for long period of time.

The individual compensation is more effective if the majority of the reactive power is concentrated on a few substations loads that work long period of time. Central compensation is best suited for systems where the load fluctuates throughout the day. If the absorption of reactive power is very variable, it is advisable the use of automatic regulation in preference to fixed capacitors.




## Power factor correction: How many?

The choice of capacitor bank to install in a system is closely depended from:

- $\cos\phi_2$  value that we would obtain;
- $\cos\phi_1$  starting value;
- installed active power.

By the following equation:

$$Q_C = P \cdot (\tan\phi_1 - \tan\phi_2)$$

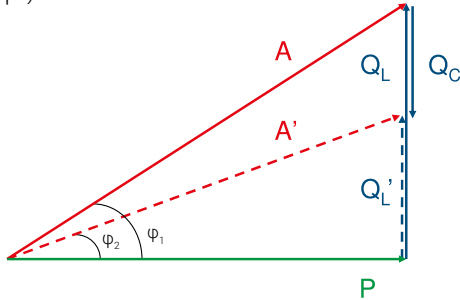

Can be also written  $Q_C = k \cdot P$

where the parameter  $k$  is easily calculated using Table 1 (in APPENDIX).

As example if we have installed a load that absorbs an active power of 300 kW having a power factor 0.7 and we want to increase it until 0.97.

From the table 1 we find:  $k = 0,770$ , and therefore:

$$Q_C = 0,770 \cdot 300 = 231 \text{ kvar}$$

where:

$Q_C$  = required capacitors reactive output (kvar);

$P$  = active power (kW);

$Q_L, Q_L'$  = inductive reactive output before and after the installation of the capacitor bank;

$A, A'$  = apparent power before and after the power factor correction (kVA).

A typical example of power factor correction, sometimes not much considered but surely important, concerns the power factor correction of transformers for the distribution of energy. It is essentially a fixed power factor correction that must compensate for the reactive power absorbed by the transformer in its no load condition (this happens often during the night). The calculation of the needed reactive output is very easy and it bases itself on this equation:

$$Q_C = I_0\% \cdot \frac{A_N}{100}$$

where:

$I_0\%$  = magnetising current of the transformer;

$A_N$  = apparent rated power in kVA of the transformer.

If we don't have these parameters, it is convenient to use the following table:

Transformer power [kVA]	Standard		Low losses	
	Oil [kvar]	Resin [kvar]	Oil [kvar]	Resin [kvar]
10	1	1,5	—	—
20	2	1,7	—	—
50	4	2	—	—
75	5	2,5	—	—
100	5	2,5	1	2
160	7	4	1,5	2,5
200	7,5	5	2	2,5
250	8	7,5	2	3
315	10	7,5	2,5	3,5
400	12,5	8	2,5	4
500	15	10	3	5
630	17,5	12,5	3	6
800	20	15	3,5	6,5
1000	25	17,5	3,5	7
1250	30	20	4	7,5
1600	35	22	4	8
2000	40	25	4,5	8,5
2500	50	35	5	9
3150	60	50	6	10

Another very important example of power factor correction concerns asynchronous three-phase motors that are individually corrected.

The reactive power likely needed is reported on following table:

Motor power		Required reactive power [kvar]				
HP	KW	3000 rpm	1500 rpm	1000 rpm	750 rpm	500 rpm
0,4	0,55	—	—	0,5	0,5	—
1	0,73	0,5	0,5	0,6	0,6	—
2	1,47	0,8	0,8	1	1	—
3	2,21	1	1	1,2	1,6	—
5	3,68	1,6	1,6	2	2,5	—
7	5,15	2	2	2,5	3	—
10	7,36	3	3	4	4	5
15	11	4	5	5	6	6
30	22,1	10	10	10	12	15
50	36,8	15	20	20	25	25
100	73,6	25	30	30	30	40
150	110	30	40	40	50	60
200	147	40	50	50	60	70
250	184	50	60	60	70	80

Be careful: the capacitor output must not be dimensioned too high for individual compensated machines where the capacitor is directly connected with the motor terminals. The capacitor placed in parallel may act as a generator for the motor which will cause serious overvoltages (self-excitation phenomena). In case of wound rotor motor the reactive power of the capacitor bank must be increased by 5%.

## Power factor correction: technical reasons

Recent energy market deregulation, along with new potential energy supplier rising, had lead to many and different type of invoicing which are not very clear in showing Power Factor up. However as energy final price is steady growing, to correct power factor is becoming more and more convenient.

In most of the cases power factor improvement device prime cost is paid back in few months.

Technical-economical advantages of the installation of a capacitor bank are the following:

- decrease of the losses in the network and on the transformers caused by the lower absorbed current;
- decrease of voltage drops on lines;
- optimization of the system sizing.

The current  $I$ , that flows in the system, is calculated by:

$$I = \frac{P}{\sqrt{3} \cdot V \cdot \cos\varphi}$$

where:

$P$  = Active power

$V$  = Nominal voltage

While  $\cos\varphi$  increases, with the same absorbed power we can obtain a reduction in the value of the current and as a consequence the losses in the network and on the transformers are reduced. Therefore we have an important saving on the size of electrical equipment used on a system. The best system sizing has some consequence on the line voltage drop. We can easily see that looking at the following formula:

$$\Delta V = R \cdot \frac{P}{V} + X \cdot \frac{Q}{V}$$

where:

$P$  = Active power on the network (kW)

$Q$  = Reactive power on the network (kvar)

while  $R$  is the cable resistance and  $X$  its reactance ( $R \ll X$ )

The capacitor bank installation reduces  $Q$  so we have a lower voltage drop. If, for a wrong calculation of the installed capacitor bank value, the reactive part of the above equation becomes negative, instead of a reduction of the voltage drop we have an increasing of the voltage at the end of the line (Ferranti Effect) with dangerous consequence for the installed loads.

Some examples clarify the concepts set out above:

$\cos\varphi$	Power loss <sup>1</sup> [kW]	Supplied active power <sup>2</sup> [kW]
0,5	3,2	50
0,6	2,3	60
0,7	1,6	70
0,8	1,3	80
0,9	1	90
1	0	100

1. In function of  $\cos\varphi$ , from a copper cable 3 x 25mm<sup>2</sup> 100m long carrying 40kW at 400Vac.

2. By a 100kVA transformer, in function of  $\cos\varphi$ .

As we can see as the power factor increases we have fewer losses in the network and more active power from the same kVA.


This allows us to optimize on the system sizing.

## Power factor correction: Harmonics in the network

The distortions of the voltage and current waveforms are generated by non-linear loads (inverter, saturated transformers, rectifier, etc.) and produce the following problems:

- on the AC motors we find mechanical vibration that can reduce expected life. The increase of the losses creates overheating with consequent damaging of the insulating materials;
- in transformers they increase the copper and iron losses with possible damaging of the windings. The presence of direct voltage or current could cause the saturation of the cores with consequent increasing of the magnetising current;
- the capacitors suffer from the overheating and the increasing of the voltage that reduce their life.

The waveform of the current (or voltage) generated by a nonlinear load being periodical, could be represented by the sum of many sinusoidal waves (a 50Hz component called fundamental and other components with multiple frequency of the fundamental component so called harmonics).

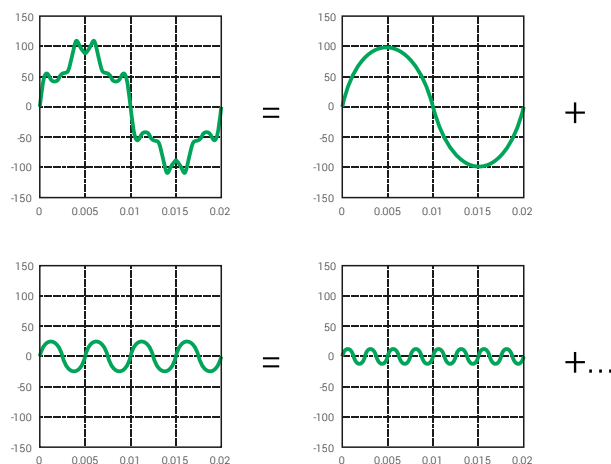


$$I = I_1 + I_2 + I_3 + \dots + I_n$$


It is not advisable to install the power factor correction without considering the harmonic content of a system.

This is because, even if we could manufacture capacitors that can withstand high overloads, capacitors produce an increase of harmonic content, with the negative effects just seen.

We speak about resonance phenomena when an inductive reactance is equal to the capacitive one:

$$2\pi f L = \frac{1}{2\pi f C}$$

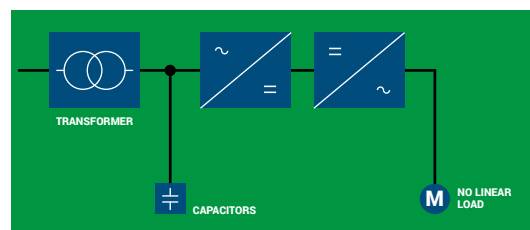

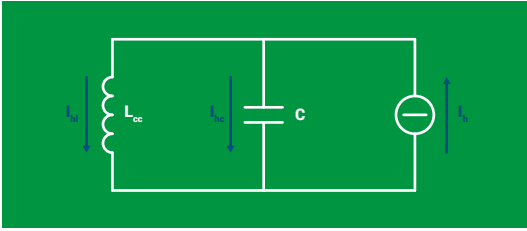

Ideal current generator represents motor as harmonic current components generator  $I_h$ , these are independent from circuit inductance, while LCC is obtainable by capacitor upstream short circuit power (in general it is equal to transformer short-circuit inductance).

The resonance frequency is obtained as follows:

$$N = \sqrt{\frac{S_{cc}}{Q}} \cong \sqrt{\frac{A \cdot 100}{Q \cdot V_{cc}\%}}$$

where:

$S_{cc}$  = short-circuit power of the network (MVA)  
 $Q$  = output of power factor correction bank (kvar)  
 $A$  = rated power transformer (kVA)  
 $V_{cc}\%$  = transformer short-circuit voltage  
 $N$  = resonance harmonic order

In parallel resonance conditions the current and the voltage of the circuit LCC - C are heavily amplified as well as the nearby harmonic currents.



Hereinafter an example:

$A = 630\text{kVA}$  (rated power transformer)  
 $V_{cc}\% = 6$  (transformer short-circuit voltage %)  
 $Q = 300\text{kvar}$  (output of power factor correction bank)

$$N = \sqrt{\frac{A \cdot 100}{Q \cdot V_{cc}\%}} = \sqrt{\frac{630 \cdot 100}{300 \cdot 6}} \cong 6$$

The result shows that in these conditions the system transformer-capacitor bank has the parallel resonance frequency of 300Hz (6x50Hz). This means likely amplification of 5th and 7th harmonic current.

The most convenient solution to avoid this is the detuned filter, formed introducing a filter reactor in series with the capacitors, making this a more complex resonant circuit but with the desired feature of having a resonance frequency below the first existing harmonic.

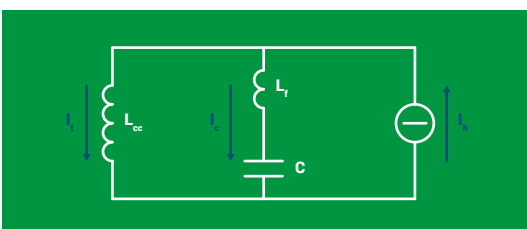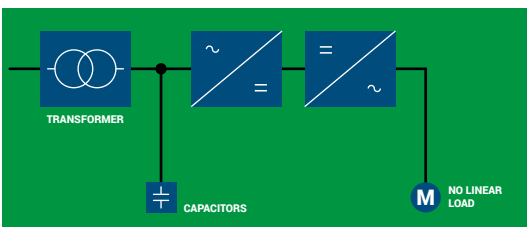

With this type of solution, the parallel resonance frequency is modified from

$$f_{rp} = \frac{1}{2 \cdot \pi \cdot \sqrt{L_{cc} \times C}}$$

to

$$f_{rp} = \frac{1}{2 \cdot \pi \cdot \sqrt{(L_{cc} + L_f) \times C}}$$

Normally the resonance frequency between the capacitor and the series reactance is shifted lower than 250Hz and it is generally between 135Hz and 210Hz. The lower frequencies correspond to higher harmonic loads. The installation of a reactance in series with the capacitor bank produces a series resonance frequency:

$$f_{rs} = \frac{1}{2 \cdot \pi \cdot \sqrt{L_f \times C}}$$

If a harmonic current  $I_h$  with the same frequency of the resonance in series exists, this one will be totally absorbed by the system capacitors - reactors without any effect on the network. The realisation of a tuned passive filter is based on this simple principle.

This application is required when we want the reduction of the total distortion in current (THD) on the system:

$$THD = \frac{\sqrt{I_3^2 + I_5^2 + I_7^2 + \dots + I_n^2}}{I_1}$$

where:

$I_1$  = component at the fundamental frequency (50Hz) of the total harmonic current  
 $I_3 - I_5 - \dots$  = harmonic components at the multiple frequency of the fundamental (150Hz, 250Hz, 350Hz, ...)

The dimensioning of tuned/passive filters is linked to the circuit parameter:

- impedance of the network (attenuation effect less as the short-circuit power on the network increases: in some cases could be useful to add in series with the network a reactance to increase the filtering effect);
- presence of further loads that generate harmonics linked to other nodes on the network;
- capacitor types.

On this last point we have to make some considerations. It is known that the capacitors tend to decrease capacity over time: varying the capacity inevitably varies the resonance series frequency:

$$f_{rs} = \frac{1}{2 \cdot \pi \cdot \sqrt{L_f \times C}}$$

and this drawback can be very dangerous because the system could lead in parallel resonance conditions. In this case, the filter does not absorb more harmonics but even amplifies them. In order to have a constant capacity guarantee over time we need to use another type of capacitors made in bimetalized paper and oil impregnated polypropylene.

In addition to the passive absorption filter realized with capacitors and inductances is possible to eliminate the network harmonics, with another type of absorption filter: the Active Filter.

The operation principle is based on the in-line injection of the same current harmonics produced by nonlinear loads, but out of phase.

## Power factor correction in presence of distorted voltage

In many industrial electrical systems or in the tertiary sector, the presence of non-linear loads (inverter, welding, filament free lamps, computers, drives, etc..) causes a distortion of the current, which is synthesized by the THDI% numeric parameter: if the current is sinusoidal its THDI% is zero, more the current is deformed so much higher is its THDI%.

In electrical currents with very deformed currents, the power factor correction equipment are carried out in a "filter banks" (or "block" or "blocked" or "detuned" if you prefer), or rather with inductors that prevent harmonic current to reach and damage the capacitor.

Usually the supply voltage remains sinusoidal even if a very deformed current flows in the plant; however, if the MV/LV transformer impedance is high, the voltage may also be affected by deformation: this impedance, crossed by a distorted current, will create a voltage drop equally distorted, causing on LV users a non-sinusoidal supply voltage (or with a certain THDVR%).

It is rare that the THDVR% reaches 8% (limit of IEC 50160), this happens for example when the MV/LV transformer is characterized by a high series impedance and/or is overloaded (saturation).

In a plant with distorted voltage there will be problems of various types, depending on the utilities (breakage or malfunction of electronic parts such as relays, plc, controller, computers; production beyond the acceptable tolerances, etc.). Regarding the power factor correction, a high THDVR% creates problems for the blocking reactors used in power factor correction banks. These can saturate and overheat for overload up to be damaged, causing the out of service of the power factor correction bank and/or problems to the capacitors. This will result in an economic loss (payment of penalties for low  $\cos\phi$ ) and technical, because the plant will run through by a higher current, resulting in conductors additional overhead (cables, bars) and the transformer.

For this problem, Ortea Next has developed a dedicated solution: the MULTImatic FV25V (for 400V network) power factor correction range. They are made with metallized polypropylene capacitor with increased thickness with high performance and electronic instrumentation for the electrical parameters control; high linearity reactance allow them to bear up to 8% THDVR continuously.

## Power factor correction in presence of a photovoltaic system in spot trading

If on electrical plant of an industrial user is added a photovoltaic system, the active power drawn from the supply is reduced because of the power supplied by the photovoltaic system and consumed by the plant (consumption).

Therefore, it changes the relationship between reactive power and active energy drawn from the network and, consequently, the power factor is lower than the same system without photovoltaic.

We must therefore pay particular attention to the power factor correction not to have any penalties for low  $\cos\phi$  that could seriously erode the economic benefits of the photovoltaic system.

The power factor correction will be reviewed both for installed capacity, both for construction type. In fact, increasing the power factor corrector power, you will modify the resonance conditions with the MV/LV transformer which supply the system.

When the photovoltaic system has more power than the users one, or if it is possible that power is introduced to the network, the power factor corrector must also be able to run on the four quadrants. The two "standard" quadrants are related to the plant operation as a user that absorbs from the network both active and inductive reactive power, while the two quadrants related on the plant functioning as a generator, it provides the network active power, but it absorbs the inductive reactive power (quadrants of generation).

All Icar by Ortea Next range of  $\cos\phi$  electronic controllers are able to operate in four quadrants, running two different  $\cos\phi$  targets to optimize the system economic performance.

To manage the cogeneration quadrants you can alter some parameters settings. It is advisable to enter a value equal to 1, to optimize the yield of the PFC Bank. Refer to the manuals of the controllers for more details.

To get the maximum benefit in the time allowed by the PFC Bank, we recommend to use metallized polypropylene capacitor with increased thickness.

APPENDIX

Table 1

K factor for turning active power into reactive power to achieve target power factor.

Starting power factor	Target power factor										
	0,90	0,91	0,92	0,93	0,94	0,95	0,96	0,97	0,98	0,99	1,00
0,30	2,695	2,724	2,754	2,785	2,817	2,851	2,888	2,929	2,977	3,037	3,180
0,31	2,583	2,611	2,641	2,672	2,704	2,738	2,775	2,816	2,864	2,924	3,067
0,32	2,476	2,505	2,535	2,565	2,598	2,632	2,669	2,710	2,758	2,818	2,961
0,33	2,376	2,405	2,435	2,465	2,498	2,532	2,569	2,610	2,657	2,718	2,861
0,34	2,282	2,310	2,340	2,371	2,403	2,437	2,474	2,515	2,563	2,623	2,766
0,35	2,192	2,221	2,250	2,281	2,313	2,348	2,385	2,426	2,473	2,534	2,676
0,36	2,107	2,136	2,166	2,196	2,229	2,263	2,300	2,341	2,388	2,449	2,592
0,37	2,027	2,055	2,085	2,116	2,148	2,182	2,219	2,260	2,308	2,368	2,511
0,38	1,950	1,979	2,008	2,039	2,071	2,105	2,143	2,184	2,231	2,292	2,434
0,39	1,877	1,905	1,935	1,966	1,998	2,032	2,069	2,110	2,158	2,219	2,361
0,40	1,807	1,836	1,865	1,896	1,928	1,963	2,000	2,041	2,088	2,149	2,291
0,41	1,740	1,769	1,799	1,829	1,862	1,896	1,933	1,974	2,022	2,082	2,225
0,42	1,676	1,705	1,735	1,766	1,798	1,832	1,869	1,910	1,958	2,018	2,161
0,43	1,615	1,644	1,674	1,704	1,737	1,771	1,808	1,849	1,897	1,957	2,100
0,44	1,557	1,585	1,615	1,646	1,678	1,712	1,749	1,790	1,838	1,898	2,041
0,45	1,500	1,529	1,559	1,589	1,622	1,656	1,693	1,734	1,781	1,842	1,985
0,46	1,446	1,475	1,504	1,535	1,567	1,602	1,639	1,680	1,727	1,788	1,930
0,47	1,394	1,422	1,452	1,483	1,515	1,549	1,586	1,627	1,675	1,736	1,878
0,48	1,343	1,372	1,402	1,432	1,465	1,499	1,536	1,577	1,625	1,685	1,828
0,49	1,295	1,323	1,353	1,384	1,416	1,450	1,487	1,528	1,576	1,637	1,779
0,50	1,248	1,276	1,306	1,337	1,369	1,403	1,440	1,481	1,529	1,590	1,732
0,51	1,202	1,231	1,261	1,291	1,324	1,358	1,395	1,436	1,484	1,544	1,687
0,52	1,158	1,187	1,217	1,247	1,280	1,314	1,351	1,392	1,440	1,500	1,643
0,53	1,116	1,144	1,174	1,205	1,237	1,271	1,308	1,349	1,397	1,458	1,600
0,54	1,074	1,103	1,133	1,163	1,196	1,230	1,267	1,308	1,356	1,416	1,559
0,55	1,034	1,063	1,092	1,123	1,156	1,190	1,227	1,268	1,315	1,376	1,518
0,56	0,995	1,024	1,053	1,084	1,116	1,151	1,188	1,229	1,276	1,337	1,479
0,57	0,957	0,986	1,015	1,046	1,079	1,113	1,150	1,191	1,238	1,299	1,441
0,58	0,920	0,949	0,979	1,009	1,042	1,076	1,113	1,154	1,201	1,262	1,405
0,59	0,884	0,913	0,942	0,973	1,006	1,040	1,077	1,118	1,165	1,226	1,368
0,60	0,849	0,878	0,907	0,938	0,970	1,005	1,042	1,083	1,130	1,191	1,333
0,61	0,815	0,843	0,873	0,904	0,936	0,970	1,007	1,048	1,096	1,157	1,299
0,62	0,781	0,810	0,839	0,870	0,903	0,937	0,974	1,015	1,062	1,123	1,265
0,63	0,748	0,777	0,807	0,837	0,870	0,904	0,941	0,982	1,030	1,090	1,233
0,64	0,716	0,745	0,775	0,805	0,838	0,872	0,909	0,950	0,998	1,058	1,201
0,65	0,685	0,714	0,743	0,774	0,806	0,840	0,877	0,919	0,966	1,027	1,169
0,66	0,654	0,683	0,712	0,743	0,775	0,810	0,847	0,888	0,935	0,996	1,138
0,67	0,624	0,652	0,682	0,713	0,745	0,779	0,816	0,857	0,905	0,966	1,108
0,68	0,594	0,623	0,652	0,683	0,715	0,750	0,787	0,828	0,875	0,936	1,078
0,69	0,565	0,593	0,623	0,654	0,686	0,720	0,757	0,798	0,846	0,907	1,049
0,70	0,536	0,565	0,594	0,625	0,657	0,692	0,729	0,770	0,817	0,878	1,020
0,71	0,508	0,536	0,566	0,597	0,629	0,663	0,700	0,741	0,789	0,849	0,992
0,72	0,480	0,508	0,538	0,569	0,601	0,635	0,672	0,713	0,761	0,821	0,964
0,73	0,452	0,481	0,510	0,541	0,573	0,608	0,645	0,686	0,733	0,794	0,936
0,74	0,425	0,453	0,483	0,514	0,546	0,580	0,617	0,658	0,706	0,766	0,909
0,75	0,398	0,426	0,456	0,487	0,519	0,553	0,590	0,631	0,679	0,739	0,882
0,76	0,371	0,400	0,429	0,460	0,492	0,526	0,563	0,605	0,652	0,713	0,855
0,77	0,344	0,373	0,403	0,433	0,466	0,500	0,537	0,578	0,626	0,686	0,829
0,78	0,318	0,347	0,376	0,407	0,439	0,474	0,511	0,552	0,599	0,660	0,802
0,79	0,292	0,320	0,350	0,381	0,413	0,447	0,484	0,525	0,573	0,634	0,776
0,80	0,266	0,294	0,324	0,355	0,387	0,421	0,458	0,499	0,547	0,608	0,750
0,81	0,240	0,268	0,298	0,329	0,361	0,395	0,432	0,473	0,521	0,581	0,724
0,82	0,214	0,242	0,272	0,303	0,335	0,369	0,406	0,447	0,495	0,556	0,698
0,83	0,188	0,216	0,246	0,277	0,309	0,343	0,380	0,421	0,469	0,530	0,672
0,84	0,162	0,190	0,220	0,251	0,283	0,317	0,354	0,395	0,443	0,503	0,646
0,85	0,135	0,164	0,194	0,225	0,257	0,291	0,328	0,369	0,417	0,477	0,620
0,86	0,109	0,138	0,167	0,198	0,230	0,265	0,302	0,343	0,390	0,451	0,593
0,87	0,082	0,111	0,141	0,172	0,204	0,238	0,275	0,316	0,364	0,424	0,567
0,88	0,055	0,084	0,114	0,145	0,177	0,211	0,248	0,289	0,337	0,397	0,540
0,89	0,028	0,057	0,086	0,117	0,149	0,184	0,221	0,262	0,309	0,370	0,512
0,90	-	0,029	0,058	0,089	0,121	0,156	0,193	0,234	0,281	0,342	0,484
0,91	-	-	0,030	0,060	0,093	0,127	0,164	0,205	0,253	0,313	0,456
0,92	-	-	-	0,031	0,063	0,097	0,134	0,175	0,223	0,284	0,426
0,93	-	-	-	-	0,032	0,067	0,104	0,145	0,192	0,253	0,395
0,94	-	-	-	-	-	0,034	0,071	0,112	0,160	0,220	0,363
0,95	-	-	-	-	-	-	0,037	0,078	0,126	0,186	0,329



## Power factor correction of transformers MV/LV

Transformer power [kVA]	Standard		Low losse	
	Oil [kvar]	Resin [kvar]	Oil [kvar]	Resin [kvar]
<b>10</b>	1	1,5	–	–
<b>20</b>	2	1,7	–	–
<b>50</b>	4	2	–	–
<b>75</b>	5	2,5	–	–
<b>100</b>	5	2,5	1	2
<b>160</b>	7	4	1,5	2,5
<b>200</b>	7,5	5	2	2,5
<b>250</b>	8	7,5	2	3
<b>315</b>	10	7,5	2,5	3,5
<b>400</b>	12,5	8	2,5	4
<b>500</b>	15	10	3	5
<b>630</b>	17,5	12,5	3	6
<b>800</b>	20	15	3,5	6,5
<b>1000</b>	25	17,5	3,5	7
<b>1250</b>	30	20	4	7,5
<b>1600</b>	35	22	4	8
<b>2000</b>	40	25	4,5	8,5
<b>2500</b>	50	35	5	9
<b>3150</b>	60	50	6	10

## Power factor correction of asynchronous three-phase motors

Attention to possible self-excitation.

Motor power		Required reactive power [kvar]				
HP	KW	3000 rpm	1500 rpm	1000 rpm	750 rpm	500 rpm
<b>0,4</b>	<b>0,55</b>	–	–	0,5	0,5	–
<b>1</b>	<b>0,73</b>	0,5	0,5	0,6	0,6	–
<b>2</b>	<b>1,47</b>	0,8	0,8	1	1	–
<b>3</b>	<b>2,21</b>	1	1	1,2	1,6	–
<b>5</b>	<b>3,68</b>	1,6	1,6	2	2,5	–
<b>7</b>	<b>5,15</b>	2	2	2,5	3	–
<b>10</b>	<b>7,36</b>	3	3	4	4	5
<b>15</b>	<b>11</b>	4	5	5	6	6
<b>30</b>	<b>22,1</b>	10	10	10	12	15
<b>50</b>	<b>36,8</b>	15	20	20	25	25
<b>100</b>	<b>73,6</b>	25	30	30	30	40
<b>150</b>	<b>110</b>	30	40	40	50	60
<b>200</b>	<b>147</b>	40	50	50	60	70
<b>250</b>	<b>184</b>	50	60	60	70	80

## Typical Power Factor of few common loads

Type of user	cosφ	
Equipment powered by inverter	0,99	
Office appliances (computers, printers, etc)	0,7	
Fridges	0,8	
Commercial mall	0,85	
Office block	0,8	
Extruders	0,4÷0,7	
Resistor furnaces	1	
Arc furnaces	0,8	
Induction furnaces	0,85	
Photovoltaic system in spot trading	0,1÷0,9	
Incandescent lamps	1	
Discharge lamps	0,4÷0,6	
Fluorescent lamps without integrated PFC	0,5	
Fluorescent lamps with integrated PFC	0,9÷0,93	
LED lamps without integrated PFC	0,3÷0,6	
LED lamps with integrated PFC	0,9÷0,95	
Asynchronous motor	Load factor	
	0	0,2
	25%	0,55
	50%	0,72
	75%	0,8
	100%	0,85
Mechanical workshop	0,6÷0,7	
Wooden workshop	0,7÷0,8	
Hospital	0,8	
Glassworks	0,8	

## OUR BRANDS:



VOLTAGE STABILIZERS  
SAG COMPENSATORS  
LV TRANSFORMERS AND REACTORS



POWER FACTOR CORRECTION SYSTEMS  
ACTIVE HARMONIC FILTERS



ENERGY EFFICIENCY SMART DEVICES



ENERGY SAVING VOLTAGE OPTIMIZERS

# ORTEA NEXT

**Innovative solutions for sustainable  
power quality since 1969**

## ORTEA SPA

Via dei Chiosi, 21  
20873 Cavenago di Brianza MB | ITALY  
phone: +39 02 95 917 800  
email: sales@ortea.com

[WWW.ORTEANEXT.COM](http://WWW.ORTEANEXT.COM)



**The present document is reserved property of ORTEA SpA:**

it is compulsory to inform head office and ask for authorisation before proceeding with any release or reproduction.  
ORTEA SpA will not be held liable or responsible in any way for unauthorised copies, alterations or additions to the next or to the illustrated parts of this document. Any modification involving company logo, certification symbols, names and official data is strictly forbidden.  
In order to obtain better performance, ORTEA SpA reserves also the right to alter the products described in this document at any date and without prior notice. Technical data and descriptions do not therefore have any contractual value.